




ISO9001:2008 Certified

### Mechanical Specifications (mm)

|                                           |      |       |
|-------------------------------------------|------|-------|
| D:                                        | 23.0 | ± max |
| T:                                        | 10.0 | ± max |
| Lead Diameter                             | 1.0  | ± nom |
| S:                                        | 7.8  | ± nom |
| L:                                        | 38.0 | ± nom |
| Coating Lead Run Down<br>(straight Leads) | 4.0  | ± max |
| B:                                        | 9.20 | ± nom |
| C:                                        | 7.30 | ± nom |

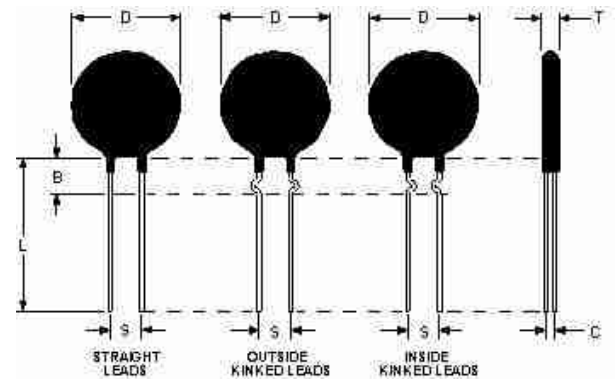

### Electrical Specifications

|                                       |         |        |
|---------------------------------------|---------|--------|
| Resistance:                           | 220. (Ω | ± 25 % |
| Max Steady State Current upto 65°C:   | 3.50    | A      |
| Max Rec. Energy Rating:               | 75      | J      |
| Actual Failure Instantaneous Energy:  | 175     | J      |
| Maximum Capacitance @ 120 VAC:        | 5,100   | µf     |
| Maximum Capacitance @ 240 VAC:        | 1,302   | µf     |
| Maximum Capacitance @ 440 VAC:        | 301     | µf     |
| Maximum Capacitance @ 680 VAC:        | 150     | µf     |
| Resistance @ 100% Max Current:        | 1.40    | Ω      |
| Resistance @ 50% Max Current:         | 2.75    | Ω      |
| Body Temperature at 100% Max Current: | 144.00  | °c     |
| Dissipation Constant:                 | 45.4    | mw/°c  |
| Thermal Time Constant:                | 114     | Sec.   |
| Material Type (for Beta and Curve):   | L       |        |

### MS22 22103

|                                                                                              |                          |
|----------------------------------------------------------------------------------------------|--------------------------|
| Date: 11/11/2008                                                                             | Drawn by: Erin Landis    |
| Ametherm, Inc.<br>3111 N. Deer Run Road<br>Carson City, Nevada USA 89701<br>www.ametherm.com | Approved By: Mehdi Samii |
|                                                                                              | Revision: a              |

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com