

# POWER TRANSFORMER CHASSIS MOUNT: TOROIDAL WORLD SERIES

# VPT100-5000

### **Electrical Specifications (@25C)**

1. Maximum Power: 500VA

2. Input Voltage: Series: 230VAC, 50/60Hz

Parallel: 115VAC, 50/60Hz 3. Output Voltage: Series: 100VAC CT @ 5.0A

Parallel: 50.0VAC @ 10.0A

4. Voltage Regulation: 5% TYP from full load to no load

5. Temperature Rise: 50°C TYP

6. Hipot: 4000VAC, Primary to Secondary

7. Efficiency: 94% TYP. @ full load

### Construction:

The toroidal construction inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class B (130°) insulation system.

### Safety:

World Series Transformers are designed and manufactured to meet most International Safety agency standards.

### **Agency File:**

UL: File E122529, UL 506

CE: EN 61558-1:2005, EN 61558-2-6:1995, Low Voltage Directive (LVD) EN 6-000-6-6:2001+A11:2004, EN 55014-1:2000+A1:2001+A2:2002, EN 6100-6-1:2001, EN 55014-2:1997+A1:2001, Electromagnetic Compatibility (EMC)



Dimensions (mm):

H*	I.D.	O.D.
60.0	46.0	140.0

\*Add 3mm to the height for mounting hardware Weight: 4.2Kg

### Mounting:

Transformer is provided with one metal mounting plate, two rubber pads, M8 x 70mm bolt, nut, spring and flat washer.

### **Connections:**

Transformer is provided with 12" (305mm) long, 0.50" (12.7mm) stripped and tinned, stranded UL 1015 lead wire.

Input<sup>1</sup>: Series – BLUE and BROWN, Jumper GRAY to VIOLET

Parallel – BLUE and BROWN, Jumper BLUE to VIOLET, GRAY to BROWN

Output<sup>1</sup>: Series – BLACK and YELLOW, Jumper RED to ORANGE


Parallel - BLACK and YELLOW, Jumper BLACK to ORANGE, RED to YELLOW


\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

22520B Temescal Canyon Road Corona, California 92883



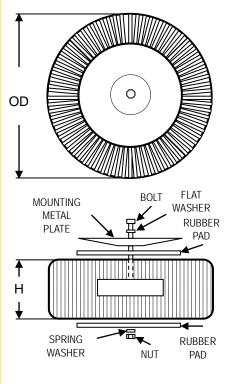



Release Date: May 3, 2011

 $<sup>^{\</sup>mathrm{1}}$  Primary and secondary windings are designed to be connected in series or parallel. Windings are not intended to be used independently.

# AMEYA360 Components Supply Platform

# **Authorized Distribution Brand:**

























## Website:

Welcome to visit www.ameya360.com

## Contact Us:

## > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

## Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

## Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com