

Main product characteristics

| | |
|----------------|--------|
| $I_{F(AV)}$ | 1.5 A |
| V_{RRM} | 200 V |
| T_j (max) | 175° C |
| V_F (typ) | 0.7 V |
| t_{rr} (typ) | 15 ns |


Features and benefits

- Very low conduction losses
- Negligible switching losses
- Low forward and reverse recovery times
- High junction temperature

Description

The STTH1R02 uses ST's new 200 V planar Pt doping technology, and it is specially suited for switching mode base drive and transistor circuits.

Packaged in DO-41, DO-15, SMA, and SMB, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection.

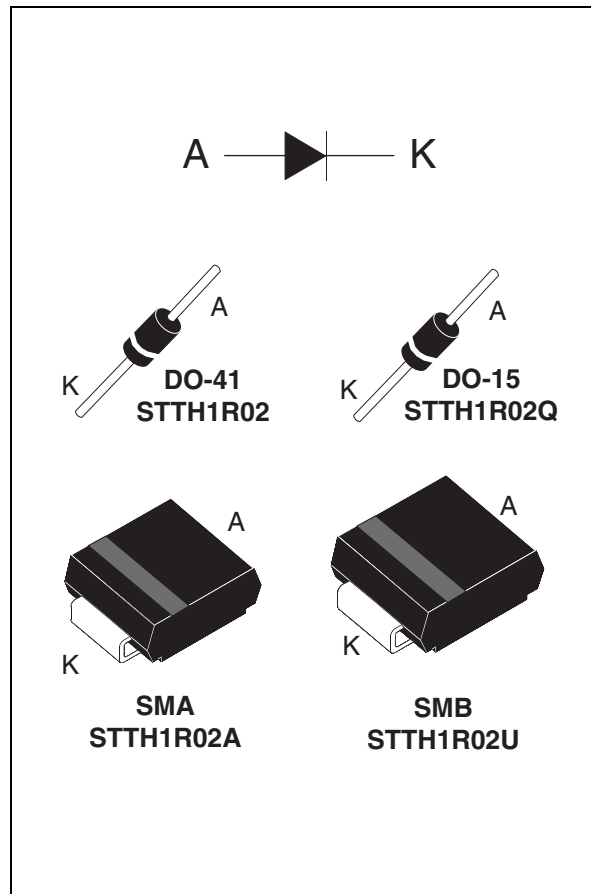

Order codes

| Part Number | Marking |
|-------------|-----------|
| STTH1R02 | STTH1R02 |
| STTH1R02RL | STTH1R02 |
| STTH1R02A | R1A |
| STTH1R02Q | STTH1R02Q |
| STTH1R02QRL | STTH1R02Q |
| STTH1R02U | 1R2S |

1 Characteristics

Table 1. Absolute ratings (limiting values at $T_j = 25^\circ\text{C}$, unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|--------------|---|----------------------------------|--|------------------|---|
| V_{RRM} | Repetitive peak reverse voltage | | 200 | V | |
| I_{FRM} | Repetitive peak forward current | DO-41 ⁽¹⁾ | $t_p = 5\ \mu\text{s}$, $F = 5\ \text{kHz}$ | 30 | A |
| | | DO-15 ⁽¹⁾ | | | |
| | | SMA / SMB | | | |
| $I_{F(RMS)}$ | RMS forward current | DO-41 / DO-15 | 50 | A | |
| | | SMA /SMB | | | |
| $I_{F(AV)}$ | Average forward current, $\delta = 0.5$ | DO-41 | $T_{lead} = 110^\circ\text{C}$ | 1.5 | A |
| | | DO-15 | $T_{lead} = 110^\circ\text{C}$ | | |
| | | SMA | $T_c = 110^\circ\text{C}$ | | |
| | | SMB | $T_c = 110^\circ\text{C}$ | | |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10\ \text{ms}$ Sinusoidal | 60 | A | |
| T_{stg} | Storage temperature range | | -65 to + 175 | $^\circ\text{C}$ | |
| T_j | Maximum operating junction temperature | | 175 | $^\circ\text{C}$ | |

1. On infinite heatsink with 10 mm lead length

Table 2. Thermal parameters

| Symbol | Parameter | | Value | Unit | |
|---------------|------------------|--|-------|------|--------------------|
| $R_{th(j-l)}$ | Junction to lead | Lead Length = 10 mm on infinite heatsink | DO-41 | 45 | $^\circ\text{C/W}$ |
| | | | DO-15 | 45 | |
| $R_{th(j-c)}$ | Junction to case | SMA | 30 | | |
| | | SMB | 30 | | |

Table 3. Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ | Max. | Unit |
|-------------|-------------------------|---------------------------|-----------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25^\circ\text{C}$ | $V_R = V_{RRM}$ | | | 3 | μA |
| | | $T_j = 125^\circ\text{C}$ | | | 2 | 20 | |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25^\circ\text{C}$ | $I_F = 4.5\ \text{A}$ | | | 1.2 | V |
| | | $T_j = 25^\circ\text{C}$ | $I_F = 1.5\ \text{A}$ | | 0.89 | 1 | |
| | | $T_j = 100^\circ\text{C}$ | | | 0.76 | 0.85 | |
| | | $T_j = 150^\circ\text{C}$ | | | 0.70 | 0.80 | |

1. Pulse test: $t_p = 5\ \text{ms}$, $\delta < 2\ \%$

2. Pulse test: $t_p = 380\ \mu\text{s}$, $\delta < 2\ \%$

To evaluate the conduction losses use the following equation:

$$P = 0.68 \times I_{F(AV)} + 0.08 I_{F(RMS)}^2$$

Table 4. Dynamic characteristics

| Symbol | Parameter | Test conditions | Min. | Typ | Max. | Unit |
|----------|--------------------------|---|------|-----|------|------|
| t_{rr} | Reverse recovery time | $I_F = 1\text{ A}$, $di_F/dt = -50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25^\circ\text{ C}$ | | 23 | 30 | ns |
| | | $I_F = 1\text{ A}$, $di_F/dt = -100\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25^\circ\text{ C}$ | | 15 | 20 | |
| I_{RM} | Reverse recovery current | $I_F = 1.5\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 160\text{ V}$, $T_j = 125^\circ\text{ C}$ | | 3 | 4 | A |
| t_{fr} | Forward recovery time | $I_F = 1.5\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$, $T_j = 25^\circ\text{ C}$ | | 50 | | ns |
| V_{FP} | Forward recovery voltage | $I_F = 1.5\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$, $T_j = 25^\circ\text{ C}$ | | 2.1 | | V |

Figure 1. Peak current versus duty cycle

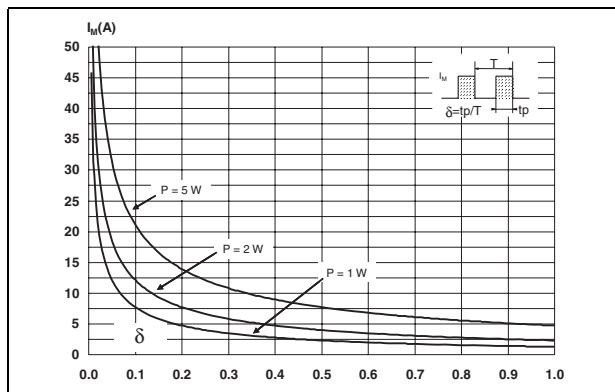


Figure 2. Forward voltage drop versus forward current (typical values)

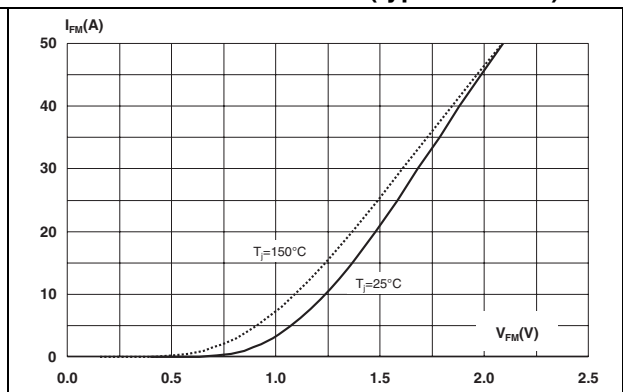


Figure 3. Forward voltage drop versus forward current (maximum values)

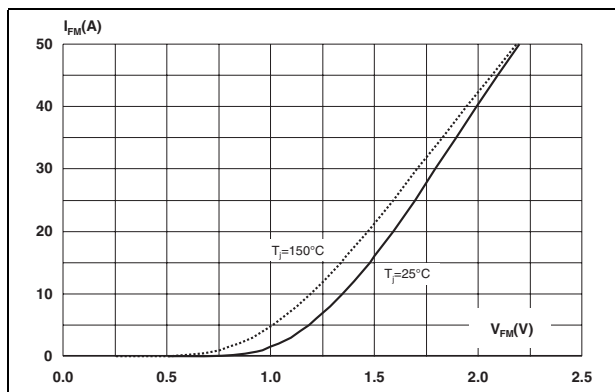


Figure 4. Relative variation of thermal impedance junction to case versus pulse duration (SMA)

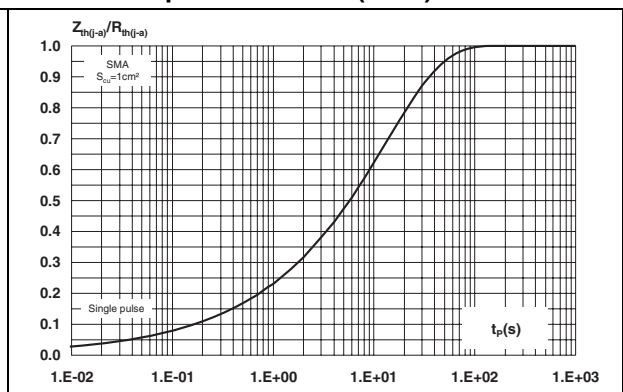


Figure 5. Relative variation of thermal impedance junction to case versus pulse duration (SMB)

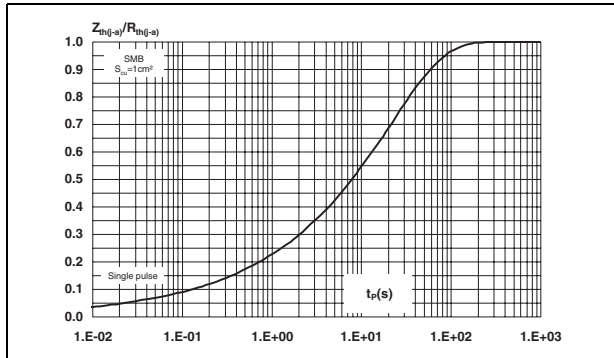


Figure 6. Relative variation of thermal impedance junction to case versus pulse duration (DO-41)

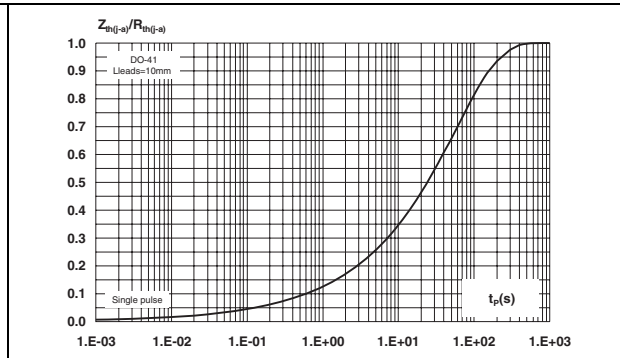


Figure 7. Relative variation of thermal impedance junction to case versus pulse duration (DO-15)

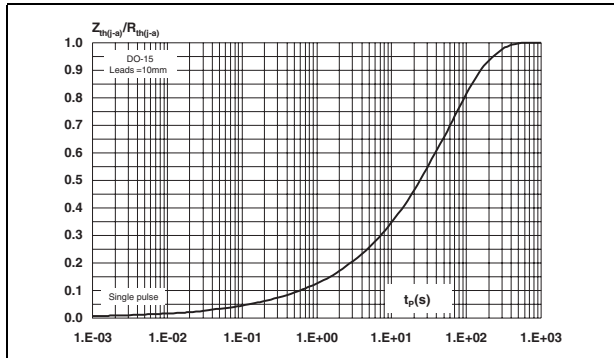


Figure 8. Junction capacitance versus reverse applied voltage (typical values)

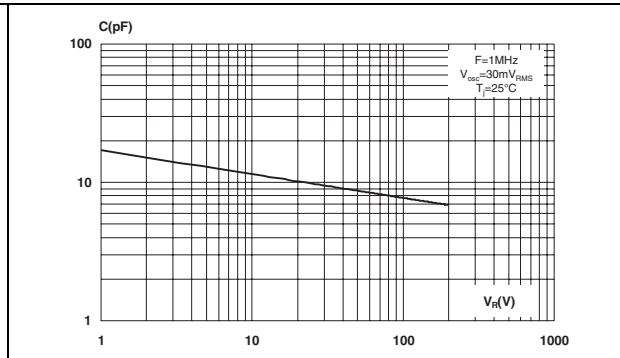


Figure 9. Reverse recovery charges versus di_F/dt (typical values)

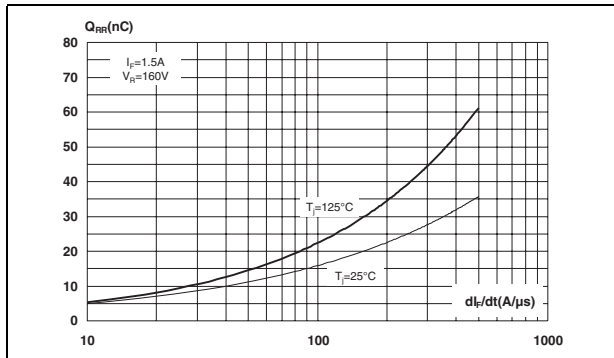


Figure 10. Reverse recovery time versus di_F/dt (typical values)

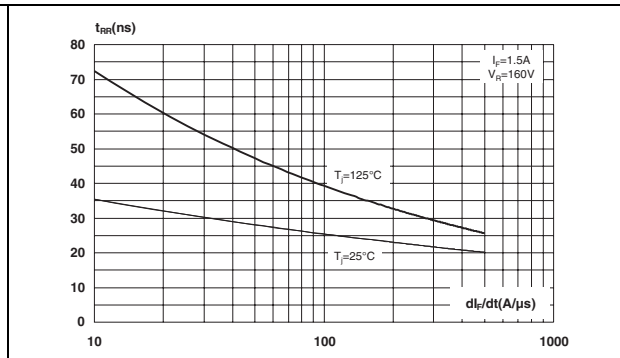


Figure 11. Peak reverse recovery current versus di_F/dt (typical values)

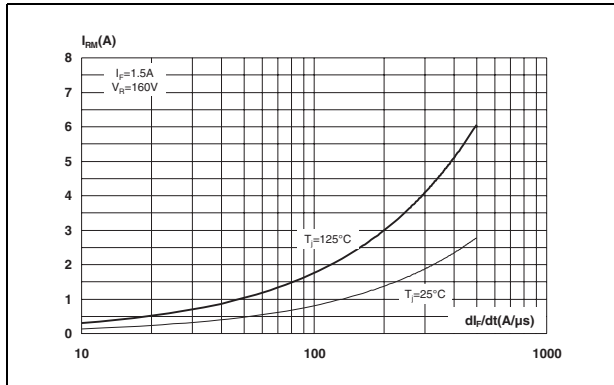


Figure 12. Dynamic parameters versus junction temperature

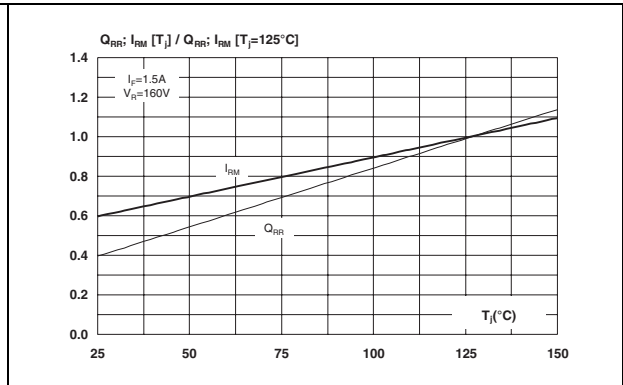


Figure 13. Thermal resistance, junction to ambient, versus copper surface under each lead - SMA (Epoxy FR4, copper thickness = 35 μm)

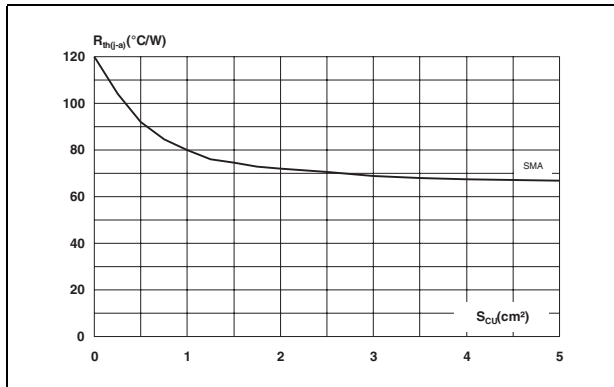


Figure 14. Thermal resistance, junction to ambient, versus copper surface under each lead - SMB (Epoxy FR4, copper thickness = 35 μm)

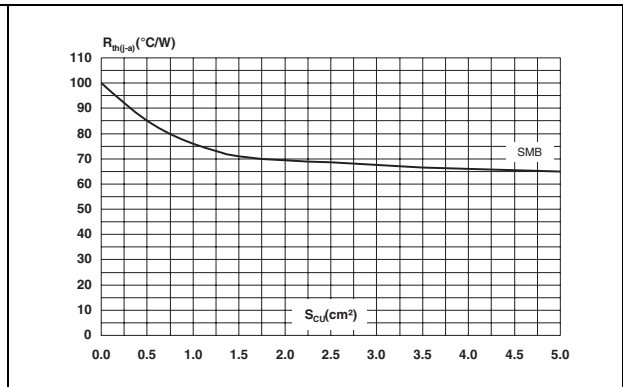


Figure 15. Thermal resistance, junction to ambient, versus copper surface under each lead - DO 15 (Epoxy FR4, copper thickness = 35 μm)



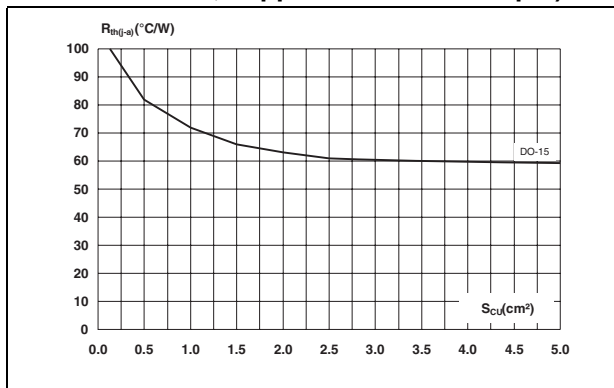


Figure 16. Thermal resistance, junction to ambient, versus copper surface under each lead - DO-41 (Epoxy FR4, copper thickness = 35 μm)

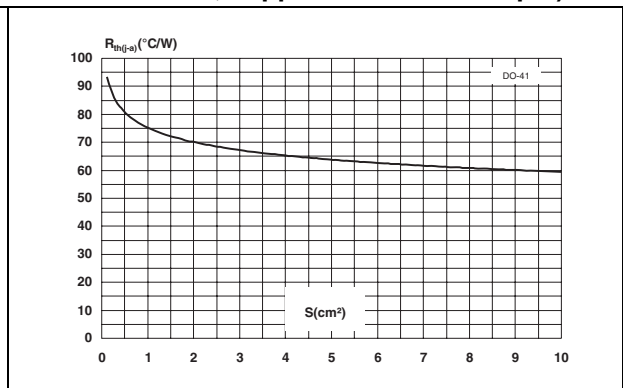

2 Ordering information scheme

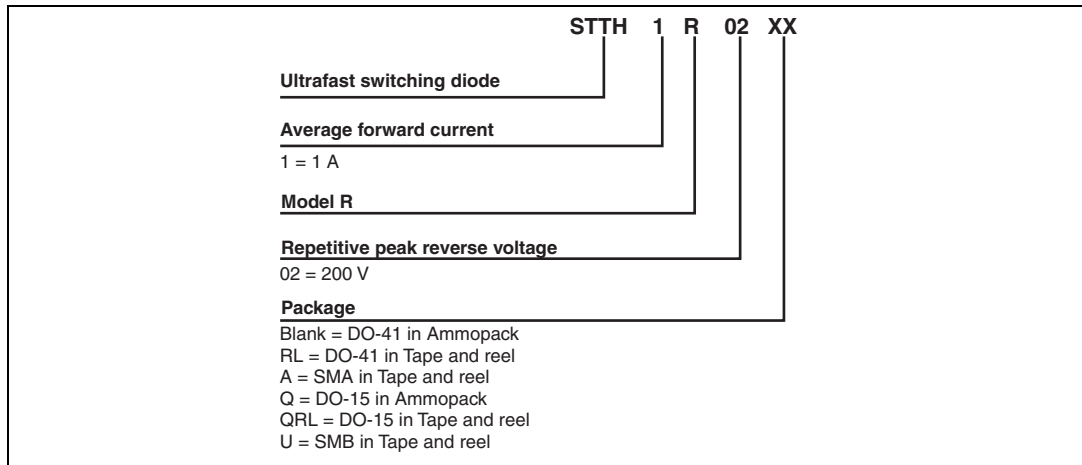

3 Package information

- Epoxy meets UL94, V0

Table 5. DO-41 dimensions

| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 4.1 | 5.20 | 0.160 | 0.205 |
| B | 2 | 2.71 | 0.080 | 0.107 |
| C | 25.4 | | 1 | |
| D | 0.712 | 0.863 | 0.028 | 0.034 |

Table 6. DO-15 dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 6.05 | 6.75 | 0.238 | 0.266 |
| B | 2.95 | 3.53 | 0.116 | 0.139 |
| C | 26 | 31 | 1.024 | 1.220 |
| D | 0.71 | 0.88 | 0.028 | 0.035 |

Table 7. SMA dimensions

| REF. | DIMENSIONS | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.03 | 0.075 | 0.080 |
| A2 | 0.05 | 0.20 | 0.002 | 0.008 |
| b | 1.25 | 1.65 | 0.049 | 0.065 |
| c | 0.15 | 0.41 | 0.006 | 0.016 |
| E | 4.80 | 5.60 | 0.189 | 0.220 |
| E1 | 3.95 | 4.60 | 0.156 | 0.181 |
| D | 2.25 | 2.95 | 0.089 | 0.116 |
| L | 0.75 | 1.60 | 0.030 | 0.063 |

Figure 17. SMA footprint (dimensions in mm)


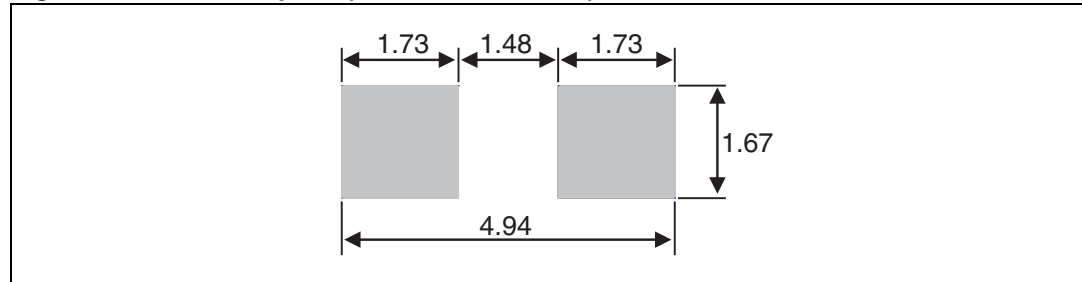


Table 8. SMB dimensions

| Ref. | Dimensions | | | |
|------|-------------|------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.075 | 0.096 |
| A2 | 0.05 | 0.20 | 0.002 | 0.008 |
| b | 1.95 | 2.20 | 0.077 | 0.087 |
| c | 0.15 | 0.41 | 0.006 | 0.016 |
| E | 5.10 | 5.60 | 0.201 | 0.220 |
| E1 | 4.05 | 4.60 | 0.159 | 0.181 |
| D | 3.30 | 3.95 | 0.130 | 0.156 |
| L | 0.75 | 1.60 | 0.030 | 0.063 |

Figure 18. SMB footprint (dimensions in mm)

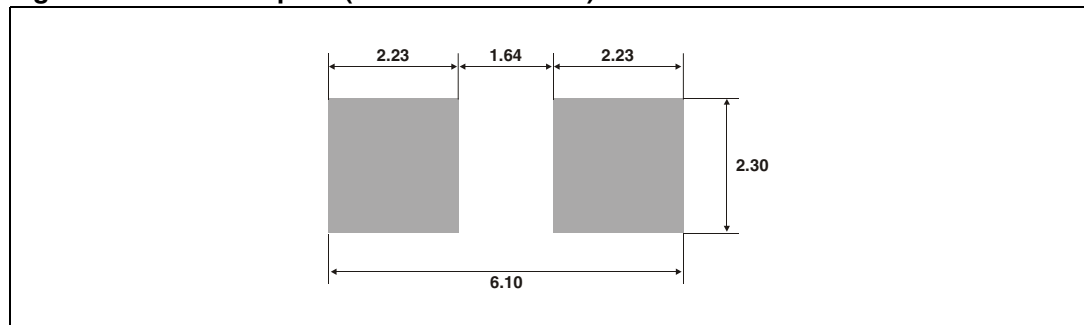

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

4 Ordering information

| Part Number | Marking | Package | Weight | Base qty | Delivery mode |
|-------------|-----------|---------|---------|----------|---------------|
| STTH1R02 | STTH1R02 | DO-41 | 0.34 g | 2000 | Ammopack |
| STTH1R02RL | STTH1R02 | DO-41 | 0.34 g | 5000 | Tape and reel |
| STTH1R02A | R1A | SMA | 0.068 g | 5000 | Tape and reel |
| STTH1R02Q | STTH1R02Q | DO-15 | 0.49 g | 1000 | Ammopack |
| STTH1R02QRL | STTH1R02Q | DO-15 | 0.49 g | 6000 | Tape and reel |
| STTH1R02U | 1R2S | SMB | 0.11 g | 2500 | Tape and reel |

5 Revision history

| Date | Revision | Description of changes |
|-------------|----------|---|
| 03-May-2006 | 1 | First issue |
| 13-Oct-2006 | 2 | Added DO-15 and SMB packages. |
| 08-Mar-2007 | 3 | Replaced Figure 8. Replaced e_{Cu} with copper thickness. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com