


920-0011-01 - Qty. Ten 0.1" Spacing 40-Single Row Headers



LTR	Part Name	Material	Description
1	Housing	PBT UL94V-0	200° C for 20 Seconds. Initial : 1000M Ohms Min. After Test : 500M Ohms Min.
2	Contact	Brass C2600	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.

Normal Force : 800 Grams Average.
Temperature Rating : -40°C ~ +125°C.
Dielectric Withstanding Voltage : 1000V AC/Min

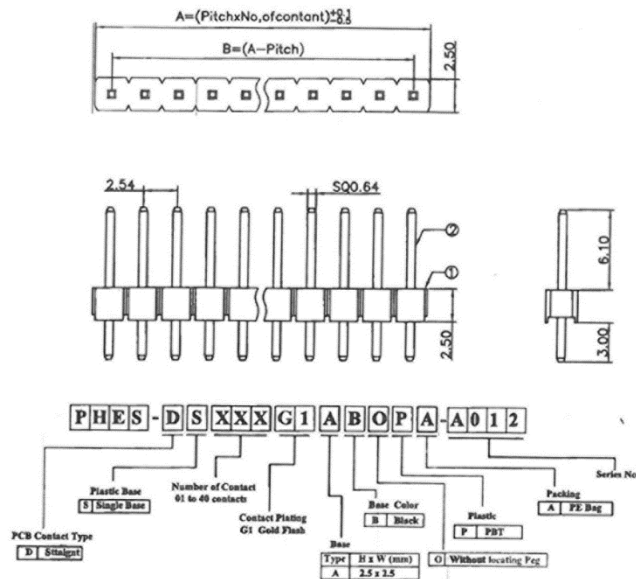

P.C.B LAYOUT

L=11.6 mm

RoHS compliant



Qty. Ten 0.1" Spacing 40-Single Row Headers

Breakable for use in whatever quantity you need from 1 to 40; 11.5mm long, .1" spacing, perfect for use with most Schmartboards and breadboards; Schmartboard headers are always immersed in gold to assure the best connection and to avoid oxidation.

Schmartboard Accessory Family



Schmartboard, Inc.
37423 Fremont Blvd.
Fremont, CA 94536

510-744-9900(P)
510-744-9909(F)
<http://www.schmartboard.com>
<http://www.facebook.com/Schmartboard>
<http://www.twitter.com/Schmartboard>

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com