


rfid as a feature



SkyeModule M1-Mini

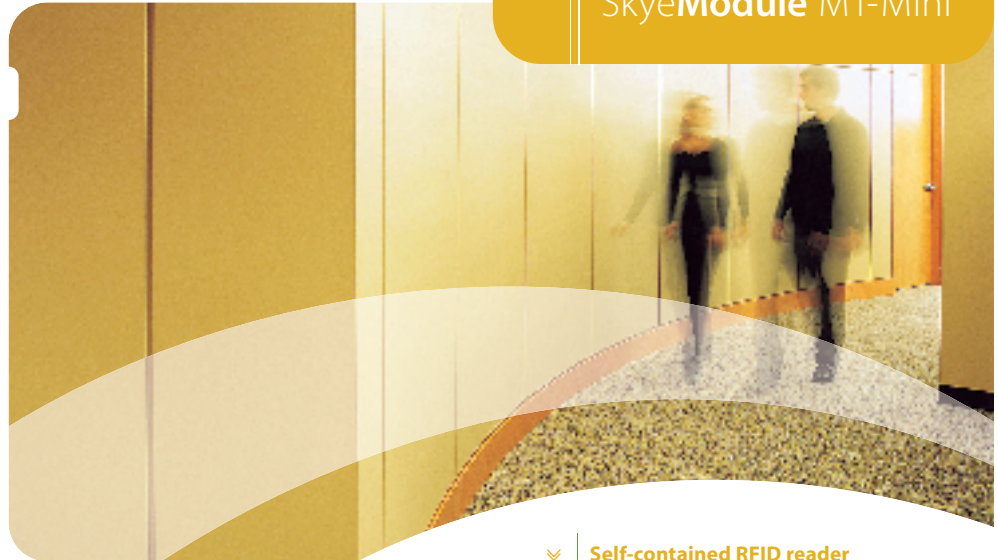

Self-contained RFID reader

FEATURES:

- Tagnostic™
- UART (TTL), I2C, SPI,
- Configurable Power Schema
- Simple and Intuitive API
- Efficient HW/ SW Design

BENEFITS:

- Variety of Tag Vendor Choices
- Easy to Embed
- Low Power Consumption
- Fast Integration /Time to Market
- Low Cost and Small Size

Product Overview

The SkyeModule™ M1-Mini provides a low power, high performance, and cost effective platform designed to enable any device with RFID reader technology. The M1-Mini is the world's smallest, self-contained multi-protocol 13.56 MHz OEM module. It is capable of reading and writing to transponders based on ISO 15693, ISO 14443A, and ISO18000-3 air-interface protocols. The M1-Mini features an on-board antenna as well as the ability to attach a standard 50 Ohm external antenna for improved read-range. Three interface options are available to provide communication to embedded host systems: UART (TTL), I2C, and SPI. With its' on-board power regulator circuit, the M1-Mini can operate from 3.2-6.0V; while the power management intelligence allows current to be set as low as 50 μ A (Sleep Mode) making it ideal for use in battery operated devices. Further power efficiency is gained by use of the Start-Up command in which one stores a command to be executed once the M1-Mini is awake from Sleep Mode. Software-adjustable baud rates from 4800 to 57600 bits per second offer the user choices to accommodate their host processor requirements. Field upgradeable firmware provides forward compatibility for adding future tag protocols and features.

Applications

The SkyeModule M1-Mini has been created specifically to address a wide spectrum of applications offering the most flexibility in the industry. Some areas in which the M1-Mini has been successfully integrated include:

- Medical equipment for the healthcare and pharmaceutical industries
- Industrial equipment requiring embedded RFID technology
- Kiosks and vending machines
- Mobile devices including printers, hand-helds, and sensor networks

With the variety of host interfaces, supply voltages, and configurable parameters, customers found the M1-Mini was easy to embed in these devices.

About Skyetek:

SkyeTek, Inc., maker of ReaderWare™, is the leading supplier of RFID reader software and reference designs that enable the pervasive adoption of RFID technology. SkyeTek's Tagnostic™ reader technology works with most industry standard tags and smart labels, its low power requirements and a small form factor make it the optimal choice for embedding into new or existing products. SkyeTek's RFID reader technology is available in several formats including reader modules, hardware reference designs, and the ReaderWare™ software suite. SkyeTek markets to OEM customers in targeted vertical markets with several high-volume licensing options available. For more information about SkyeTek, visit www.skyetek.com or call 720-565-0441.

SkyeTek is based in Colorado.

Our Address: 11030 Circle Point Road
Ste 300, Westminster, CO 80020 USA

**SkyeModule M1-Mini****Transponder Support¹**

Product Name	Memory (bits)	Manufacturer	Protocol
Tag-It HF-I	2K	Texas Instruments	ISO15693
I-Code SL2	1K	Philips	ISO15693
My-d	2.5k, 10K	Infineon	ISO15693
LRI64	64	ST Microelectronics	ISO15693
LRI512, LRI2K	0.5K, 2K	ST Microelectronics	ISO15693EM
4135	2.2K	EM Microelectronics	ISO15693
PicoTag ³	2K, 16K	Inside Contactless	Proprietary
Mifare ²	1K, 4K (byte)	Philips, Infineon	ISO14443A
Mifare Ultralight ³	0.5K	Philips	ISO14443A
GemWave	id only	TagSys	Proprietary
Tag-It HF	0.25K	Texas Instruments	Proprietary
I-Code SL1	0.5K	Philips	Proprietary
AT88RF319	32K	Atmel	ECMA-319

¹Firmware version dependent

²ID only

³No Anti-Collision

Frequency

13.56 MHz +/- 7 kHz

Physical

Diameter: 25.4mm

Height: 2.8 mm

Current Consumption

Sleep Mode- 50 µA

Idle Mode- 15mA

Scan Mode- 60mA

Supply Voltage

3.2-6.0V

Antenna

Internal or external

50 ohm port

Host Communication Interfaces/ Data Rates

UART (TTL): 4800-57600 bps

I2C up to 400 kHz

SPI up to 3MHz

Transponder**Communication Rate**

26 kbps ISO 15693

106 kbps ISO 14443A

Accessories

EA1 external antenna
(94mmx94mm)

Effective Range

Internal Antenna, 48 mm x
76 mm ISO 15693

transponder: 5.0 cm

Internal Antenna, 38 mm x

22.5 mm ISO 15693

transponder: 3.5 cm

(Individual results may
vary with environment)

Other Offerings from SkyeTek

SkyeTek provides a variety of reader technology at both 13.56 MHz (HF) and ~900 MHz (UHF). The M1, also part of the SkyeModule HF line, is slightly larger than the M1-Mini and adds 8 GPIO pins and native support for RS232 host interface. ReaderDNA, a comprehensive reference design, is available for component level integration of the technology including complete design files, BOM, and test fixture. ReaderWare, an open-architected software suite residing on all SkyeTek's modules, provides intelligence for the RFID reader. The SkyeModule M8 is a low power, compact, UHF reader compatible with EPC and ISO transponders. All SkyeModules are controlled via the SkyeTek Protocol, a powerful but simple communication protocol that grants the user access to all features of an RFID transponder. Further, they have been designed with flexible and modular embedded software that allows one to select only the desired features.



Copyright © 2005 SkyeTek, Inc.

Tagnostic™, ReaderWare™, and SkyeModule™ are trademarks or registered trademarks of SkyeTek, Inc. All other trademarks or brand names are the properties of their respective holders. Features and specifications are subject to change without notice.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com