

Conformity to RoHS Directive

SHAPES AND DIMENSIONS



This width is 50Ω.
Micro-strip line for 0.4mm thick glass-epoxy substrate.

0.25

0.25

0.6

0.3

0.6

0.3

0.7

0.3

0.3

Ø0.3 Through-hole

Dimensions in mm


Frequency range	824 to 915MHz	
Coupling factor	16.0±1.0dB	
Insertion loss	0.30dB max.*1 0.35dB max.*2	
Isolation	25dB min.	
VSWR	1.3 max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C

*2 Operating temperature


- All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


COUPLING

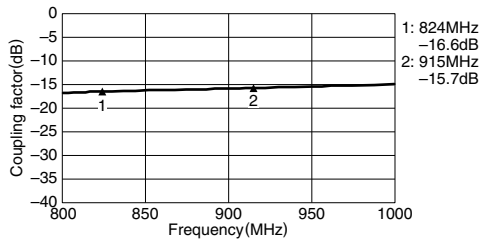


ISOLATION

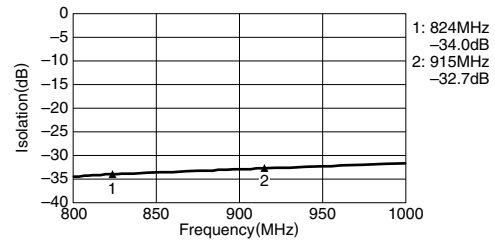

INSERTION LOSS

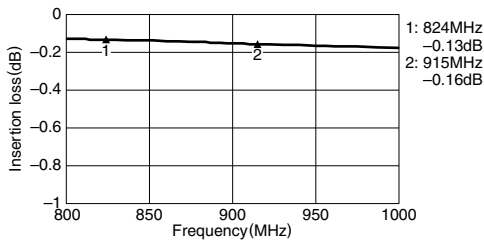

VSWR

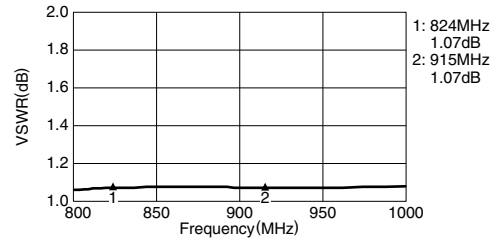

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com