





P.C. MOUNTING

O.P. (MM)	P.T. (MM)
7.75 ± 0.75	1.8 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REFERENCE ONLY.
- ▲4. RATING: .1A @ 5V DC
5. CONTACT MATERIAL: SILVER
6. MECHANICAL LIFE: 300,000 CYCLES MIN.
7. ELECTRICAL LIFE: 10,000 CYCLES MIN.
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MIN.
- ▲9. OPERATING FORCE: 55gf
10. OPERATING TEMP: -25° C TO 85° C
- ▲11. DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
13. INSUL. RESISTANCE: 100 MEGA-OHMS MIN.

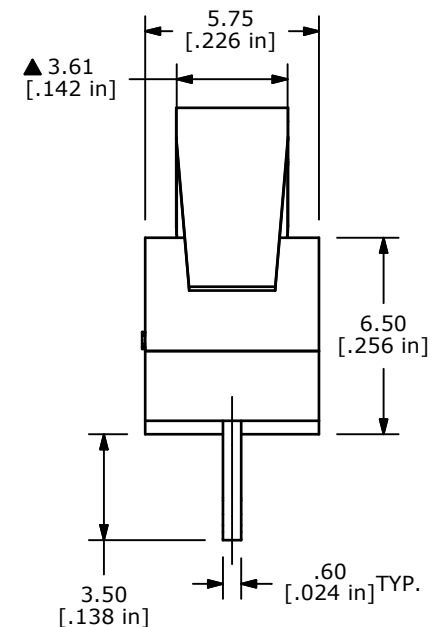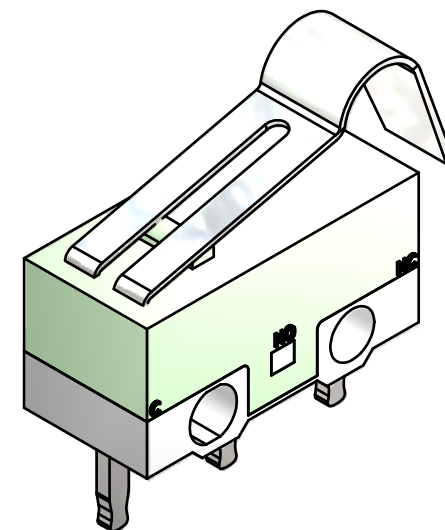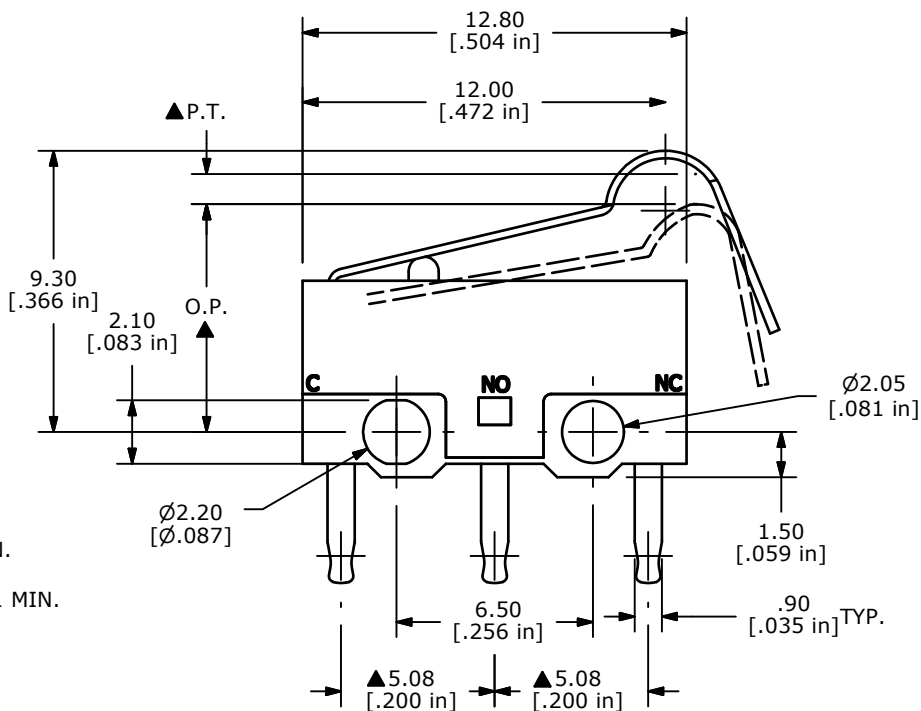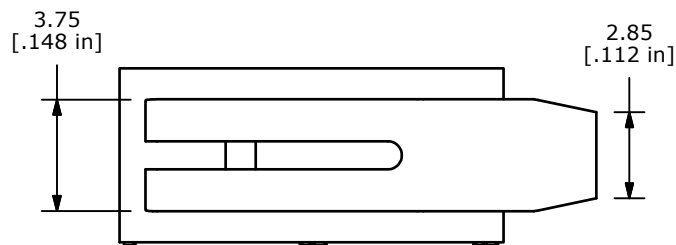

TITLE DM085Q103F055P1A

SCALE 4:1

DATE 7/23/2007

DR BF

DWG P030013

REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com