

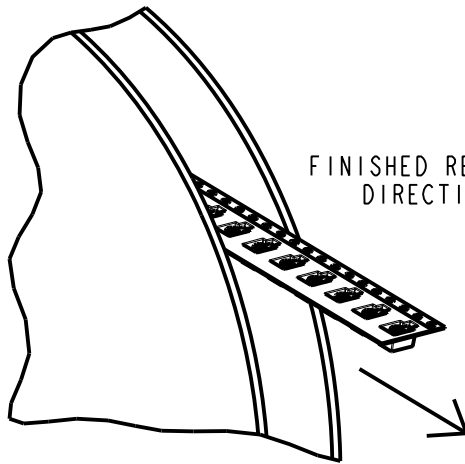
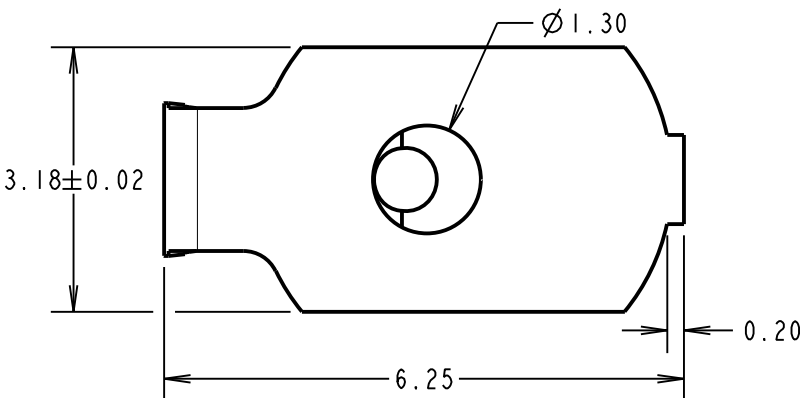
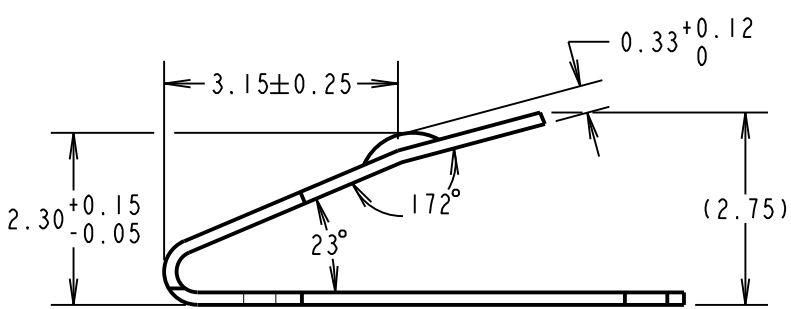
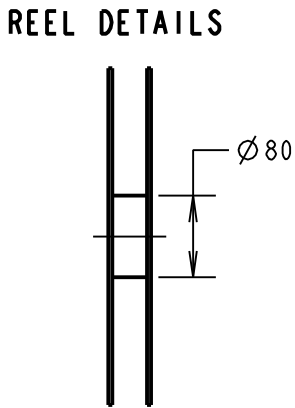
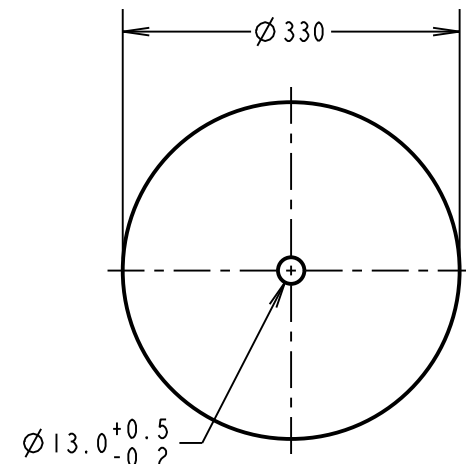
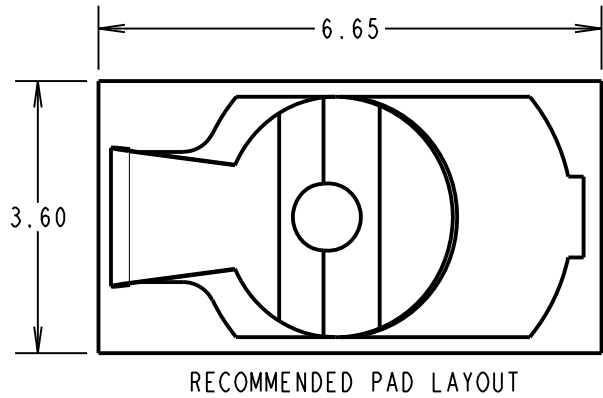
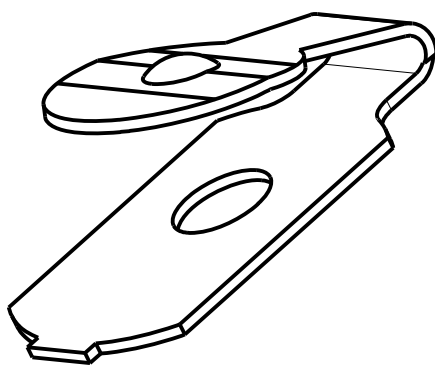


Customer Information Sheet

DRAWING No.: S7081-42R SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

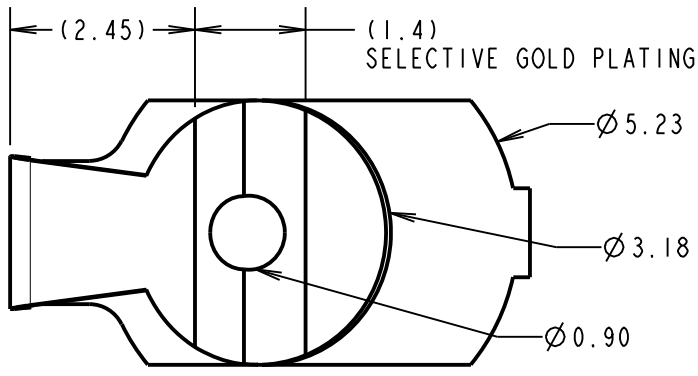

FINISHED REELING
DIRECTION

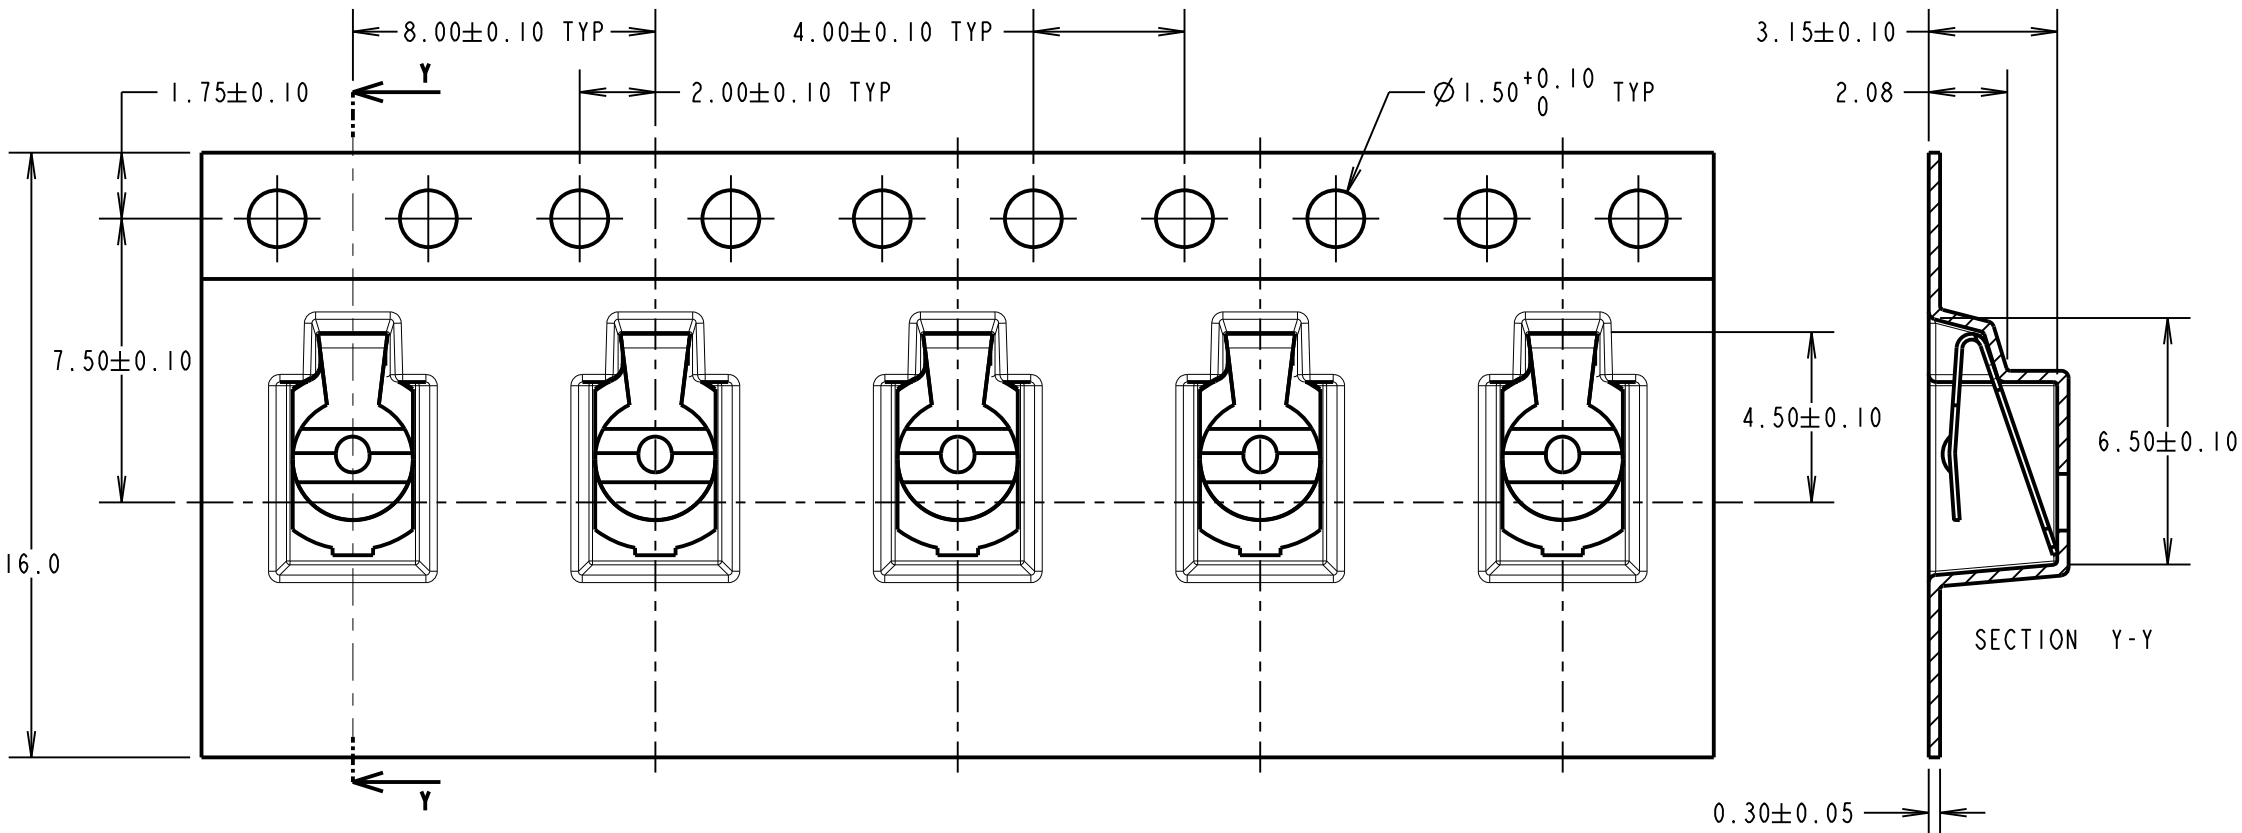

COMPONENT SPECIFICATION
MATERIAL = TITANIUM COPPER ALLOY,
0.15mm THICK
FINISH = 0.7µ-1.3µ NICKEL, GOLD FLASH
ON CONTACTS AND 2.54µ MIN 100%
TIN ON FOOT AREA.
RECOMMENDED WORKING HEIGHT = 2.10mm / MIN FORCE = 1.2N
RECOMMENDED MINIMUM WORKING HEIGHT = 1.70mm
ELECTRICAL:
CONTACT RATING = 4A
MECHANICAL:
DURABILITY = 1000 CYCLES
ENVIRONMENTAL:
OPERATING TEMPERATURE = -55°C TO +125°C

NOTES:
1. QUANTITY PER REEL = 2500.
2. ALL TOLERANCES ARE: X.X = ±0.30mm
X.XX = ±0.15mm
ANGLES = ±2.0°
UNLESS OTHERWISE STATED.

SB	6	20.11.13	12234
NAME	ISS.	DATE	C/NOTE
APPROVED: S.BENNETT			
CHECKED: S.FLOWER			
DRAWN: R.ADDE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN
www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE:
SMT SHIELD FINGER (2.75mm)
IN TAPE AND REEL
DRAWING NUMBER:
S7081-42R
SHT
2 OF 2

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com