

Model



TCDC - 120A12 - R7

Desktop Switching Power Supply



Design Features

- Wide AC Input Range
- Built in Active PFC
- No Load Power < 0.5W
- Quasi resonant switching for low noise & high efficiency



Applications

- Two way radio base stations
- Communications Systems
- Security Systems
- GPS Receivers
- 12 volt Lighting Systems
- OEM Applications

Specifications

Input Voltage Range	90 ~ 264VAC 47~63Hz
Output Voltage	13.8 VDC
Output Ripple & Noise (on full load, peak to peak)	100mV
Full Load Efficiency	88% typical @ 230 VAC
Output Current , continuous rated	10A
Cooling	Temperature Controlled Fan
Protections	Over Current , Short Circuit, Over Voltage and Over Temperature
Operating Temperature Range	0 ~ 50 c°
AC Input	Detachable Power Cord C / W NEMA 5- 15 P Plug
Dimensions (LxWxH) / mm	178 x 211x 56
Weight / lbs.	3.0
Safety Certification	UL / CSA / EN60950
EMC Conformity	FCC Part 15(B) , Class B Digital Device

Model




TCDC - 120A12 - R7

Desktop Switching Power Supply



Mechanical Specifications

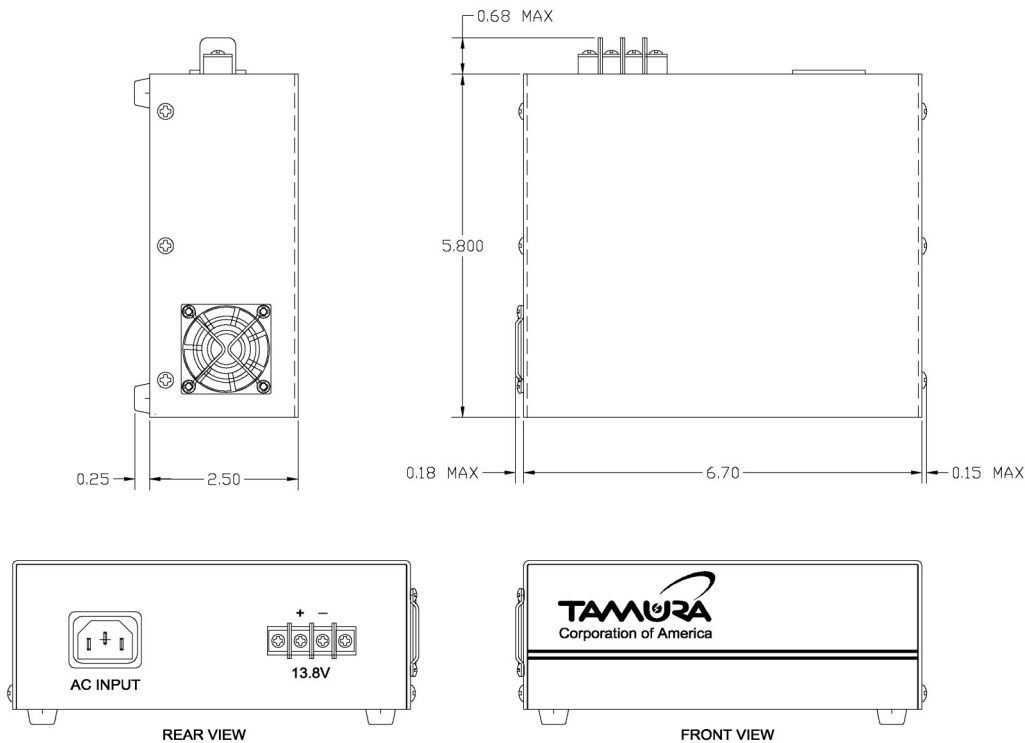

For use in Controlled Environment, see Installation Guide Warnings and Restrictions.

Safety Specifications

- Component Certification in accordance with CSA / UL 60950 (for CSS/NRTL)
- EN 60950 (for CE)
- RoHS Directive (for CE)
- EMC Directive (for CE)
- Complies with CEC Energy Efficiency STDS

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com