


| SPECIFICATIONS              |                                                                                                            |                                                              |
|-----------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| SILIKROME®<br>Material      | GRADE                                                                                                      |                                                              |
|                             | COMMERCIAL                                                                                                 | MILITARY                                                     |
|                             | Silicone Rubber<br>ASTM D 1418                                                                             | Silicone Rubber<br>conforming to A-A-59588<br>Class II GR 50 |
| Temperature<br>Range        | -112°F to +400°F<br>(-80°C to +204°C)                                                                      | -160°F to +450°F<br>(-106°C to +260°C)                       |
|                             | -112°F to +575°F<br>(-80°C to +302°C)                                                                      |                                                              |
| Shelf Life                  | 25 Years (minimum)                                                                                         |                                                              |
| Resistant to                | Salt spray, sunlight, ozone, cleaning solutions,<br>and most acids                                         |                                                              |
| Physical<br>Characteristics | Flexible, non-breakable, re-usable. Acts as<br>shock mount. Protects against shattering.<br>Easy to mount. |                                                              |

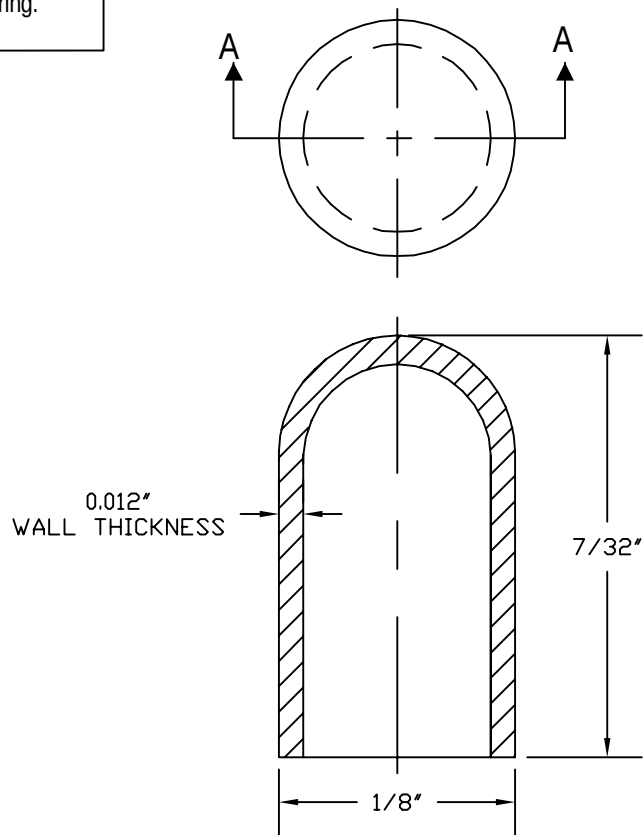

SECTION AA

|                                                                         |                           |                         |                                                                |                 |                     |          |          |
|-------------------------------------------------------------------------|---------------------------|-------------------------|----------------------------------------------------------------|-----------------|---------------------|----------|----------|
| D                                                                       | REDRAWN and MAT'L CHANGED |                         |                                                                |                 | S. GOK              | 05.28.09 |          |
| C                                                                       | CAD COMPUTER GENERATED    |                         |                                                                |                 |                     | 01.10.03 |          |
| B                                                                       | DWG NO. & P/N WAS 1813/7  |                         |                                                                |                 | NICK                | 06.14.65 |          |
| A                                                                       | REVISED TO ROUND TOP      |                         |                                                                |                 | NICK                | 12.11.64 |          |
| REV.                                                                    | DESCRIPTION               |                         |                                                                |                 |                     | DATE     |          |
| MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION. |                           | TITLE                   | SILIKROMES® COLORED<br>FILTERS FOR INCANDESCENT<br>T-3/4 LAMPS |                 | ENG.                | S. GOK   | 05.28.09 |
|                                                                         |                           |                         |                                                                |                 | DWN.                | ED       | 05.25.62 |
|                                                                         |                           |                         |                                                                |                 | CHKD.               | J. CELLA | 05.28.09 |
| COLOR:<br>SPECIFY                                                       |                           | APM-HEXSEAL CORPORATION |                                                                | SCALE<br>10 : 1 | DWG. NO.<br>1813/23 |          |          |

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.  
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
  
Email        amall@ameya360.com  
  
QQ          800077892  
  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel          +86 (21) 64016692-8333  
  
Email        mkt@ameya360.com