

	TYPE	NUMBER		GS-12-113	
	PRODUCT SPECIFICATION	PAGE	1 OF 7	REV: B	
TITLE		CARD BUS I , EJECTOR HEADER		AUTHORIZED BY	DATE
				JOSEPH HSIA	12/27/00

1.0 OBJECTIVE

1.1 This specification defines the performance, test, quality and reliability requirements of the CARD BUS I product.

2.0 SCOPE

This specifies the design and product requirements for a dual stack, or single stack of CARD BUS I header using ejector mechanism or CARD BUS header without ejector mechanism, along with other applicable documents.

3.0 GENERAL

This document is composed of the following sections :

- 1.0 Objective
- 2.0 Scope
- 3.0 General
- 4.0 Applicable Documents
- 5.0 Requirements
 - 5.1 Material
 - 5.2 Finish
 - 5.3 Design and Construction
- 6.0 Performance

4.0 APPLICABLE DOCUMENTS

- 4.1 Specifications
 - 4.1.1 FCI Assembly Drawing.
- 4.2 Military Standards
 - 4.2.1 MIL-STD-202F Test methods for electronic and electrical component parts
 - 4.2.2 MIL-G-45204 Gold Plating (Electrodeposited)
 - 4.2.3 MIL-P-81728 Palladium Plating (Electrodeposited)
 - 4.2.4 MIL-P-81728 Plating, Tin-Lead (Electrodeposited)
- 4.3 Federal Specifications
 - 4.3.1 QQ-N-290 Nickel Plating, (Electrodeposited)
 - 4.3.2 QQ-B-750 Phosphor-Bronze

E-3005 REV 4/7/93

	TYPE	NUMBER	
	PRODUCT SPECIFICATION	PAGE	2 OF 7
TITLE CARD BUS I, EJECTOR HEADER		REV: B	
		DATE	
		12/27/00	
4.4 Other Standards and Specifications			
4.4.1 UL94-V0 Flammability			
4.4.2 PC Card Standard Release March 1997			
4.4.3 JEIDA Release 4			
4.5 FCI Specifications			
4.5.1 FCI product specification, BERGSTAK, <u>110-327</u>			
5.0 REQUIREMENT			
5.1 Material			
5.1.1 Contact and Solder tail Material : Phosphor-Bronze per QQ-B-750			
5.1.2 Housing Material : High temperature thermoplastic meeting UL 94V-0 flammability and resistance to refold soldering heat requirements.			
5.2 Finish			
5.2.1 0.1 μ m (4 μ in) min gold flash over 0.5 μ m(20 μ in) min palladium nickel, over 0.5 μ m (20 μ in) min nickel underplate per QQ-N-290, MIL-P-81728 and MIL-G-45204.			
5.3 Design and Construction			
5.3.1 This connector consists of CARDBUS I double deck, single deck, and 68pos.pin header with one or two vertical transition boards, eject mechanisms and 100pos.receptacles.			
6.0 PERFORMANCE			
6.1 Current Rating : 0.5A D.C MAX. per Contact			
6.2 Temperature Rise : Max 30°C			
6.3 Operating Temperature Range : - 20°C ~ + 60°C			
6.4 Storage Temperature Range : - 40°C ~ +70°C			
Unless otherwise specified, the performance of connectors given in the attached list shall satisfy the values specified in Table 6.5~6.7, under the environmental conditions (JIS C0010) listed below. When 68pos.socket connector to be used for the test, it should meet the requirements of PC Card Standard.			
• Temperature : 15 to 35°C • Relative humidity : 25 to 85% • Atmospheric pressure : 86 to 106 KPa			

	TYPE	NUMBER GS-12-113	
	PRODUCT SPECIFICATION	PAGE	REV: B
		3 OF 7	
TITLE	CARD BUS I , EJECTOR HEADER	AUTHORIZED BY JOSEPH HSIA	DATE 12/27/00

6.5 Electrical characteristics

No.	Item	Requirement	Test Condition	Applicable (*1) classification		
				E	H	R
6.5.1	Contact Resistance (Low level)	After test Contact resistance change from initial value : 20 mΩ MAX.	MIL-STD-1344A Method 3002. 1 Open circuit voltage : 20mV MAX. Test current : 1mA		✓	✓
6.5.2	Insulation Resistance	Initial : 1000 MΩ MIN. After test : 100 MΩ MIN.	MIL-STD-202 Method 302 Apply 250V DC 1min.		✓	✓
6.5.3	Withstanding Voltage	No arc-over or insulation breakdown. Current leakage : 1mA MAX.	MIL-STD-202 Method 301 Apply 125Vrms 1min.		✓	✓

6.6 Mechanical characteristics

No.	Item	Requirement	Test Condition	Applicable (*1) classification		
				E	H	R
6.6.1	Durability (Office environment)	No physical or mechanical damage which affects connector function After test Contact resistance change from initial value : 20 mΩ MAX.	.Suitable PC Card to be used. .10,000 cycles .400-600 cycles per hour .Ejection to be done by eject mechanism	✓	✓	
6.6.2	Durability (Harsh environment)	No physical or mechanical damage which affects connector function After test Contact resistance change from initial value : 20 mΩ MAX.	.Suitable PC Card to be used. .Total 5,000 cycles with Humidity and Hydrogen sulfide .400-600 cycles per hour .Ejection to be done by eject mechanism	✓	✓	



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-113

PAGE

4 OF 7

REV: B

TITLE

CARD BUS I, EJECTOR HEADER

AUTHORIZED BY

JOSEPH HSIA

DATE

12/27/00

6.6.3	Durability (100pos. Receptacle)	After test Contact resistance change from initial value : 20 mΩ MAX.	.Vertical board to be mated/unmated with 100pos. Receptacle .20 cycles			✓
6.6.4	Total unmating force	4 kg MAX.	.Suitable PC Card to be used. .Mating/unmating speed : 25mm/min.		✓	
6.6.5	Total unmating force	0.68 kg MIN. 4 kg MAX.	.Suitable PC Card to be used. .Mating/unmating speed : 25mm/min.		✓	
6.6.6	Vertical board mating force (to receptacle)	9.0 kg MAX.	.Mating/unmating speed : 25mm/min.			✓
6.6.7	Vertical board unmating force (from receptacle)	1.0 kg MIN.	.Mating/unmating speed : 25mm/min.			✓
6.6.8	Vibration	No physical or mechanical damage or disassociation of parts. No discontinuity greater than 100 nanoseconds.	MIL-STD-202 Method 204D Test condition B 15G, 10-2000 Hz		✓	✓
6.6.9	shock	No physical or mechanical damage or disassociation of parts. No discontinuity greater than 100 nanoseconds.	MIL-STD-202 Method 213B 50G, 1 Imsec. Semi-Sine wave		✓	✓

6.7 Environmental Resistance characteristics

No.	Item	Requirement	Test Condition	Applicable (*1) classification		
				E	H	R
6.7.1	Thermal shock	After test .Contact resistance change from initial value : 20 mΩ MAX. .Insulation resistance : 100 mΩ MIN.	.MIL-STD-202 method 107G test condition A . -55°C to +85°C .5 cycles(1 hour/1 cycle) .with connector engaged		✓	✓



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-113

PAGE

5 OF 7

REV: B

TITLE

CARD BUS I, EJECTOR HEADER

AUTHORIZED BY

JOSEPH HSIA

DATE

12/27/00

6.7.2	Moisture Resistance	After test .Contact resistance change from initial value : 20 mΩ MAX. .Insulation resistance : 100 mΩ MIN.	.MIL-STD-202 method 106E .10 cycles(24 hour/1 cycle) .with connector engaged		✓	✓
6.7.3	Humidity (normal condition)	After test .Contact resistance change from initial value : 20 mΩ MAX. .Insulation resistance : 100 mΩ MIN.	.MIL-STD-202 method 103B .40°C .90 to 95%RH .96 hours .With connector engaged		✓	✓
6.7.4	Hydrogen sulfide	After test .Contact resistance change from initial value : 20 mΩ MAX.	.JEIDA 38 .3ppm H ₂ S .Approx. 80%RH .96 hours .With connector engaged		✓	✓
6.7.5	High temperature	After test .Contact resistance change from initial value :20 mΩ MAX.	.MIL-STD-202 method 108A test condition B .+85°C .250 hours .With connector engaged		✓	✓
6.7.6	Cold resistance	After test .Contact resistance change from initial value : 20 mΩ MAX.	.JIS C0020 . -55°C .96 hours .With connector engaged		✓	✓

(*1) E : Eject mechanism

H : 68pos. Pin header

R : 100pos. Receptacle



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-113

TITLE

CARDBUS I , EJECTOR HEADER

PAGE

6 OF 7

REV.



B

AUTHORIZED BY

JOSEPH HSIA

DATE

12/27/00

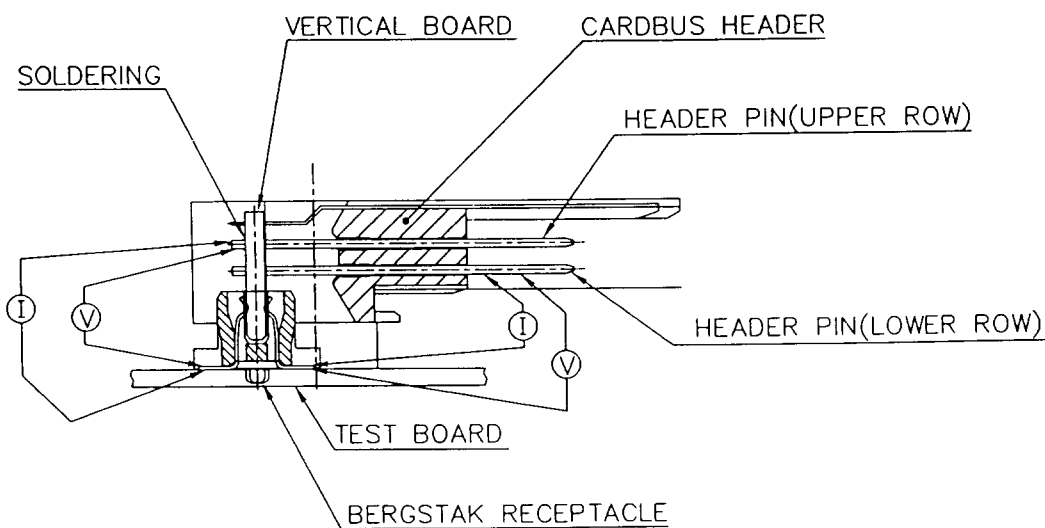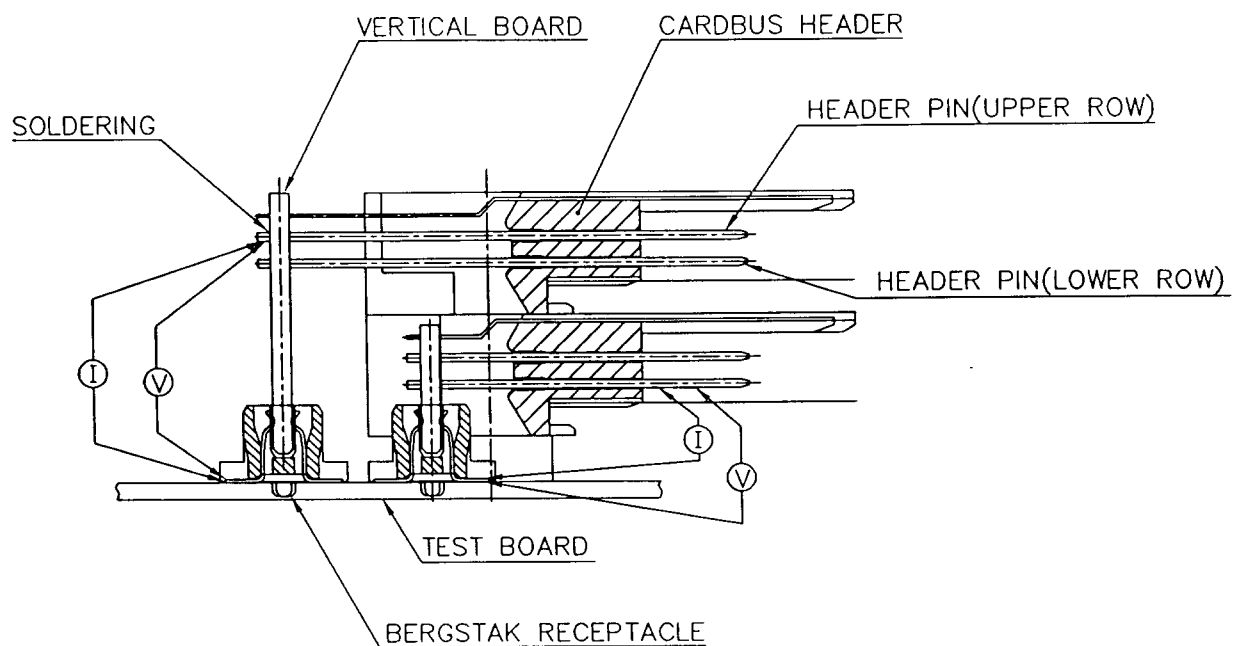

E-3005 REV 4/7/93

NOTE THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF THE BERG ELECTRONICS COMPANY.
NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS.

	TYPE	NUMBER GS-12-113	
	PRODUCT SPECIFICATION	PAGE 7 OF 7	REV: B
TITLE CARD BUS I, EJECTOR HEADER		AUTHORIZED BY JOSEPH HSIA	DATE 12/27/00

<u>REVISION RECORD</u>				
<u>REV.</u>	<u>PAGE</u>	<u>DESCRIPTION</u>	<u>ECR#</u>	<u>DATE</u>
A	ALL	RELEASE	T90094	3/2/99
B	ALL	UPDATE MATING & UNMATING FORCE	T00387	12/27/00

E-3005 REV 4/7/93

NOTE THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF THE BERG ELECTRONICS COMPANY.

NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF BERG ELECTRONICS.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com