

Electrical Characteristics

Nominal Impedance: Non Constant
Frequency Range: DC to 2 GHz
VSWR: 1.35:1 maximum
Insertion Loss: 0.2 dB at 2 GHz
Operating Voltage (rms): 250 V maximum at sea level
Dielectric Withstand Voltage (rms): 1500 V maximum at sea level
Contact Resistance: 3.0 milliohms maximum
Insulation Resistance: 5000 megohms minimum



Mechanical Characteristics

Mating Cycles: 50 cycles (subject to cable)
Interface Dimensions: Conform to MIL-C-39012


Environmental Characteristics

Temperature Range: -65 °C to +165 °C

PART	DESCRIPTION
1	Coupling Nut Zinc, nickel plated 2,54 µm
2	Body Brass, nickel plated 2,54 µm

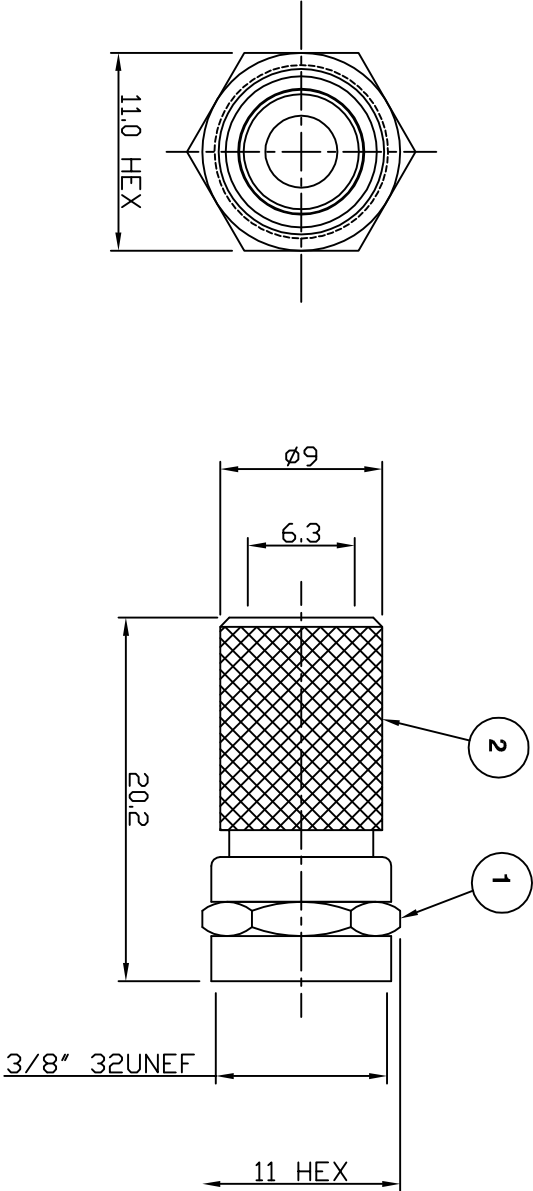

For stripping and assembly instructions see Drawing Number: VAI/F1301



Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE:

S

M Nielsen

P Couzens

14 Nov 01

TITLE:

Twist-on F Plug For
RG6/CT100 Cable Types

PART NUMBER:

TOF56

PAGE: 1 of 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com