


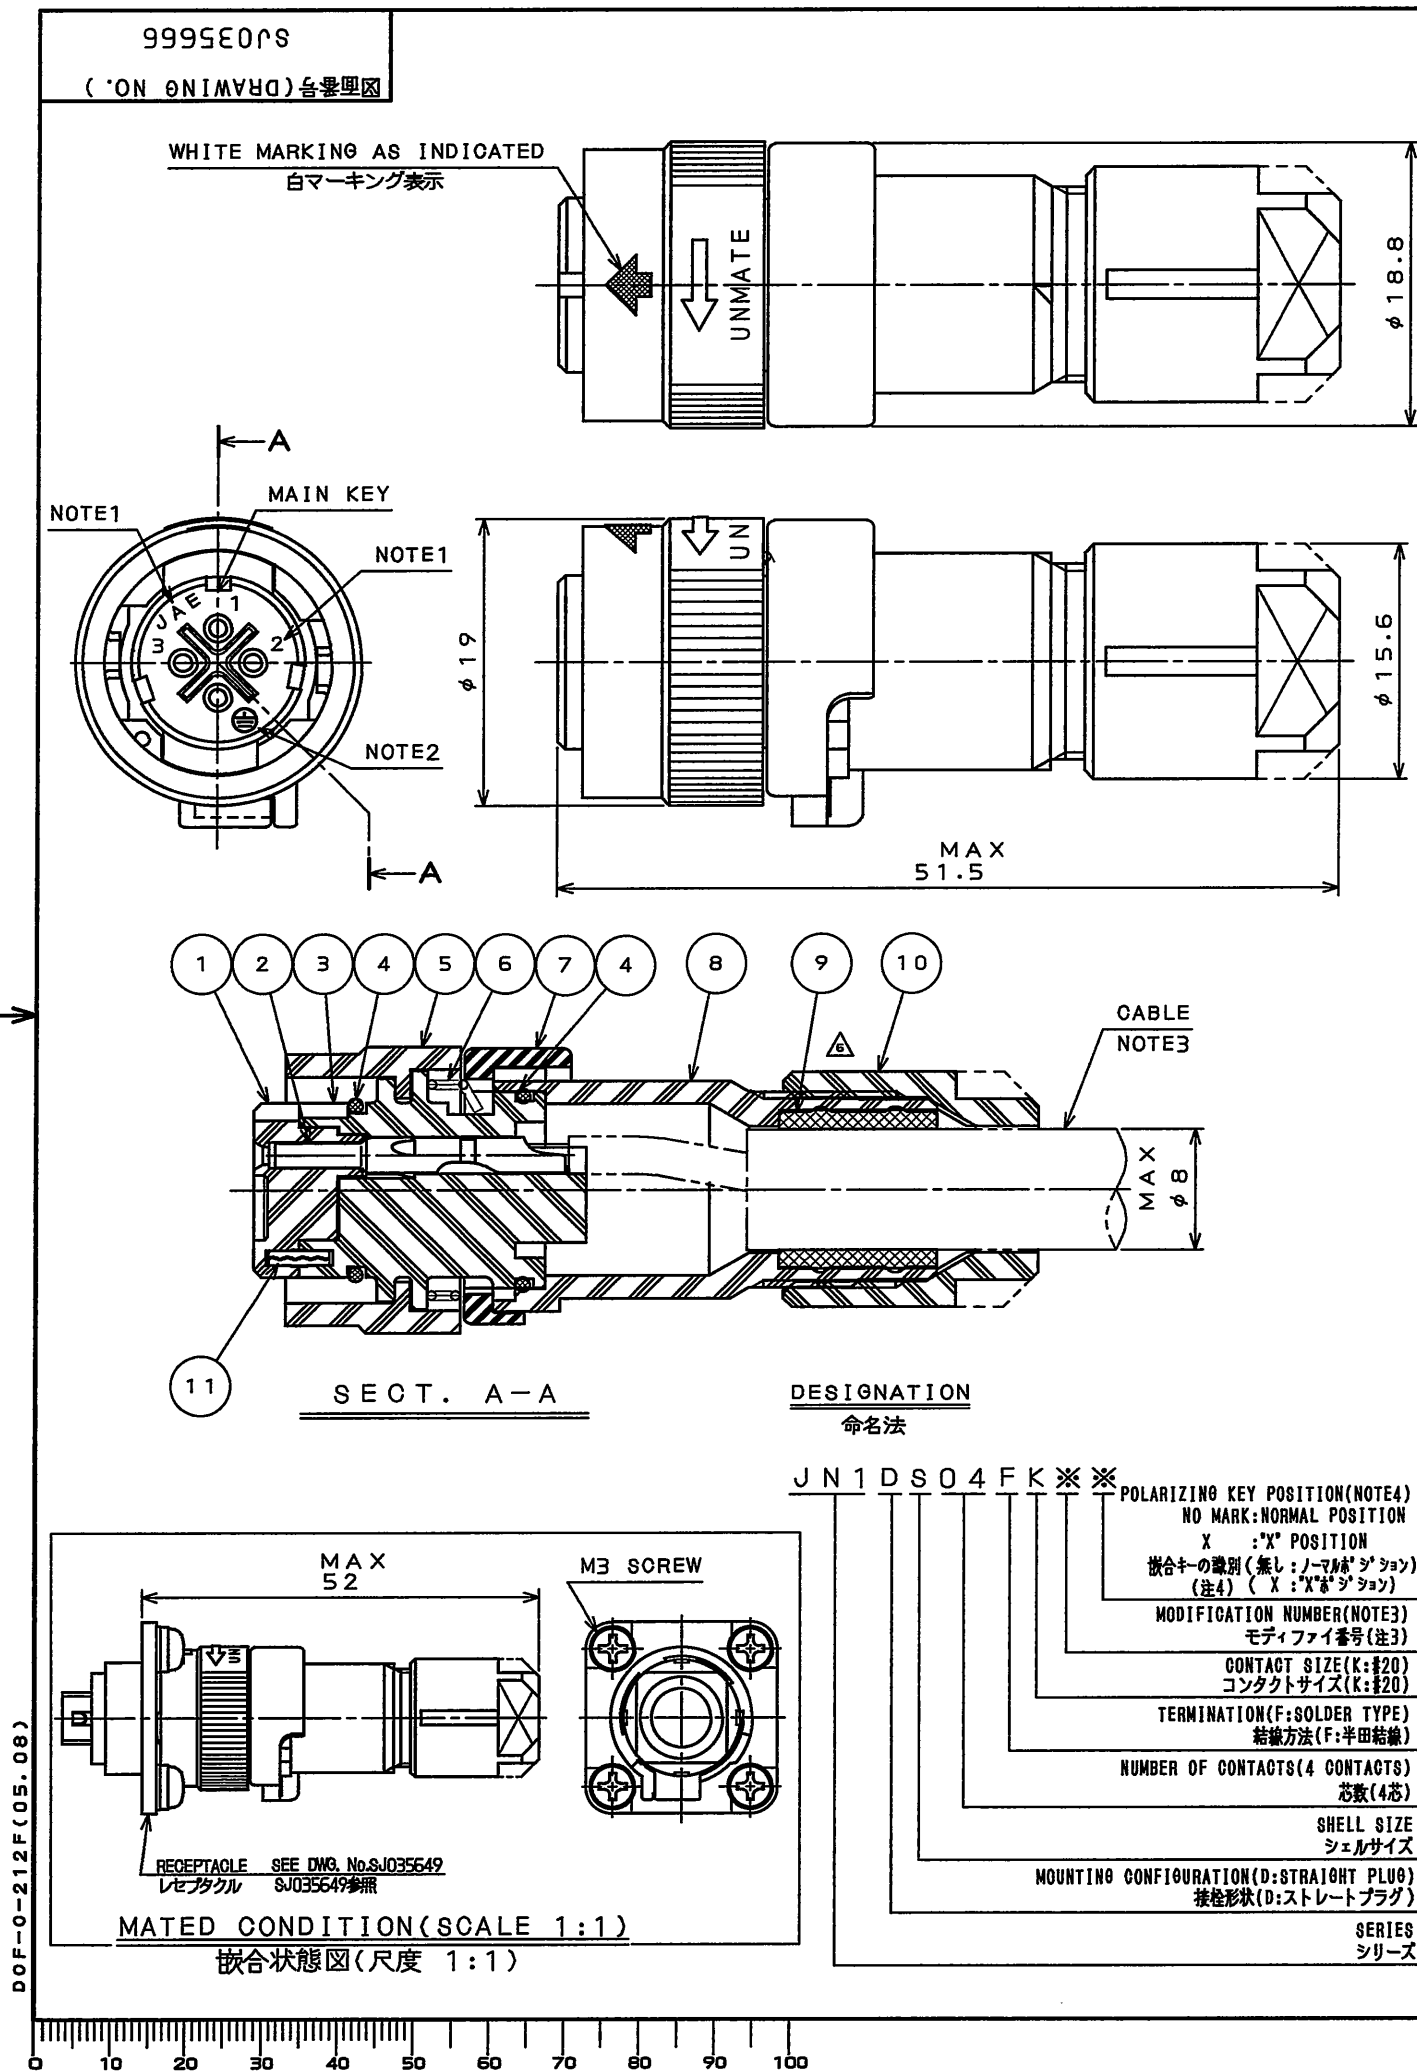

版数 REV.	年月日 DATE	CON NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
5	30.Mar.2007	062675	REVISED NOTE	T.TAKESHITA	T.SUZUKI	E.MATSUMOTO	A.ONOGAWA
6	15.Oct.2009	067605	REVISED FORM		H.NAKAJIMA	T.OKAMURA	E.MATSUMOTO
7	12.Jan.2010	069275	CHANGED RATED VOLTAGE		H.TOYOFUKU	T.OKAMURA	E.MATSUMOTO

NOTE1. CONTACT POSITION NUMBER & COMPANY LOGO "JAE" ARE MARKED AS INDICATED.

2. EARTH MARK(⊕) IS MARKED AS INDICATED.

3. THE APPLICABLE CABLE IS SPECIFIED IN THE PART NUMBER.

PART NUMBER, THE APPLICABLE CABLE DIAMETER AND THE COLOR OF BUSHING ARE LISTED IN THE TABLE-1.

4. THE LOCATION OF KEY IS DIFFERENT BETWEEN NORMAL POSITION AND "X" POSITION TO PREVENT MISMATING.
PART NUMBER OF "X" POSITION CONNECTOR HAS THE SUFFIX "X" FOR THE POLARIZATION.

注1. 図示の位置に端子番号及び社名を表示する。

2. 図示の位置にアースマーク(⊕)を表示する。

3. 本製品は、品名により適用ケーブル(ブッシング)部品)が異なる。
品名、適用ケーブル径及び色相は表-1による。

4. ノーマルポジションと"X"ポジションはキーの位置が異なり、誤嵌合を防止する。
"X"ポジションは誤嵌合防止として、品名の末尾に"X"が付く。

TABLE-1【APPLICABLE WIRE DIM.】

PART NUMBER	APPLICABLE WIRE DIM.	BUSHING COLOR
JN1DS04FK 1	φ5.7~7.3	BLACK
JN1DS04FK 2	φ6.5~8.0	GRAY
JN1DS04FK 3	φ3.5~5.0	BRICK


△

SPECIFICATION

NUMBER OF CONTACTS	: 4X#20	
RATED VOLTAGE	: 400VAC	POLLUTION DEGREE/2, OVER VOLTAGE CATEGORY/Ⅲ
RATED CURRENT	: 5A MAX. per CONTACT	
DIELECTRIC WITHSTANDING VOLTAGE	: 2000VAC	
INSULATION RESISTANCE	: 1000MΩMIN. (AT 500VDC)	
APPLICABLE CABLE	: 1.25mm MAX (φ2.7MAX)	
SUBMERSIBLE PROPERTY	: IP67 (MATED)	

仕様

コンタクト : #20コンタクト 4本
定格電圧 △: 400VAC (汚染度: 2/過電圧範囲: Ⅲ)
定格電流 : 5A以下/1芯
耐電圧 : 2000VAC
絶縁抵抗 : 1000MΩ以上 (500VDCにて)
適用ケーブル : 1.25mm以下 (被覆外径φ2.7以下)
防水性能 : IP67 (嵌合時)

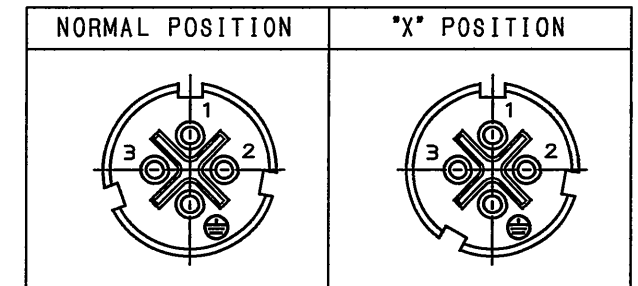

POLARIZING KEY POSITION
(NOTE4)

1 1	SPRING PIN	2	STAINLESS STEEL		
1 0	GLAND NUT	1	SYNTHETIC RESIN		COLOR:BLACK
9	BUSHING	1	SYNTHETIC RUBBER		NOTE3
8	STRAIGHT ENDBELL	1	SYNTHETIC RESIN		COLOR:BLACK
7	ASSEMBLY NUT	1	SYNTHETIC RESIN		COLOR:BLACK
6	SPRING	1	STAINLESS STEEL		
5	COUPLING NUT	1	SYNTHETIC RESIN		COLOR:BLACK
4	"O" RING	2	SYNTHETIC RUBBER		COLOR:BLACK
3	REAR INSULATOR	1	SYNTHETIC RESIN		COLOR:BLACK
2	SOCKET CONTACT	4	COPPER ALLOY	SILVER PLATING	
1	FRONT INSULATOR	1	SYNTHETIC RESIN		COLOR:BLACK
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION)					
JACS-5111-2 JABL-5111		第1版 (ORIGINAL DATE) 1.Mar.2001		尺度 (SCALE) 2: 1	シリーズ (SERIES) JN1
公差 (GENERAL TOLERANCE)		製図 DR.	H.SAKURADA	名称 (TITLE) JN1DS04FK** (STRAIGHT PLUG) (ストレートプラグ)	
寸法 (DIMENSION)		担当 CHK.	E.MATSUMOTO T.SHIMOYAMA		
角度 (ANGLES)		査閲 APPD.	S.NANAO		
. ±0.8 .X ±0.4 .XX ±0.1 .XXX ±		承認 APPD.	M.MAJIME		
		質量 (MASS) 7.7g			
日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.					
図面番号 (DRAWING NO.) SJ035666					
版数 (REV.) 7					

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com