
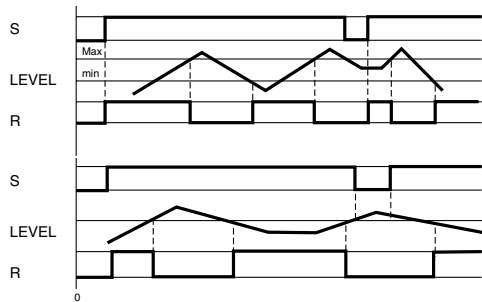


NRU SERIES

LIQUID LEVEL CONTROL PUMP UP

UL listed CSA recognized

- **LED Relay Indicator**
- **Three Styles**
- **Pump Up Control**
- **4.7 k Ω to 100 k Ω Sensitivity**
- **10 Amp SPDT Relay**

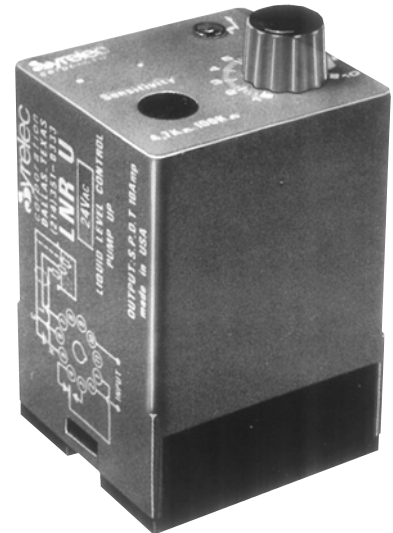

Control of conductive liquids (tap water, sea water, sewage, chemical solutions, coffee, ice cream, etc.)

The relay is energized when the level falls below the low level probe. It de-energizes when the high level probe is reached. The NRU will also control a single level. In this case, a single probe is used and the relay operates when the probe is not immersed. The Max terminal is connected to common with a jumper.


In either case, a common electrode is needed if the container is non-conductive.

SPECIFICATIONS:

Input Power	.24, 48, 110, 220 VAC, $\pm 15\%$ (50/60 Hz)	
Maximum voltage	.24 VAC: 1.5 VA	
	48 VAC: 1.7 VA	
	110 VAC: 2 VA	
	220 VAC: 2 VA	
Output	SPDT Relay	
Contact material	AgCdO	
Maximum loading	10A AC resistive	8A DC resistive
Maximum switching voltage	.250 VAC	250 VDC
Maximum power rating	.2500 VA	80 W
Electrical life	2×10^5 at 2200 VA resistive load	
Mechanical life	3×10^7 operations	
Probe isolation	Electrodes: 2000 VAC	
Probe sensitivity	4.7 K to 100 K ohms	
Probe voltage	.24 VAC, 60 Hz	
Probe current	.2 mA max.	
Operating temperature	+14°F to +140°F	-10°C to +60°C
Weight	.7 oz. (200g)	

Note: The cable for probes (max 300ft) should be run in separate conduit. A shielded cable is recommended.

WIRING DIAGRAM:

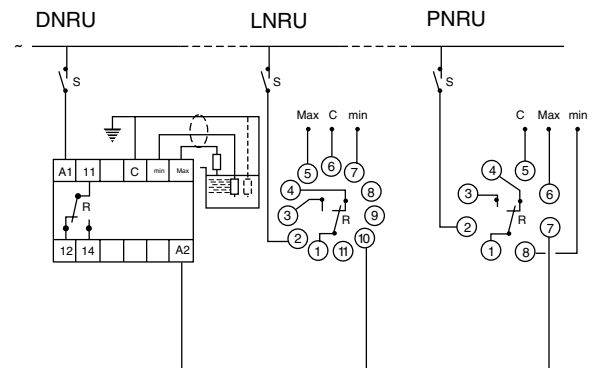

ORDERING INFORMATION:

MOUNTING

P
MOUNTING

D = DIN-rail mounting
L = 11 pin plug-in
P = 8 pin plug-in

NRU
SERIES

SERIES
NRU

220D
INPUT POWER


INPUT POWER

24A = 24VAC
48A = 48VAC
110A = 110VAC
220A = 220VAC


Products and specifications subject to change without notice.
 Consult factory for application assistance.

DIMENSIONS:

D - DIN-Rail

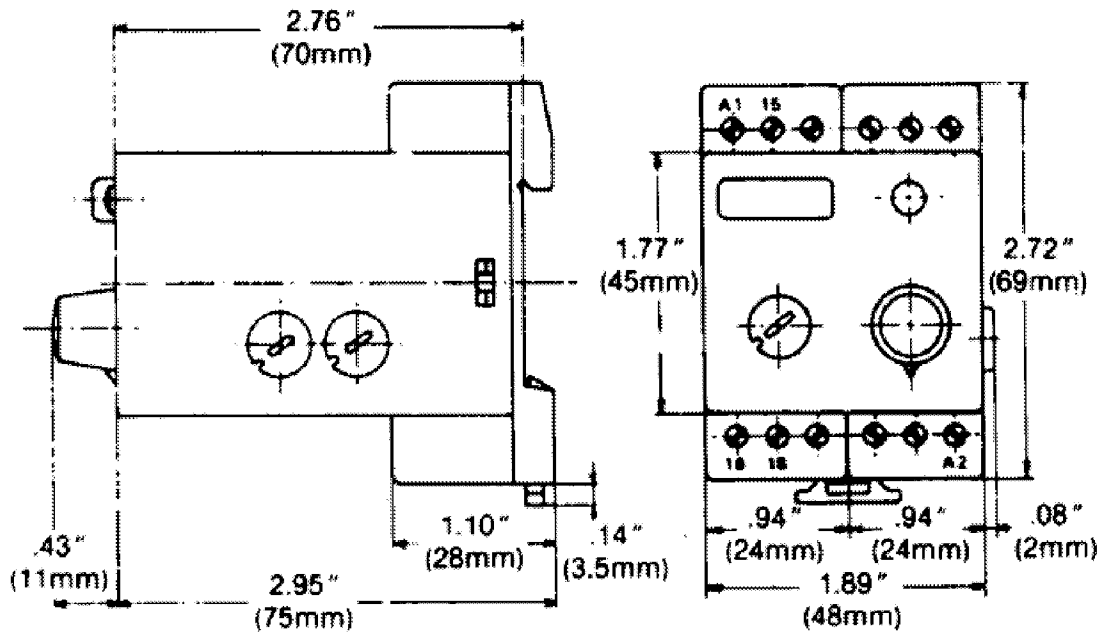

L & P - Sockets

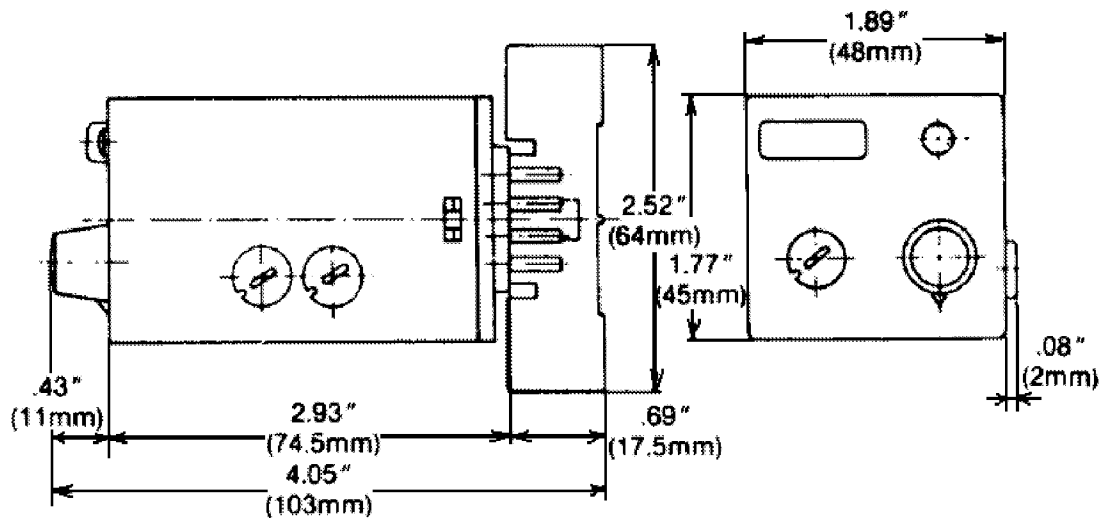

Products and specifications subject to change without notice.
Consult factory for application assistance.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com