


# IGBT

**IXGA 8N100**  
**IXGP 8N100**


$$\begin{aligned} V_{CES} &= 1000 \text{ V} \\ I_{C25} &= 16 \text{ A} \\ V_{CE(sat)} &= 2.7 \text{ V} \end{aligned}$$

Preliminary data sheet




| Symbol                                                                          | Test Conditions                                                                                 | Maximum Ratings                      |                  |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------|------------------|
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                  | 1000                                 | V                |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 1 \text{ M}\Omega$                      | 1000                                 | V                |
| $V_{GES}$                                                                       | Continuous                                                                                      | $\pm 20$                             | V                |
| $V_{GEM}$                                                                       | Transient                                                                                       | $\pm 30$                             | V                |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                        | 16                                   | A                |
| $I_{C90}$                                                                       | $T_C = 90^\circ\text{C}$                                                                        | 8                                    | A                |
| $I_{CM}$                                                                        | $T_C = 25^\circ\text{C}, 1 \text{ ms}$                                                          | 32                                   | A                |
| <b>SSOA</b><br><b>(RBSOA)</b>                                                   | $V_{GE} = 15 \text{ V}, T_{VJ} = 125^\circ\text{C}, R_G = 120 \Omega$<br>Clamped inductive load | $I_{CM} = 16$<br>@ $0.8 V_{CES}$     | A                |
| $P_C$                                                                           | $T_C = 25^\circ\text{C}$                                                                        | 54                                   | W                |
| $T_J$                                                                           |                                                                                                 | -55 ... +150                         | $^\circ\text{C}$ |
| $T_{JM}$                                                                        |                                                                                                 | 150                                  | $^\circ\text{C}$ |
| $T_{stg}$                                                                       |                                                                                                 | -55 ... +150                         | $^\circ\text{C}$ |
| Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                 | 300                                  | $^\circ\text{C}$ |
| $M_d$                                                                           | Mounting torque with screw M3<br>Mounting torque with screw M3.5                                | 0.45/4 Nm/lb.in.<br>0.55/5 Nm/lb.in. |                  |
| <b>Weight</b>                                                                   | TO-220                                                                                          | 4                                    | g                |
|                                                                                 | TO-263                                                                                          | 2                                    | g                |

**TO-220AB (IXGP)**



**TO-263 AA (IXGA)**



## Features

- International standard packages  
JEDEC TO-220AB and TO-263AA
- Low  $V_{CE(sat)}$   
- for minimum on-state conduction losses
- MOS Gate turn-on  
- drive simplicity

## Applications


- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies
- Capacitor discharge

## Advantages

- Easy to mount with one screw
- Reduces assembly time and cost
- High power density


| Symbol        | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) | Characteristic Values     |      |                      |
|---------------|-----------------------------------------------------------------------------|---------------------------|------|----------------------|
|               |                                                                             | Min.                      | Typ. | Max.                 |
| $BV_{CES}$    | $I_C = 1 \text{ mA}, V_{GE} = 0 \text{ V}$                                  | 1000                      |      | V                    |
| $V_{GE(th)}$  | $I_C = 250 \mu\text{A}, V_{CE} = V_{GE}$                                    | 2.5                       |      | 5.0 V                |
| $I_{CES}$     | $V_{CE} = 0.8 V_{CES}$                                                      | $T_J = 25^\circ\text{C}$  |      | 25 $\mu\text{A}$     |
|               | $V_{GE} = 0 \text{ V}$                                                      | $T_J = 125^\circ\text{C}$ |      | 250 $\mu\text{A}$    |
| $I_{GES}$     | $V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$                           |                           |      | $\pm 100 \text{ nA}$ |
| $V_{CE(sat)}$ | $I_C = I_{CE90}, V_{GE} = 15 \text{ V}$                                     |                           | 2.2  | 2.7 V                |

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified)                                                                                                                                                                                                               | Characteristic Values |      |         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|---------|
|              |                                                                                                                                                                                                                                                                                           | Min.                  | Typ. | Max.    |
| $g_{fs}$     | $I_C = I_{C90}$ , $V_{CE} = 10\text{ V}$<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $\leq 2\%$                                                                                                                                                                                 | 4                     | 7.6  | S       |
| $I_{C(on)}$  | $V_{GE} = 10\text{ V}$ , $V_{CE} = 10\text{ V}$                                                                                                                                                                                                                                           |                       | 40   | A       |
| $C_{ies}$    | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$                                                                                                                                                                                                                       |                       | 595  | pF      |
| $C_{oes}$    |                                                                                                                                                                                                                                                                                           |                       | 34   | pF      |
| $C_{res}$    |                                                                                                                                                                                                                                                                                           |                       | 10   | pF      |
| $Q_g$        | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $V_{CE} = 0.5\text{ V}_{CES}$                                                                                                                                                                                                                  |                       | 26.5 | nC      |
| $Q_{ge}$     |                                                                                                                                                                                                                                                                                           |                       | 4.8  | nC      |
| $Q_{gc}$     |                                                                                                                                                                                                                                                                                           |                       | 8.5  | nC      |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b><br>$I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$<br>$V_{CE} = 800\text{ V}$ , $R_G = R_{off} = 120\ \Omega$<br>Remarks: Switching times may increase for $V_{CE}$ (Clamp) $> 0.8\text{ V}_{CES}$ , higher $T_J$ or increased $R_G$  |                       | 15   | ns      |
| $t_{ri}$     |                                                                                                                                                                                                                                                                                           |                       | 30   | ns      |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                                           |                       | 600  | 1000 ns |
| $t_{fi}$     |                                                                                                                                                                                                                                                                                           |                       | 390  | 900 ns  |
| $E_{off}$    |                                                                                                                                                                                                                                                                                           |                       | 2.3  | 5.0 mJ  |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b><br>$I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$<br>$V_{CE} = 800\text{ V}$ , $R_G = R_{off} = 120\ \Omega$<br>Remarks: Switching times may increase for $V_{CE}$ (Clamp) $> 0.8\text{ V}_{CES}$ , higher $T_J$ or increased $R_G$ |                       | 15   | ns      |
| $t_{ri}$     |                                                                                                                                                                                                                                                                                           |                       | 30   | ns      |
| $E_{on}$     |                                                                                                                                                                                                                                                                                           |                       | 0.5  | mJ      |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                                           |                       | 800  | ns      |
| $t_{fi}$     |                                                                                                                                                                                                                                                                                           |                       | 630  | ns      |
| $E_{off}$    |                                                                                                                                                                                                                                                                                           |                       | 3.7  | mJ      |
| $R_{thJC}$   | TO-220                                                                                                                                                                                                                                                                                    |                       |      | 2.3 K/W |
| $R_{thCK}$   |                                                                                                                                                                                                                                                                                           |                       |      | 0.5 K/W |

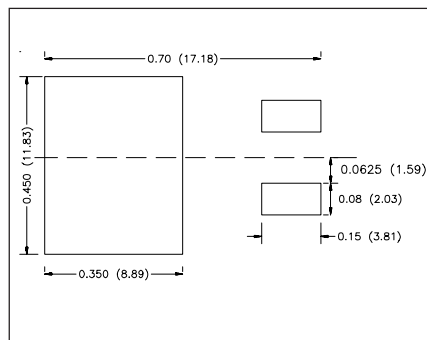

**Min. Recommended Footprint**  
(Dimensions in inches and mm)

### TO-220 AB Dimensions

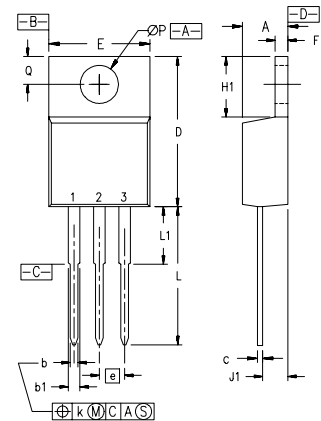


Pins: 1 - Gate  
2 - Collector  
3 - Emitter  
4 - Collector  
Bottom Side

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .170     | .190 | 4.32        | 4.83  |
| b   | .025     | .040 | 0.64        | 1.02  |
| b1  | .045     | .065 | 1.15        | 1.65  |
| c   | .014     | .022 | 0.35        | 0.56  |
| D   | .580     | .630 | 14.73       | 16.00 |
| E   | .390     | .420 | 9.91        | 10.66 |
| e   | .100 BSC |      | 2.54 BSC    |       |
| F   | .045     | .055 | 1.14        | 1.40  |
| H1  | .230     | .270 | 5.85        | 6.85  |
| J1  | .090     | .110 | 2.29        | 2.79  |
| k   | 0        | .015 | 0           | 0.38  |
| L   | .500     | .550 | 12.70       | 13.97 |
| L1  | .110     | .230 | 2.79        | 5.84  |
| ØP  | .139     | .161 | 3.53        | 4.08  |
| Q   | .100     | .125 | 2.54        | 3.18  |

NOTE: This drawing will meet all dimensions requirement of JEDEC outline TO-220 AB.

### TO-263 AA Outline

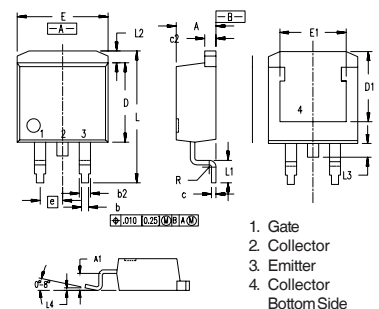


| Dim. | Millimeter |       | Inches |      |
|------|------------|-------|--------|------|
|      | Min.       | Max.  | Min.   | Max. |
| A    | 4.06       | 4.83  | .160   | .190 |
| A1   | 2.03       | 2.79  | .080   | .110 |
| b    | 0.51       | 0.99  | .020   | .039 |
| b2   | 1.14       | 1.40  | .045   | .055 |
| c    | 0.46       | 0.74  | .018   | .029 |
| c2   | 1.14       | 1.40  | .045   | .055 |
| D    | 8.64       | 9.65  | .340   | .380 |
| D1   | 7.11       | 8.13  | .280   | .320 |
| E    | 9.65       | 10.29 | .380   | .405 |
| E1   | 6.86       | 8.13  | .270   | .320 |
| e    | 2.54       | BSC   | .100   | BSC  |
| L    | 14.61      | 15.88 | .575   | .625 |
| L1   | 2.29       | 2.79  | .090   | .110 |
| L2   | 1.02       | 1.40  | .040   | .055 |
| L3   | 1.27       | 1.78  | .050   | .070 |
| L4   | 0          | 0.38  | 0      | .015 |
| R    | 0.46       | 0.74  | .018   | .029 |

IXYS reserves the right to change limits, test conditions, and dimensions.


IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1  
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343 6,583,505


**Fig. 1. Output Characteristics**  
**@ 25 Deg. C**

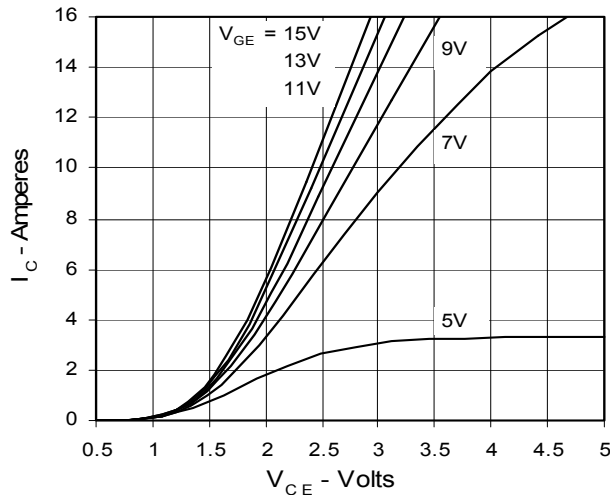


**Fig. 2. Extended Output Characteristics**  
**@ 25 deg. C**

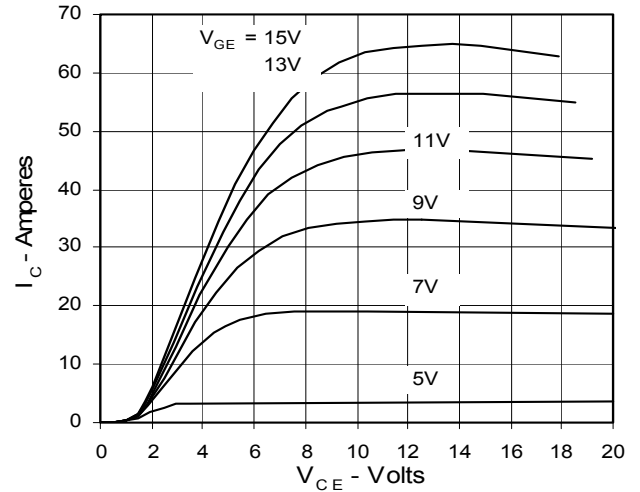


**Fig. 3. Output Characteristics**  
**@ 125 Deg. C**

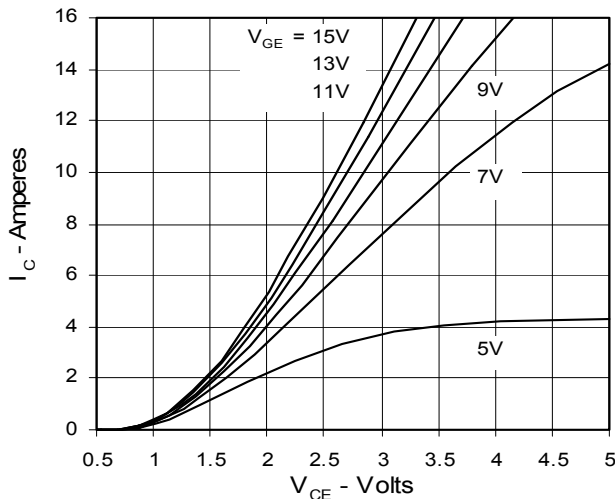


**Fig. 4. Dependence of  $V_{CE(sat)}$  on Temperature**

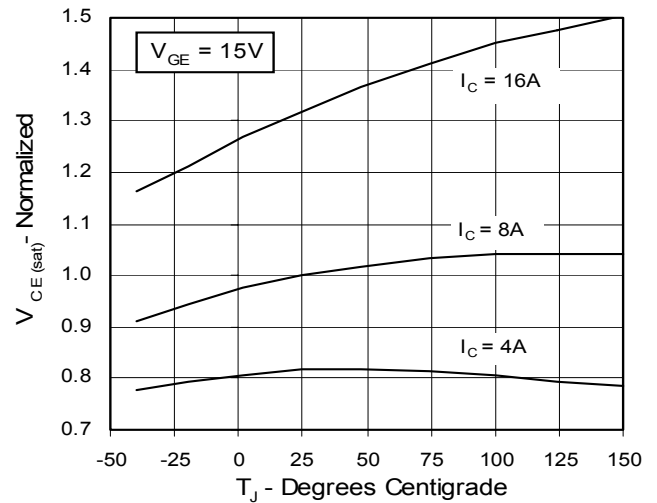


**Fig. 5. Collector-to-Emitter Voltage**  
**vs. Gate-to-Emitter voltage**

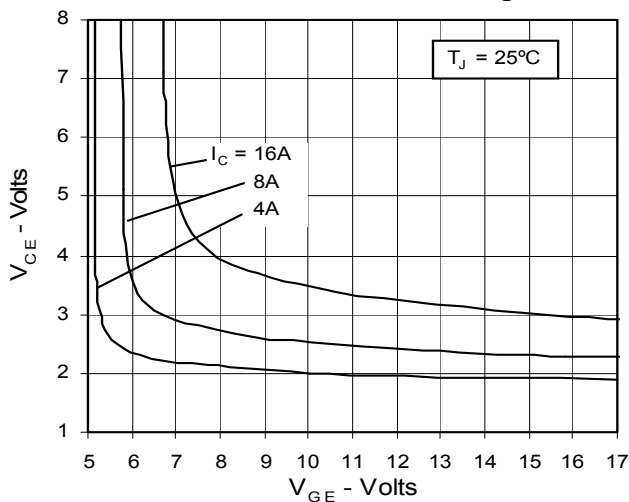


**Fig. 6. Input Admittance**

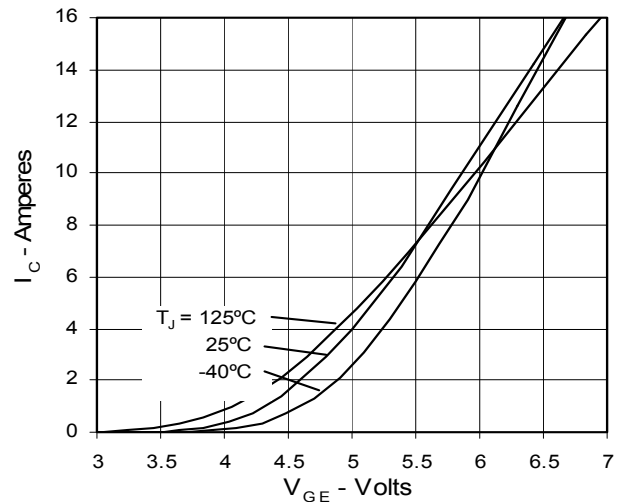


### Fig. 7. Transconductance

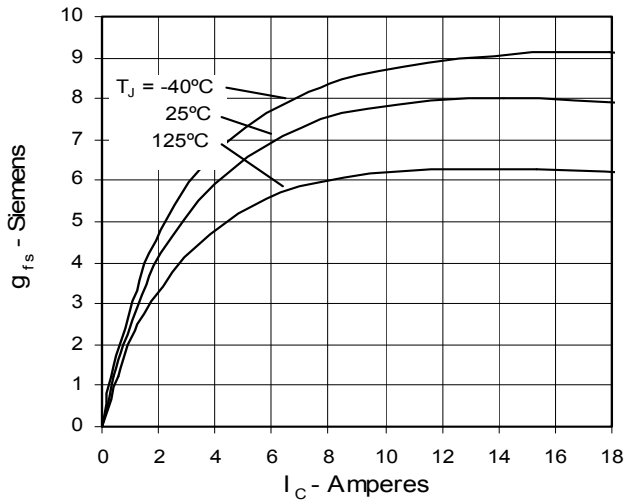


### Fig. 8. Gate Charge

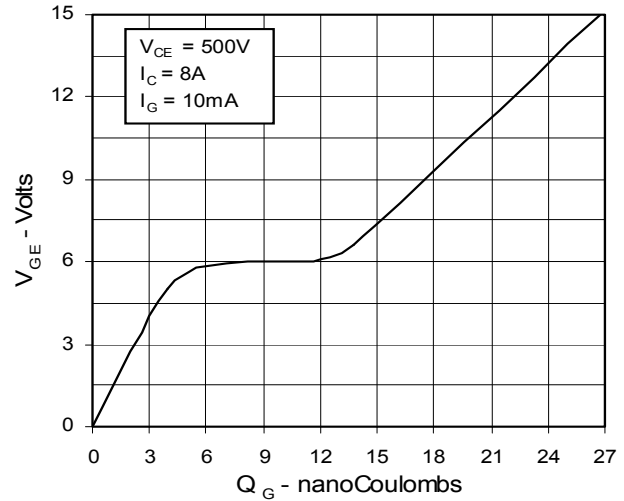

### Fig. 9. Capacitance

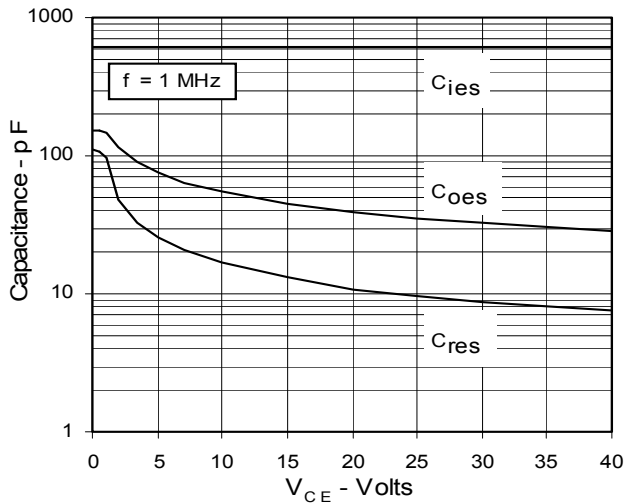

**Fig. 10. Maximum Transient Thermal Resistance**

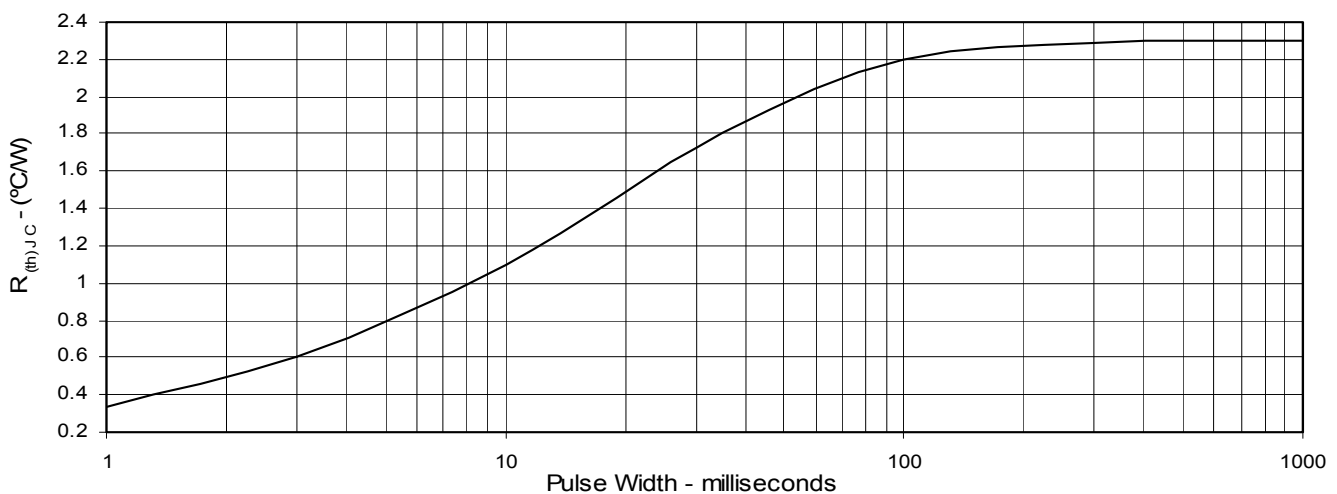

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |           |           |             |             |             |           |
|-----------|-----------|-----------|-----------|-----------|-----------|-------------|-------------|-------------|-----------|
| 4,835,592 | 4,881,106 | 5,017,508 | 5,049,961 | 5,187,117 | 5,486,715 | 6,306,728B1 | 6,259,123B1 | 6,306,728B1 |           |
| 4,850,072 | 4,931,844 | 5,034,796 | 5,063,307 | 5,237,481 | 5,381,025 | 6,404,065B1 | 6,162,665   | 6,534,343   | 6,583,505 |

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)