

SERIES 67A Hall Effect Joystick

FEATURES


- Proportional output
- Shaft and panel seal to IP67
- Compact: 1-inch square flange
- Long operational life
- RoHS compliant

APPLICATIONS

- Medical
- Military vehicles and devices
- Mobile electronics for outdoor use




DIMENSIONS in inches (and millimeters)

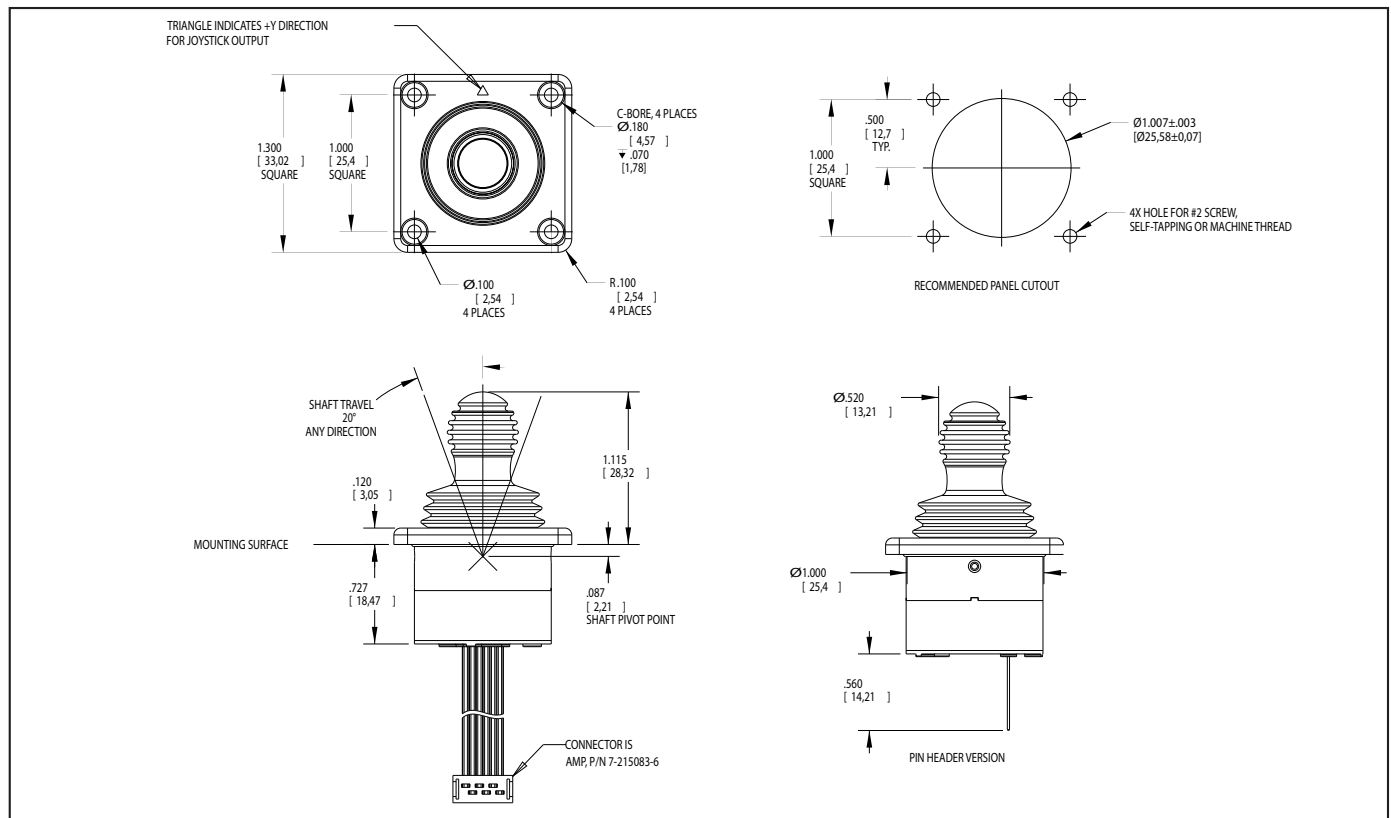


JOYSTICK OPERATIONAL LIMITS

TRIANGLE MARKING ON MOUNTING BRACKET INDICATES +Y DIRECTION FOR JOYSTICK OUTPUT



JOYSTICK OUTPUT WAVEFORM

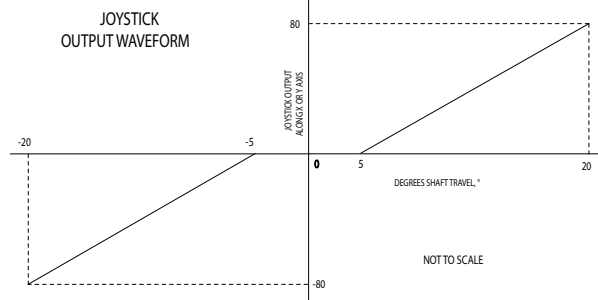

SPECIFICATIONS

Electrical Ratings

Supply Voltage (VDD): 3.3V $\pm$.0.3V
High Level Input Voltage (VIH, Min):
 0.7*VDD on SCL & SDA / 0.25*VDD+0.8 on
 AIn
Low Level Input Voltage (VIL, Max):
 0.3*VDD on SCL & SDA / 0.15*VDD on AIn
Current Draw In Active Mode (IDD1): 3mA
 Maximum @ VDD = 3.3V
Current Draw In Sleep Mode (IDD2): 100uA
 Maximum @ VDD = 3.3V
Maximum Current Sunk By Any I/O Pin:
 25mA
Leakage Current: $\pm$ 5 nA Typ., $\pm$ 125 nA Max
Low Level Output Voltage (VOL): 0.6V On
 INTn & SDA @ IOL = 6mA, @ VDD = 3.3V
Measurement Frequency (Active Mode): 50
 Samples/Sec
Response Time, Active Mode (T1): 20ms*
Response Time, Sleep Mode (T2): 80ms*
Output @ Maximum Joystick Deflection
 (XMax, YMax): 80 Units
Output With Joystick Shaft Released (Center
Position): (0,0)
Nominal Startup Time (TP, W): 300ms, Max

Physical & Mechanical Ratings

Vibration: Random, Tested per MIL-STD-810G,
 Method 514.6, Procedure I
Mechanical Shock: Tested per MIL-STD 202,
 Method 213B Test Condition A
Transit Drop: Tested per MIL-STD-810G, Method
 516.6, Procedure II
Terminal Strength: 10 lbs. Minimum, Tested
 per MIL-STD-202, Method 211A
Push-Out Force: 60 lbs. Minimum
Pull-Out Force: 60 lbs. Minimum
Shaft Impact: 0.5 lbs. Weight dropped 20x
 from height of 1m
Shaft Side-Load: 45 lbs. Minimum
Mounting Torque: 3-5 in-lbs recommended, 8
 in-lbs. Maximum
Joystick Actuation Force: 300g Peak $\pm$ 25%
Joystick Life: 1 million cycles minimum**

Environmental Ratings

Seal: IP67, Tested per IEC 60529
Altitude: Tested per MIL-STD 202,
 Method 105C
Thermal Shock: Tested per MIL-STD 202,
 Method 107G
Operating High Temperature: +85°C,
 Tested per IEC 68-2-14, Test Na
Operating Low Temperature: -40°C,
 Tested per IEC 68-2-14, Test Na

Storage High Temperature: +100°C,

Tested per IEC 68-2-2, Method Ba

Storage Low Temperature: -55°C,

Tested per IEC 68-2-1, Method Aa

Humidity: Tested per MIL-STD 202,

Method 103B

Humidity, 85/85: Tested per MIL-STD 202,

Method 103B, 500 hours

Solar Radiation: Tested per MIL-STD 810G,

Method 505.5, Procedure II

Chemical Resistance: Tested per

ISO 16750-5

Dielectric: Tested per MIL-STD 202G,

Method 301

Insulation Resistance: Tested per MIL-STD

202G, Method 302

EMC Ratings

Radiated Immunity:

Tested per IEC 61000-4-3

Conducted Immunity:

Tested per IEC 61000-4-6

Radiated Emissions: Tested per ANSI C63.4

Conducted Emissions:

Tested per EN 55022

Electrostatic Discharge:


Tested per IEC 61000-4-2

Power Frequency Magnetic Field:

Tested per IEC 61000-4-8




Block Diagram

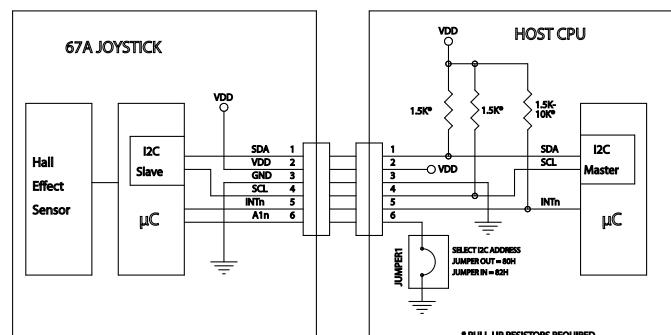

*Response time is the time from joystick movement to when new X,Y position data is available.

**One cycle is defined as a complete revolution of the shaft around the fixed perimeter, or one actuation in each of the 4 main directions, with return to center between each actuation.

ORDERING INFORMATION

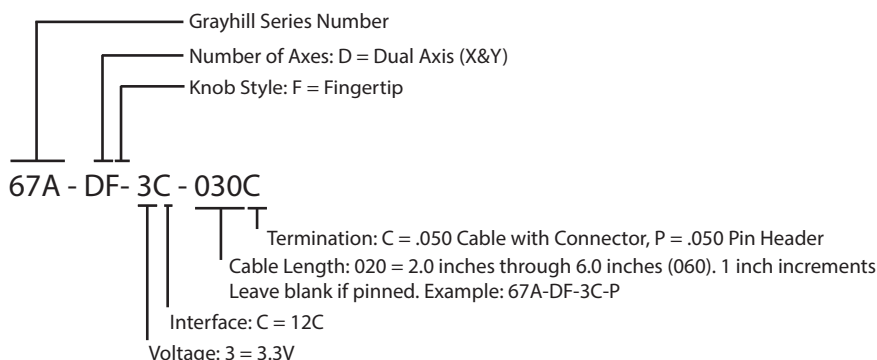

For prices and custom configurations, contact a local sales office, an authorized distributor, or Grayhill's sales department.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com