


USB 3.0 - ESD & Overcurrent Protection

Solution Products



MF-NSMF200-2



CDDFN10-0506N

Objective

Universal Serial Bus (USB) 3.0 ports provide up to 5 Gbps data transfer rates and 5 V power at up to 900 mA. As a hot-pluggable interface, it typically requires protection against ESD and short circuits. This solution provides this protection.

Solution

- 1 Multifuse® PPTC Resettable Fuse: MF-NSMF200-2
- 1 TVS Diode Array: CDDFN10-0506N

Compliance

- USB 3.0
- UL60950
- IEC 61000-4-2 Level 4 (8 kV / 15 kV)

Alternate Recommendations

Other PortNote® Solutions:

- USB: USB 2.0 - ESD & Overcurrent Protection


Benefit

This solution provides USB 3.0 ports with protection against ESD and short circuits without impairing the transmission of power or data.

Design Kit



PN-DESIGNKIT-32

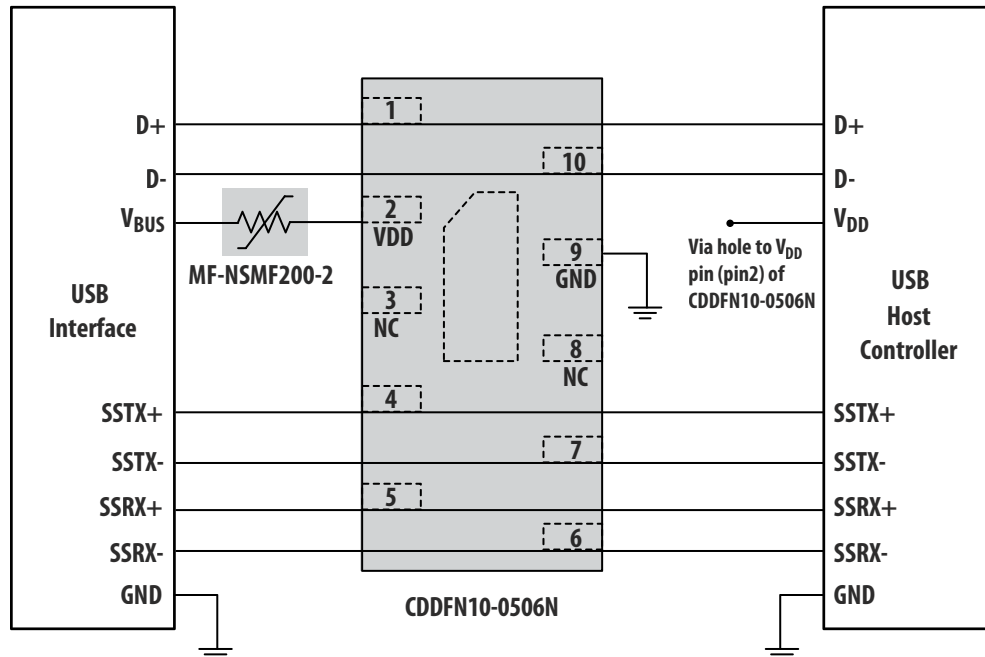

The schematic above illustrates the application protection and does not constitute the complete circuit design. Customers should verify actual device performance in their specific applications.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com