


SPECIFICATIONS		
SILIKROME®	GRADE	
	COMMERCIAL	MILITARY
Material	Silicone Rubber ASTM D 1418	Silicone Rubber conforming to A-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

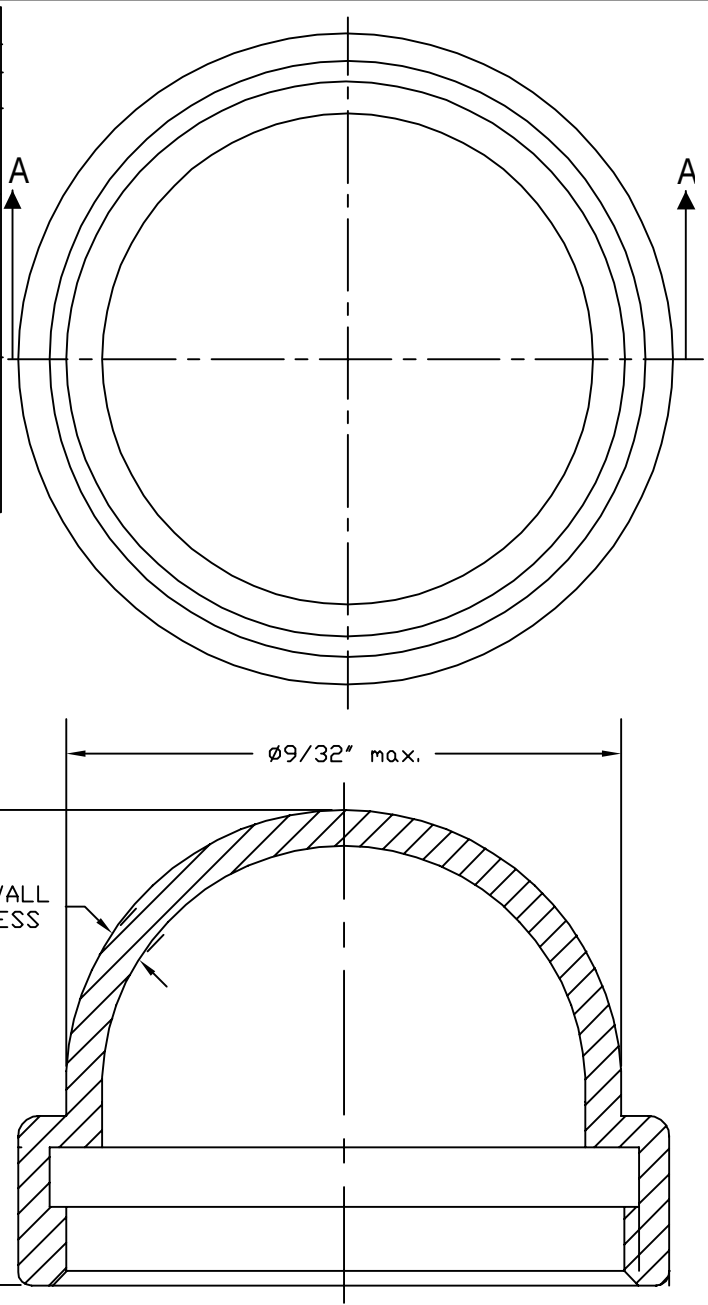

UNLESS OTHERWISE
SPECIFIED, TOLERANCES
ARE ±.010 FOR DECIMALS

SECTION AA

C	REDRAWN and MAT'L CHANGED				S. GOK	05.28.09
B	CAD COMPUTER GENERATED					01.10.03
A	CHANGE DIMENSIONS TO DECIMALS				NKS	01.05.67
REV.	DESCRIPTION					DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE:	SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-1 3/4 LAMPS	ENG.	S. GOK	05.28.09	
			DWN.	ED	09.26.62	
			CHKD.	J. CELLA	05.28.09	
MAT'L: SEE ABOVE		APM-HEXSEAL CORPORATION	SCALE	DWG. NO.	1813/1	
COLOR: SPECIFY			10 : 1			

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com