

Model 8140 Series

7/8" Diameter

10 Turn* Hybrid

Precision Potentiometer / Position Sensor



MODEL STYLES AVAILABLE

8141	1/8" Shaft, 1/4" Bushing
8143	1/8" Shaft, Servo
8144	6 mm Shaft, 3/8" Bushing
8146	1/4" Shaft, 3/8" Bushing
8148 (for heavy side load applications)	1/4" Shaft, 3/8" Bushing

ELECTRICAL¹

Resistance Range	1K to 100K ohms
Standard Resistance Tolerance	±10%
Minimum Practical Resistance Tolerance	±10%
Independent Linearity ²	±0.25%
Minimum Practical Independent Linearity	±0.15%
Power Rating	2.0 Watts at 70°C, derating to 0 at 125°C
Dielectric Strength	1,000 V rms
Insulation Resistance	1,000 Megohms minimum
Output Smoothness	0.05% maximum ≤ 5 Kohms, 0.03% maximum above 5 Kohms
Actual Electrical Travel	3600° nominal
End Voltage	maximum 0.2% of input voltage
Tap Tolerance (voltage tap only)	± 0.05% of input voltage
Resolution	essentially infinite
Temperature Coefficient of Resistance	± 50 ppm/°C typical
Temperature Coefficient of Output Voltage ³	±10 ppm/°C typical

MECHANICAL

Total Mechanical Travel	3600° +15° -0°		
Number of Gangs	2 maximum		
Weight (single gang)	0.75 oz. nominal		
Backlash	1° maximum		
	8141, 8144, 8146, 8148	8143	
Static Stop Strength	maximum	48 oz.-in.	36 oz.-in.
Panel Nut Tightening Torque	maximum	25 lb.-in.	n/a
Shaft End Play	maximum	0.010"	0.005"
Shaft Runout	maximum T.I.R.	0.003"	0.002"
Pilot Diameter Runout	maximum T.I.R.	0.004"	0.002"
Lateral Runout	maximum T.I.R.	0.005"	0.004"
Shaft Radial Play	maximum	0.003"	0.002"
Start/Run Torque (per gang, ES option adds 0.5 oz.-in.)	maximum	0.8 oz.-in.	0.6 oz.-in.

¹ Specifications subject to change without notice.

² Linearity is measured between 1% and 99% of input voltage.

³ Measured with 10 VDC CW to CCW and slider at 50% of electrical travel.

* Model available in 3 & 5 turn versions.




Model 8140 series

ENVIRONMENTAL (MIL-PRF-39023)

Operating Temperature Range	-40°C to +125°C dynamic, -55°C to +125°C static
Temperature Cycling	5 cycles, -40°C to +125°C, maximum 5% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	15 G's, 10 to 2,000 Hz, maximum 5% ΔR, 0.1 ms maximum discontinuity
Moisture Resistance	Five 24 hour cycles, maximum 5% ΔR
High Temperature Exposure	1,000 hours at 125°C, maximum 5% ΔR
Rotational Load Life (1 lb side load for 8148)	5 million shaft revolutions + 900 hours at 2.0 Watts & 70°C, maximum 5% ΔR
Ingress Protection Rating (IP Code)	IP50, IP66 available as option (feature code ES)


ORDERING INFORMATION

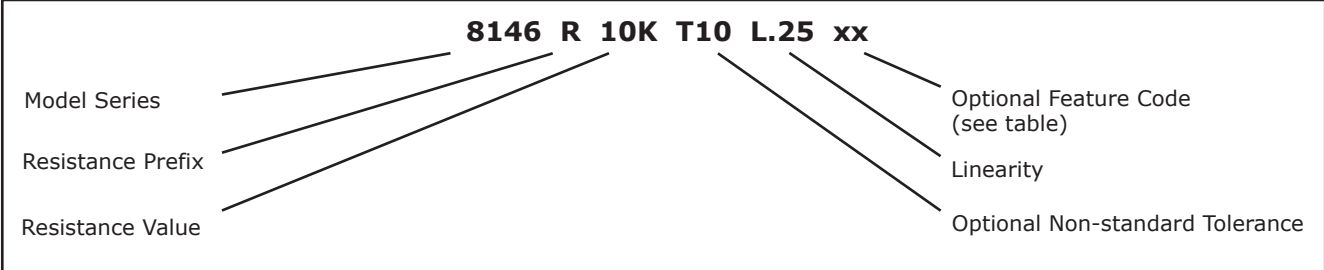

FEATURE CODES

Center Tap	CT	When multiple Feature codes are used the P/N shall be in the same sequence as listed in this table (top to bottom).
Linearity Tape	LT	
Flatted Shaft	FS	
Slotted Shaft (standard on single gang 8146 without RS feature)	SS	
Rear Shaft Extension (8143, 8146 single cup only)	RS	
Shaft Lock (8146 only)	SL	
High Torque 2-6 oz.-in. (8146 only)	HT	
Additional Gang	2G	
Gold Plated Solder Lug Terminals (see optional terminal configuration)	FT	
Seal (IP66) 8144, 8146, or 8148 only	ES	

CIRCUIT DIAGRAM

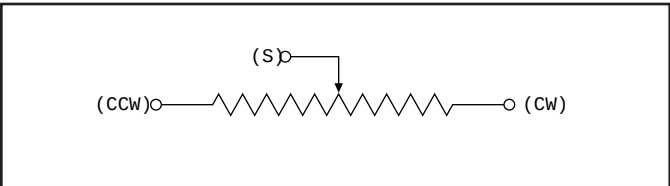

STANDARD RESISTANCE VALUES

1K	2K	5K	10K	20K	50K	100K
----	----	----	-----	-----	-----	------

Model 8140 series


MATCHING TURNS COUNTING DIALS

8141: RBJ, 2601, 2641

8146: 2606, 2607, 2626, 2627, 2646, 2126, 2606S, 2607S, 2646S, 2647S, RB


OUTLINE DRAWINGS

Models 8141 & 8146 Bushings Mount with Sleeve Bearing

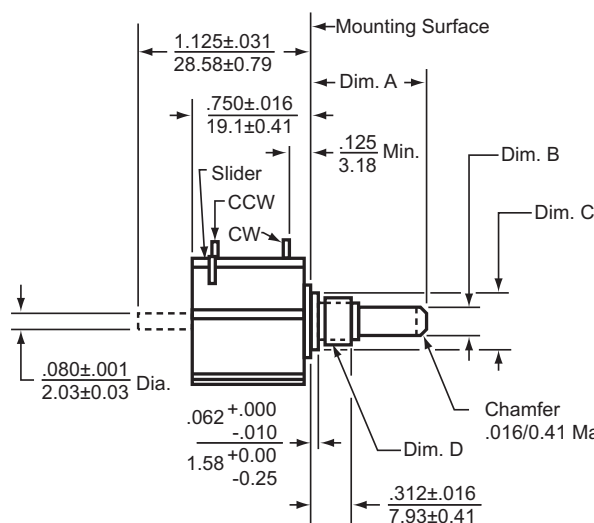


Dim.	8141	8146
A	$\frac{.688 \pm .031}{17.475 \pm 0.787}$	$\frac{.812 \pm .031}{20.625 \pm 0.787}$
B	$\frac{.1248 \pm .0000}{3.1699 \pm 0.0000} \text{ Dia.}$ $\frac{-.0003}{-0.0076}$	$\frac{.2500 \pm .0000}{6.3500 \pm 0.0000} \text{ Dia.}$ $\frac{-.0005}{-0.0127}$
C	$\frac{.281 \pm .000}{7.137 \pm 0.000} \text{ Dia.}$ $\frac{-.002}{-0.051}$	$\frac{.406 \pm .000}{10.312 \pm 0.000} \text{ Dia.}$ $\frac{-.002}{-0.051}$
D	1/4-32 UNEF Thread	3/8-32 UNEF Thread


Slot: .032±.005/0.813±0.127 Wide X
.032±.010-.000/0.813±0.254-0.000 Deep
(Not on Rear Shaft Models)



Optional Terminal Configuration

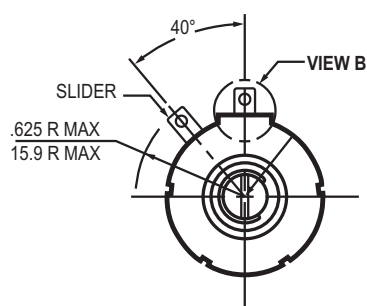

Use Special Feature Code "FT" to order.

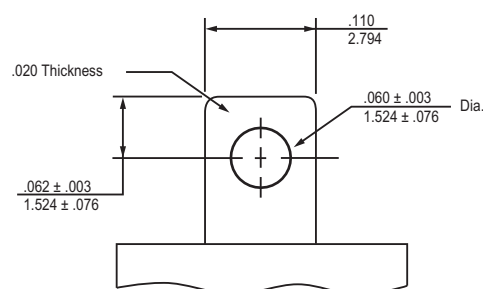

Enlarged View B

BI Technologies Corporation

4200 Bonita Place, Fullerton, CA 92835 USA

Phone: 714 447 2345 Website: www.bitechnologies.com

February 19, 2015


Model 8140 page 3 of 4




Model 8140 series

OUTLINE DRAWINGS (continued)


Model 8143 Servo Mount with Ball Bearing

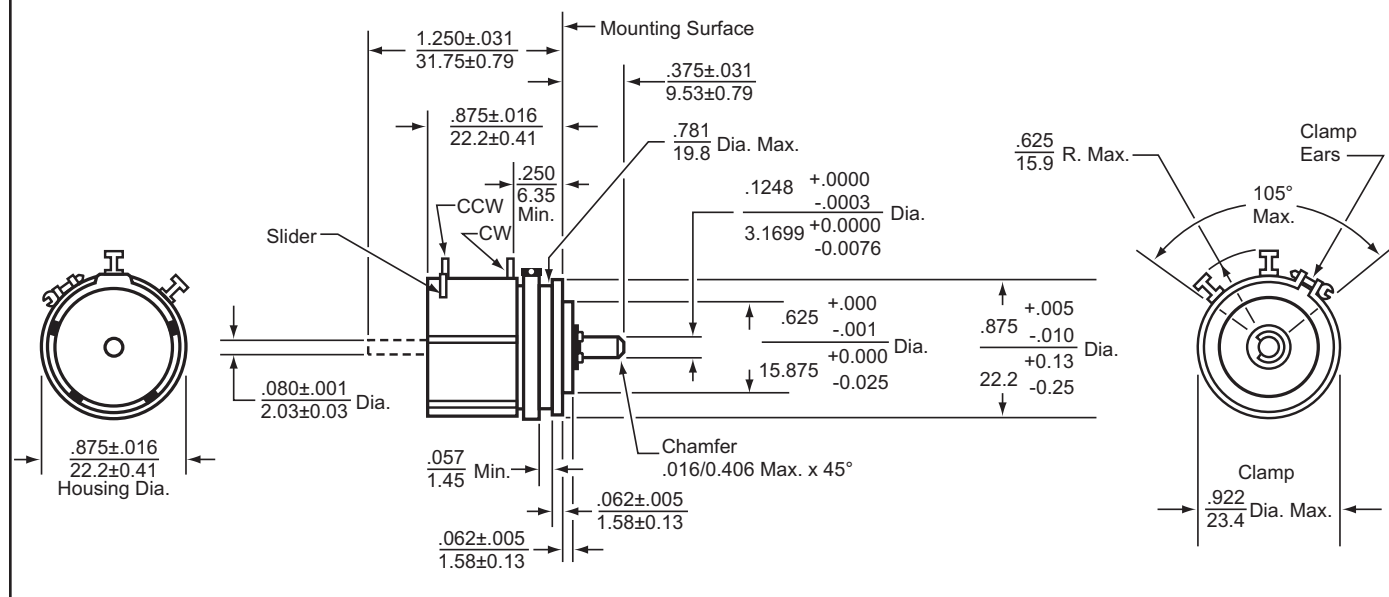

Optional Terminal Configuration

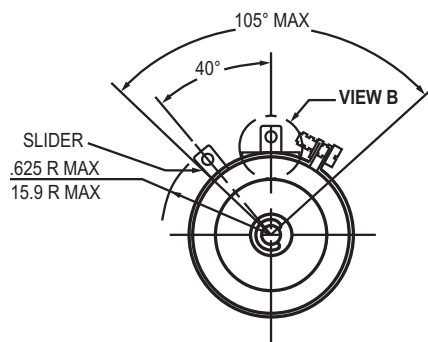

Use Special Feature Code "FT" to order.

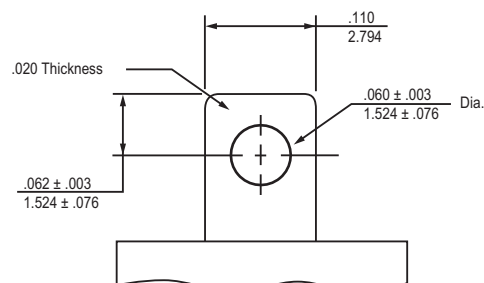

Enlarged View B

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com