

AWSP100-5

Description:

The AWSP100-5 is a single output power supply. This power supply is designed for a wide variety applications where high reliability is desired, including applications for the industrial and telecommunications markets. Excellent performance specifications are provided, together with compliance to European EMC (EN55022, Class B and EN61000-3-2), and Low Voltage directive (TUV EN60950).

Specifications (@25C)

Input Characteristics:

| | |
|------------------------|--------------------------------------|
| Input Voltage: | 88-264Vac |
| Input Frequency Range: | 47-63Hz |
| Max Input Current: | 1.8A @ Vin (rated) |
| Max Inrush Current: | 20A@110Vac, 40A@220Vac at cold start |
| Power Factor: | >0.92 |
| Leakage Current: | <3.5mA/240Vac |

Output Characteristics:

| | |
|--------------------------|--|
| Output Voltage: | 5Vdc |
| Output Current: | 20.0A |
| Output Power: | 100W |
| Adjustable Output Range: | ±10% |
| Ripple & Noise: | 100mV |
| Load Regulation: | ±1.0% |
| Line Regulation: | ±0.5% |
| Efficiency: | 75% |
| Temperature Drift: | <0.03%/°C (10-50°C) |
| Start-up Time: | 300ms max @ 230VAC |
| Hold-up Time: | 20ms min, 100% Load@230VAC |
| Rise-up Time: | 600ms max, 100% Load@230VAC |
| Over Current Protection: | At 105%<Load<150% |
| Over Voltage Protection: | At 125%<Load<145%@I/P:115/230VAC. Reset by recycle AC ON/OFF |

General Specifications:




| | |
|-----------------------|--|
| Switching Frequency: | 134kHz (PWM) / 67kHz (PFC) |
| Dimension (LxWxH): | 199x98x42 |
| Weight: | 560g net, 610g gross |
| Cooling: | Natural Convection |
| Isolation Resistance: | I/P—O/P, I/P—FG, O/P—FG: 500VDC/100Mohms |
| Dielectric Strength: | I/P—O/P: 3KVac; I/P—FG: 2.5KVac; O/P—FG: 0.5KVac 1 min |
| Warranty: | 2 years |

Environmental Specifications:


| | |
|------------------------|---|
| Operating Temperature: | -10° to 60°C |
| Operating Humidity: | 20 to 90% RH, non-condensing |
| Storage Temperature: | -25 to 75°C |
| Storage Humidity: | 10 to 95% RH, non-condensing |
| Vibration: | 10-55Hz, 2G 1min/cycle, period of 60min, each X, Y & Z axis |

EMC & Safety Specifications:

| | |
|--------------------------|--|
| EMC Emissions: | Conforms to EN55022,VCCI,CISPR22 Class B (Conducted & Radiated); IEC-61000-4-2, 61000-4-4, 61000-4-5, 61000-4-11 |
| ESD Susceptibility: | EN61000-4-2 (15kV/8kV) |
| Radiated Susceptibility: | EN61000-4-3 (3V/m) |
| Fast Burst: | EN61000-4-4 (2kV) |
| Surge: | EN61000-4-5 (1kV/2kV) |
| Safety Approval: | UL 60950 (UL File No: E204980) TUV EN60950 (TUV No: 50058679) |

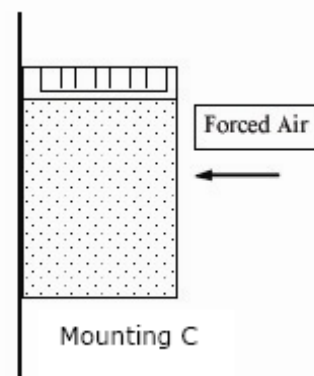


Outline Dimensions (mm):

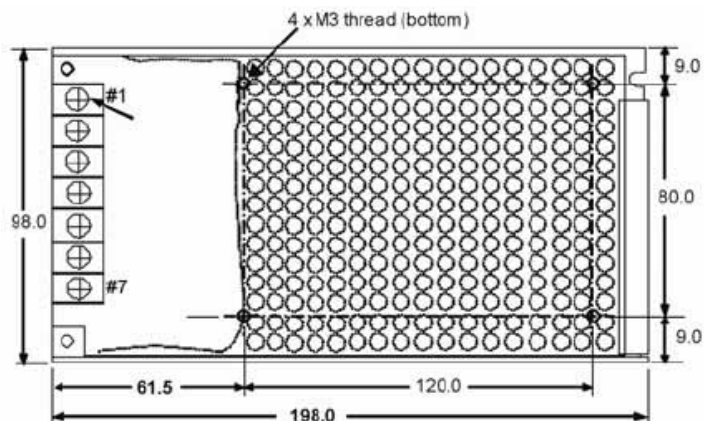


TERMINAL SCREW ASSIGNMENT

- # 1,2 : AC INPUT
- # 3 : FG
- # 4,5 : DC OUTPUT -V
- # 6,7 : DC OUTPUT +V

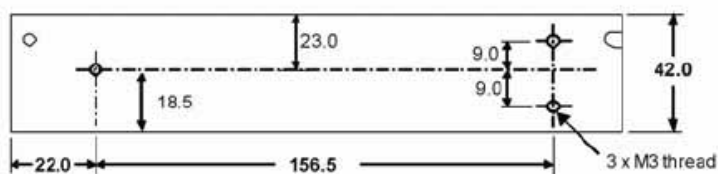

Unit : mm
Tolerance : +/-1.0mm

Derating Curve:

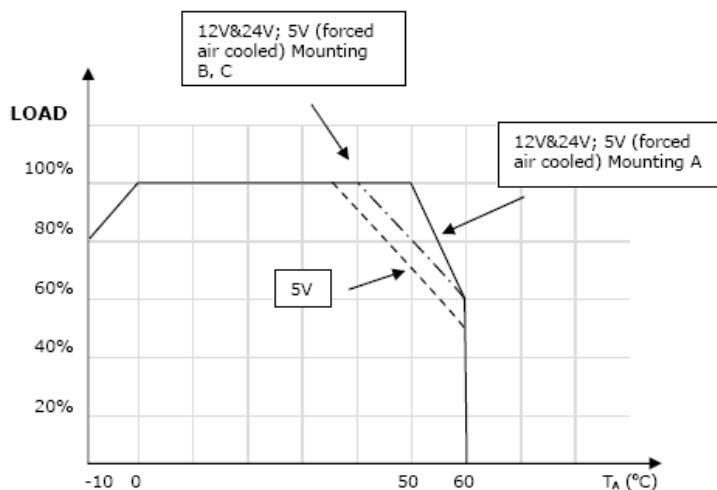

Connector Types:

Input: Screw Terminals

Output: Screw Terminals

RoHS Compliance: This power supply meets the requirements 2002/95/EC, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com