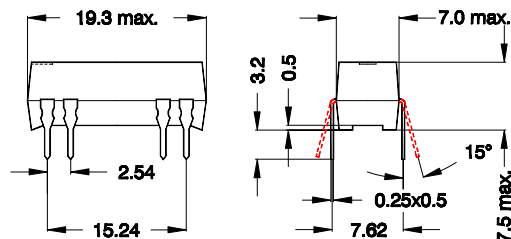



dimensions (tolerance $\pm 0,1\text{mm}$)

layout 21L pitch 2,54 / top view

marking

 Type
 data-code EN 60062

MEDER electronic
DIP15-2A72-21L

coil data	condition	Min.	Typ.	Max.	unit
coil resistance	at 20°C	1800		2200	Ω
nominal voltage			15,0		VDC
pull-in voltage				10,5	VDC
drop-out voltage		2,2			VDC
coil voltage	at 20°C			44,0	VDC
coil voltage	at 60°C			28,5	VDC
nominal power	determined with nominal voltage and rated current		113		mW

contact data 72 (Form A/Dry)					
contact material		Ruthenium			
rated power	each combination of the switching voltage and current must not exceed the given rated power			15	W
switching voltage				200	VDC
switching current				1,0	A
carry current				1,25	A
static contact resistance	initial values measured with $1,4 \times AT_{\text{pull-in}}$			150	m Ω
Insulation resistance	RH Ω 45%	10^{10}			Ω
breakdown voltage		250			VDC
capacitance	without test coil			0,3	pF

relay data					
insulation resistance coil-contact		10^{11}			Ω
insulation voltage coil-contact		1,5			kVDC
shock	$\frac{1}{2}$ sine wave, duration 11ms			150	g
vibration	50 – 2000Hz			10	g
operate time inclusive bounce	measured at $1,4 \times AT_{\text{pull-in}}$		0,5		ms
release time			0,1		ms

general data					
operating temperature		-20		70	°C
storing temperature		-35		95	°C
soldering temperature	10 sec. at			260	°C
cleaning		fully sealed			
material of case		mineral-filled epoxy			
material of pins		Cu-alloy tinned			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com