

Coiltronics HCMA0703 Series

Automotive grade

High current power inductors



Product description

- Automotive grade 3 qualified
- High current carrying capacity, low core losses
- Magnetically shielded, low EMI
- Frequency range up to 5MHz
- Inductance range from 0.15 μ H to 33 μ H
- Current range from 1.8A to 52A
- 7.4x7.0mm footprint surface mount package in a 3.0mm height
- Powder iron core material
- Halogen free, lead free, RoHS compliant

Applications

- Body electronics
 - Central body control module
 - Vehicle access control system
 - Headlamps, tail lamps and interior lighting
 - Heating Ventilation and Air Conditioning controllers (HVAC)
 - Doors, window lift and seat control
- Advanced driver assistance systems
 - 77GHz radar systems
 - Adaptive cruise control (ACC)
 - Automatic parking control
 - Collision avoidance system
 - Car black box system
- Infotainment and cluster electronics
 - Active Noise Cancellation (ANC)
 - Audio subsystem: head unit and trunk amp
 - Digital instrument cluster
 - In-Vehicle Infotainment (IVI) and navigation
 - Port power/USB HUB for front and rear passengers
- Chassis and safety electronics
 - Airbag control unit
 - Electronic Stability Control System (ESC)

Environmental data

- Storage temperature range (Component): -55°C to +125°C
- Operating temperature range: -55°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant



The Coiltronics brand of magnetics (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.

Coiltronics is now part of Eaton
Same great products plus even more.

Product specifications

Part Number ⁶	OCL ¹ (μ H) $\pm 20\%$	FLL min. ² (μ H)	I_{rms}^3 (amps)	I_{sat}^4 (amps)	DCR (m Ω) @ 20°C Typical	DCR (m Ω) @ 20°C Maximum	K-factor ⁵
HCMA0703-R15-R	0.15	0.09	26.0	52.0	1.90	2.50	1044
HCMA0703-R22-R	0.22	0.13	23.0	40.0	2.50	2.80	986
HCMA0703-R47-R	0.47	0.28	17.5	26.0	4.00	4.20	580
HCMA0703-R68-R	0.68	0.41	15.5	25.0	5.00	5.50	455
HCMA0703-R82-R	0.82	0.49	13.0	24.0	6.70	8.00	439
HCMA0703-1R0-R	1.00	0.60	11.0	22.0	9.00	10.0	374
HCMA0703-1R5-R	1.50	0.90	9.00	18.0	14.0	15.0	366
HCMA0703-2R2-R	2.20	1.32	8.00	14.0	18.0	20.0	281
HCMA0703-3R3-R	3.30	1.98	6.00	13.5	28.0	30.0	252
HCMA0703-4R7-R	4.70	2.82	5.50	10.0	37.0	40.0	210
HCMA0703-6R8-R	6.80	4.08	4.50	8.00	54.0	60.0	151
HCMA0703-8R2-R	8.20	4.92	4.00	7.50	64.0	68.0	142
HCMA0703-100-R	10.0	6.00	3.20	7.00	70.5	77.6	132
HCMA0703-330-R	33.0	19.8	1.80	2.00	220	242	76

1. Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.25V_{rms}, 0.0Adc, +25°C.

4. I_{sat} : Peak current for approximately 20% rolloff at +25°C.

5. K-factor: Used to determine B_{pp} for core loss (see graph). $B_{pp} = K * L * \Delta I$.

B_{pp} : (Gauss), K: (K-factor from table), L: (Inductance in μ H), ΔI (Peak to peak ripple current in amps).


6. Part Number Definition: HCMA0703-yyy-R

- HCMA0703 = Product code and size

- yyy= Inductance value in μ H, R = decimal point,
if no R is present then third character = number of zeros.

- "-R" suffix = RoHS compliant

Dimensions - mm

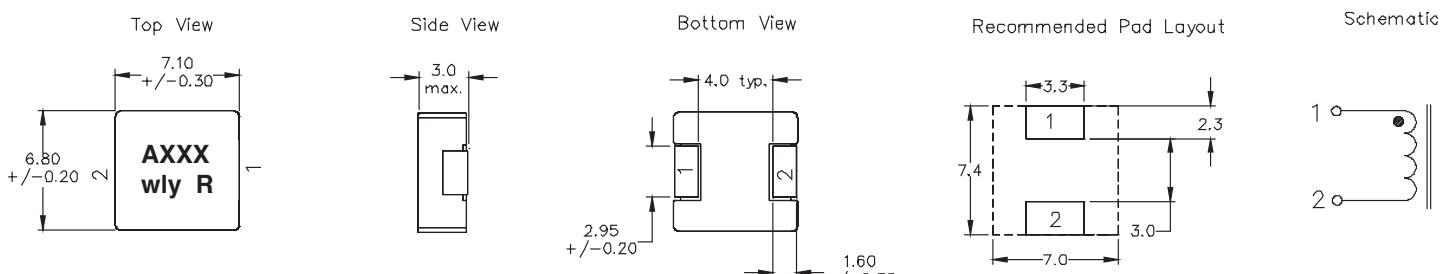


Part marking: A = Automotive grade, xxx= Inductance value in μ H , R= decimal point, If no R is present then last digit is # of zeroes
wly= Date code, R= Revision level

All soldering surfaces to be coplanar within 0.10 millimeters

Tolerances are ± 0.2 millimeters unless stated otherwise.


Color: Grey

Packaging information - mm

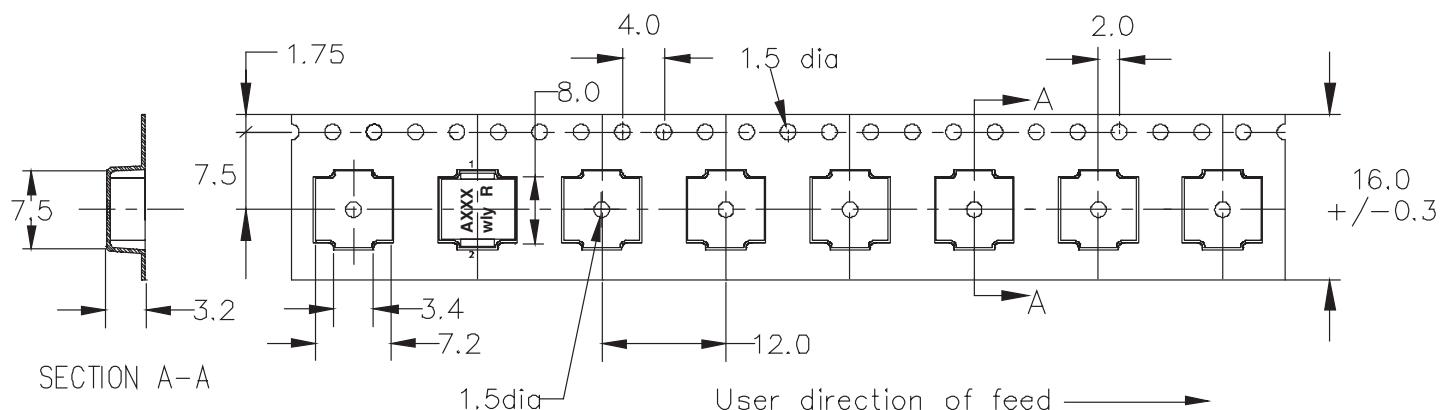


Supplied in tape and reel packaging, 1500 parts per 13" diameter reel.



Temperature rise vs. total loss

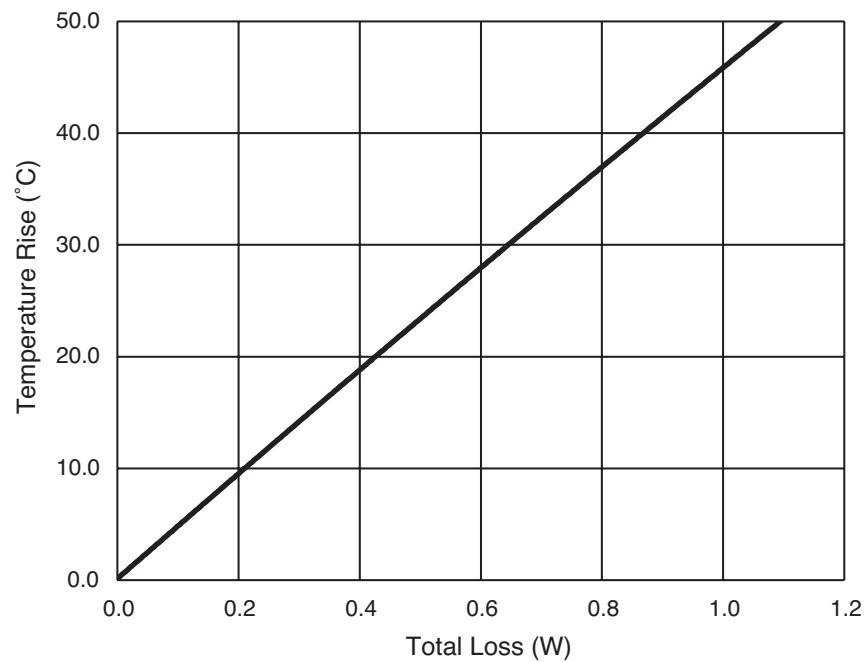







Core loss

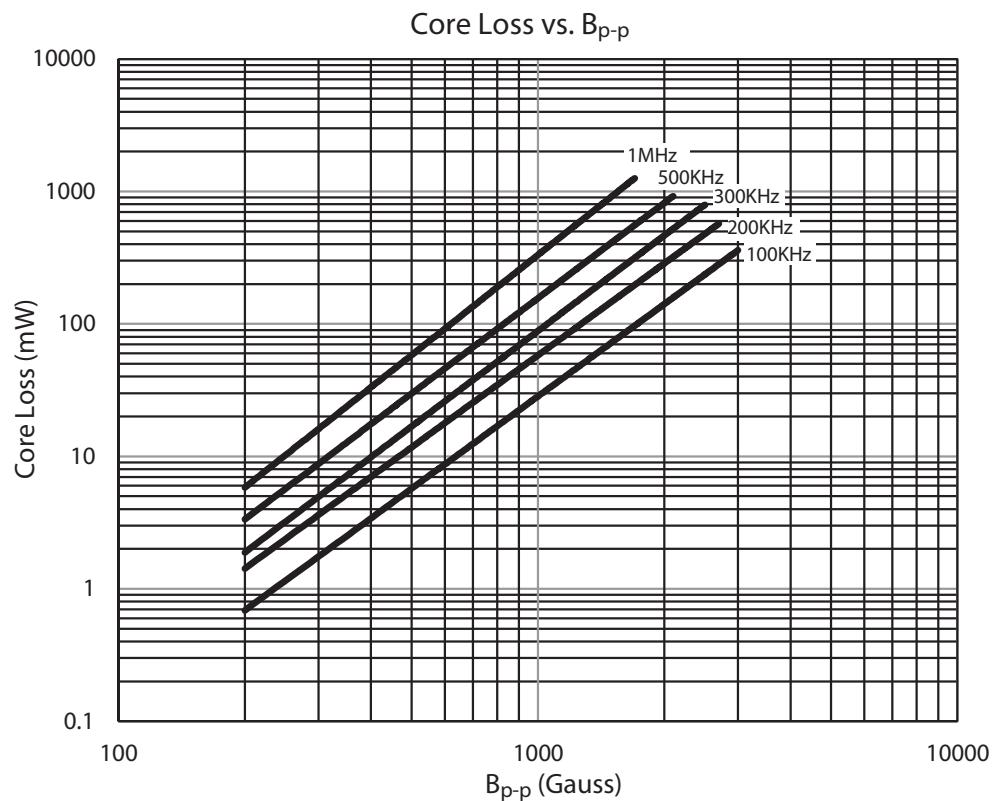







Inductance characteristics

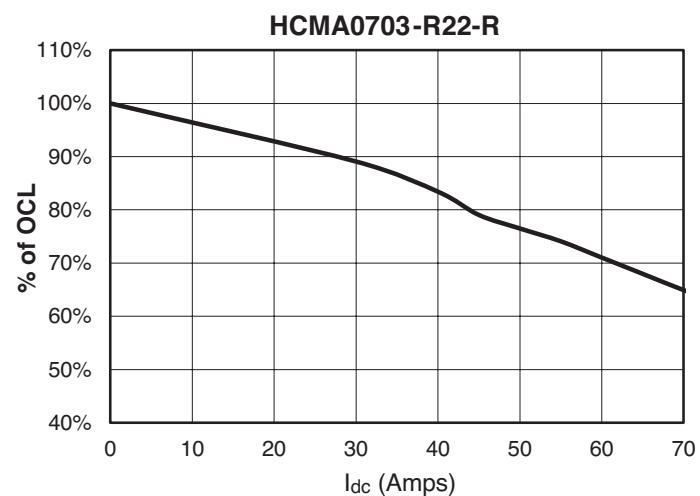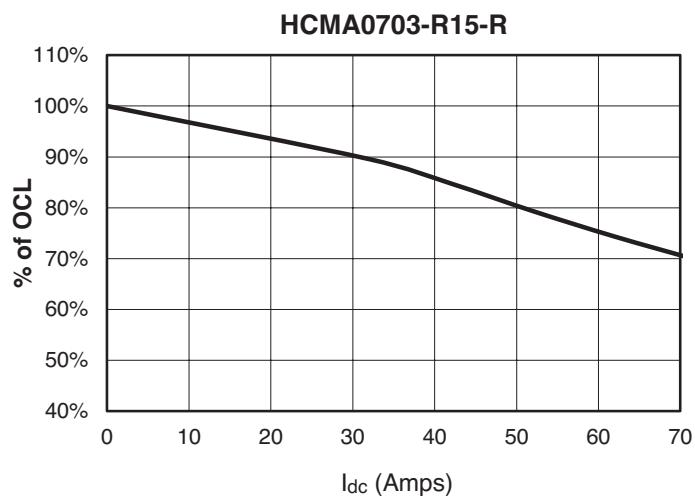

Inductance characteristics

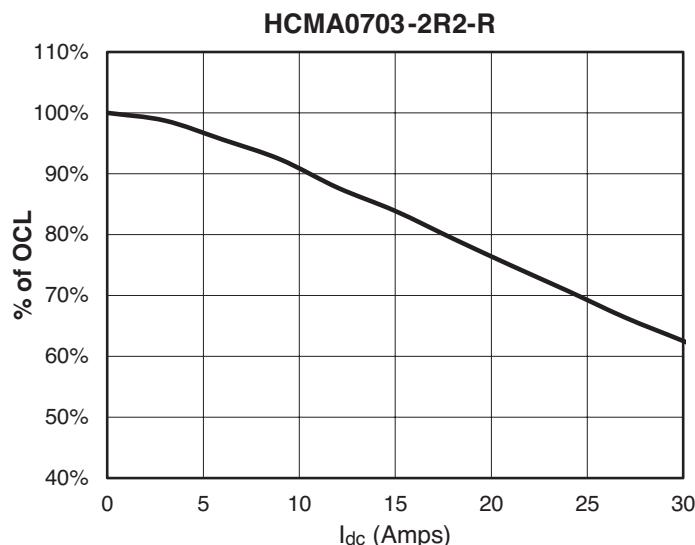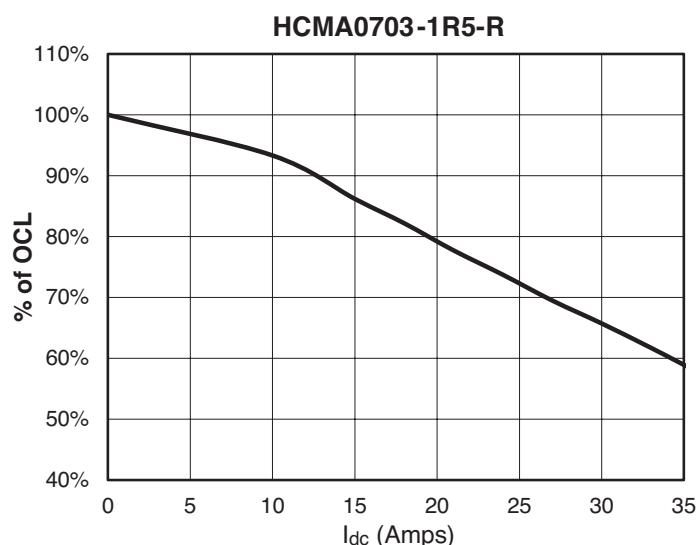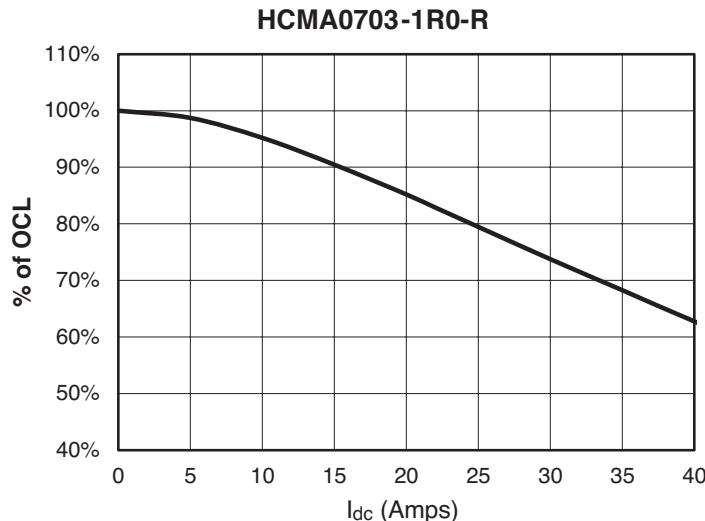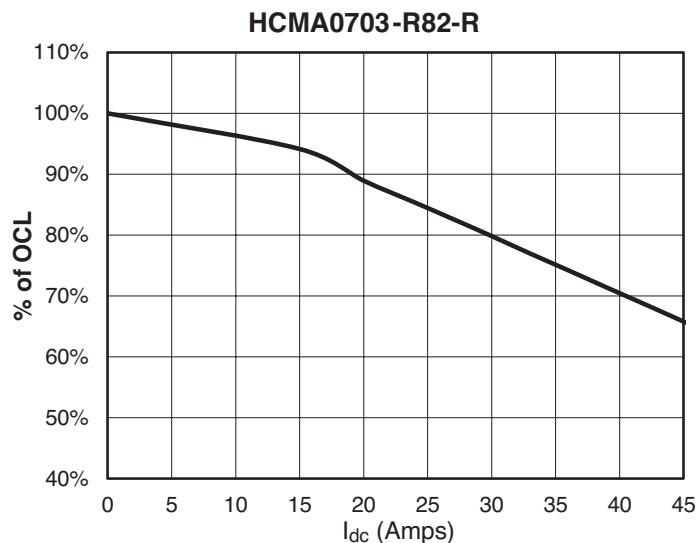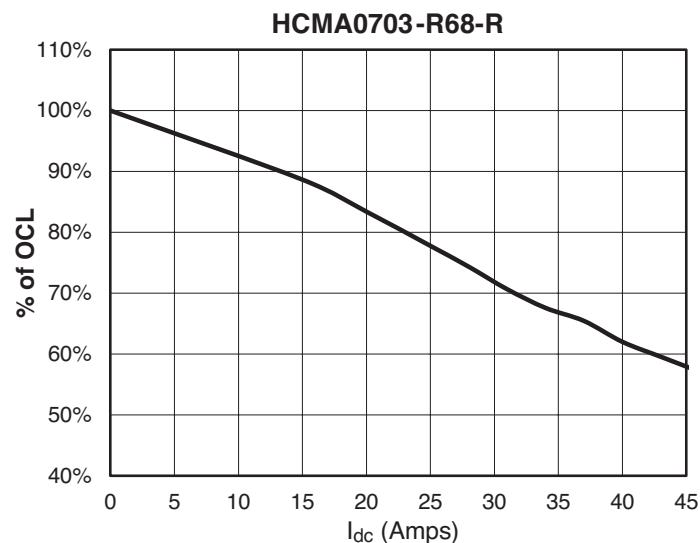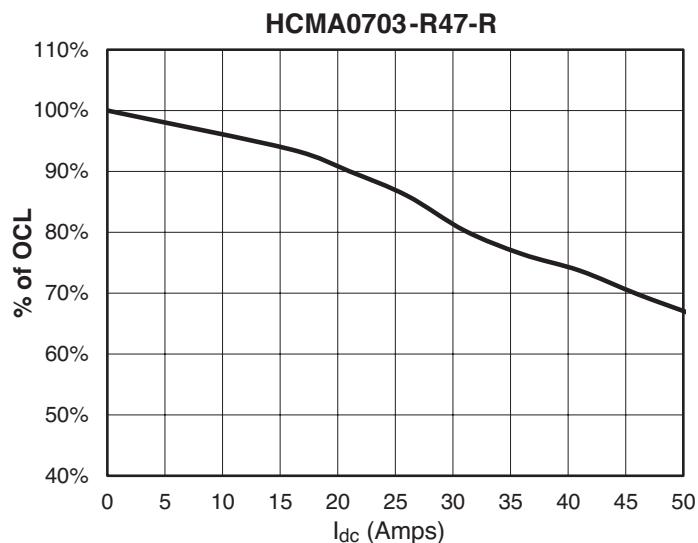

Inductance characteristics

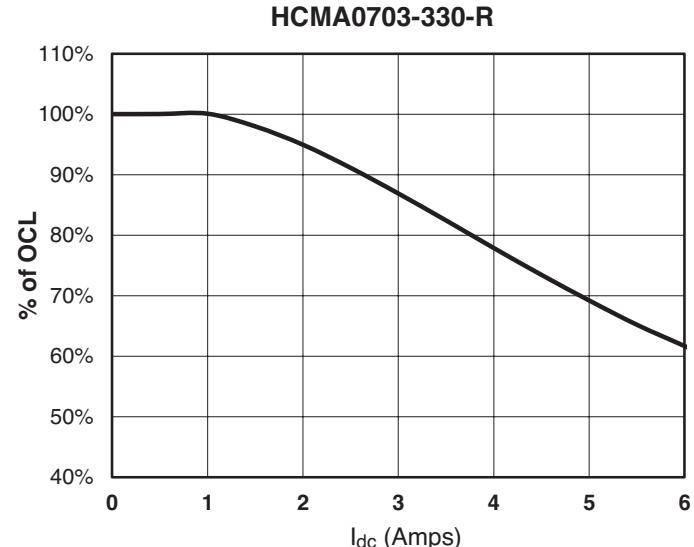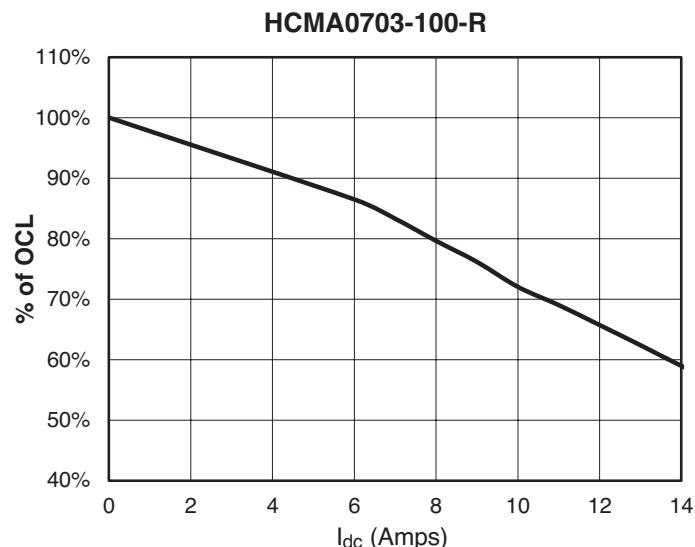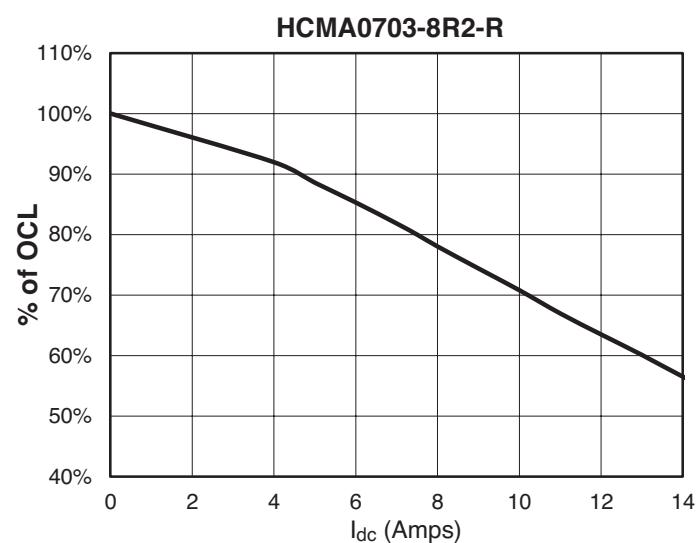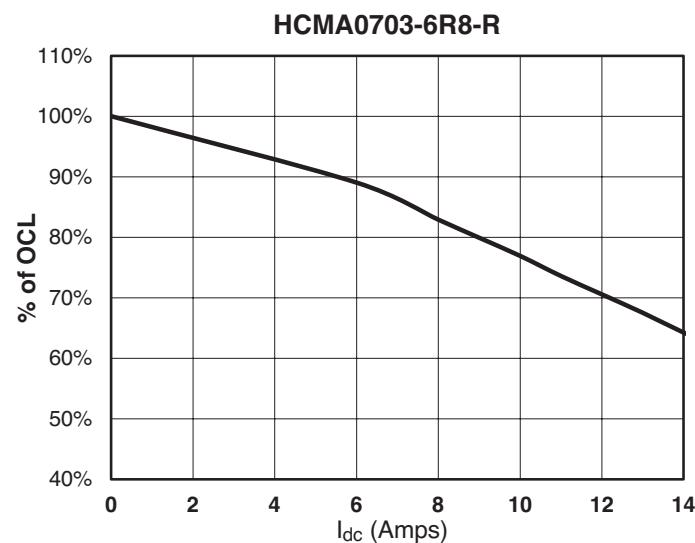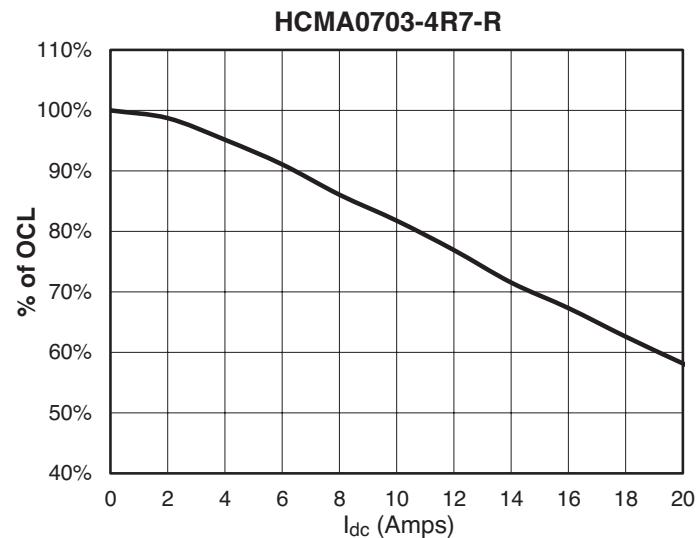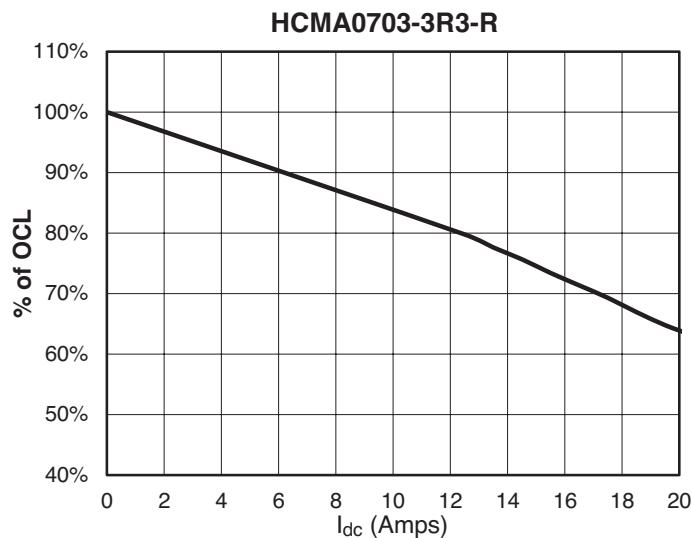

Solder reflow profile

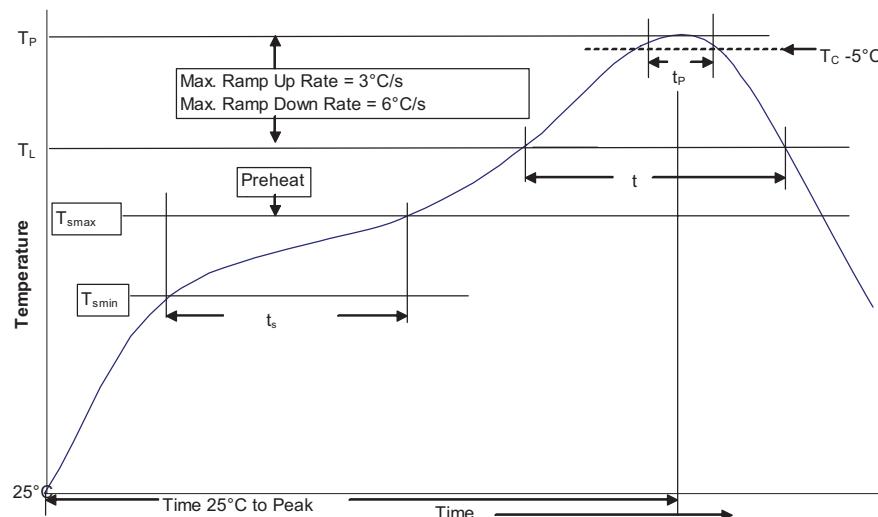


Table 1 - Standard SnPb Solder (T_c)

Package	Volume mm ³	Volume mm ³
Thickness	<350	≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package	Volume mm ³	Volume mm ³	Volume mm ³
Thickness	<350	350 - 2000	>2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak	100°C	150°C
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Eaton's Electrical Group
Electronics Division
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Eaton's Electrical Group
Electronics Division
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Eaton's Electrical Group
Electronics Division
Burton-on-the-Wolds
Leicestershire, LE 12 5th UK
Phone: +44 (0) 1509 882 600
Fax: +44 (0) 1509 882 786

Asia Pacific

Eaton's Electrical Group
Electronics Division
No.2, #06-01
Serangoon North Avenue 5
Singapore 554911
Tel: +65 6645 9888
Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com