

SPECIFICATION

Part No.	:	GW.59.3153
Product Name	:	2.4GHz/5.1~5.85GHz 3dBi Screw mount Dipole
		Antenna
Description	:	RP-SMA Male Straight Connector
		Hinged
		IP-65
		TPU Housing
		Length 156mm
		ROHS Compliant





1. Introduction

The GW.59 dipole RP-SMA plug mount antenna is ideal for 2.4GHz/5.15~5.85GHz wireless applications such as Bluetooth and Wireless LAN. At 156mm in length omni-directional 3dBi gain across all bands ensures constant reception and transmission. The antenna structure is designed for robust handling and the housing is made with TPU giving superior environmental reliability and a quality finish. The antenna can be rotated 90 degrees on the base hinge for ease of placement.

Many module manufacturers specify peak gain requirements for any antennas that is to be connected to that module. Upon testing of any of our antenna with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas peak gain will be below the peak gain requirements. Taoglas can then issue a specification and/or report for this selected WiFi antennas in your device that will clearly show it complying with the peak gain requirements, so you can be assured you are meeting regulatory requirements for that module.

It is better not to select an embedded antenna with very low free-space peak gain (<2dBi) directly, as this antenna would have worse performance in your device, and lead to compromised performance compared to using a Taoglas antenna.




2. Specification Table

Parameter	GSM Band		
Frequency	2.4 ~ 2.5GHz,	5.15 ~ 5.85GHz	
Peak Gain (dBi)*	2.37	2.93	
Average Gain (dBi)*	-1.21	-1.32	
Efficiency (%)*	75	73	
Return Loss (dB)*	- 10 dB Maximum		
Radiation	Omni-directional		
Polarization	Linear Vertical		
Power Handling	1W		
Impedance	50 Ω		
	MECHANICAL		
Cable	RG-178 Coaxial Cable		
Antenna Cover	TPE		
Antenna Base	PC & PBT		
Color	Black		
Connector	RP-SMA(M)		
IP rating	IP65		
	ENVIRONMENTAL		
Operation Temperature	-40°C ~ + 85°C		
Storage Temperature	-40°C ~ + 85°C		

*The antenna was measured in free space.




3. Antenna Characteristics

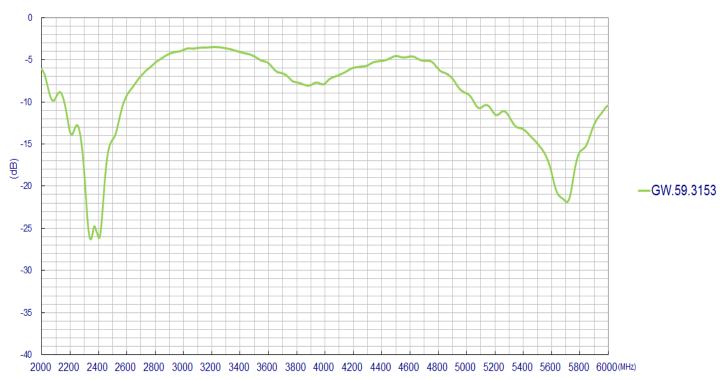

3.1. Return Loss




3.2. Peak Gain

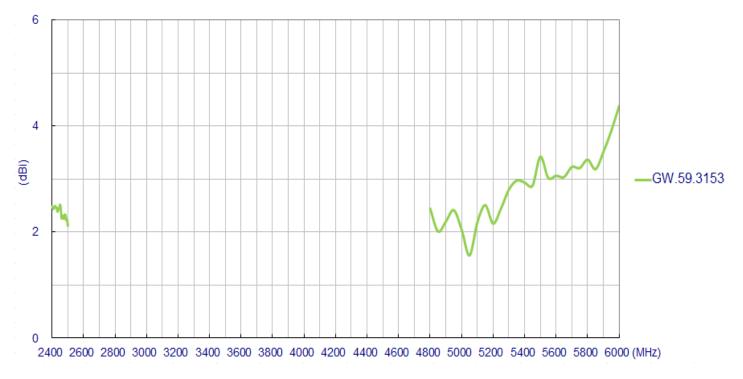




3.3. Average Gain

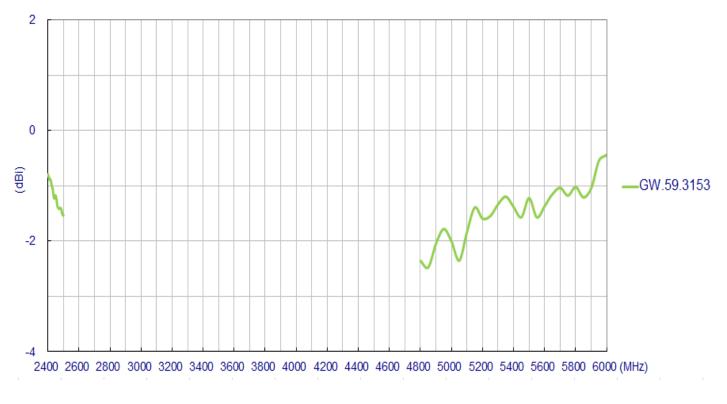


3.4. Efficiency

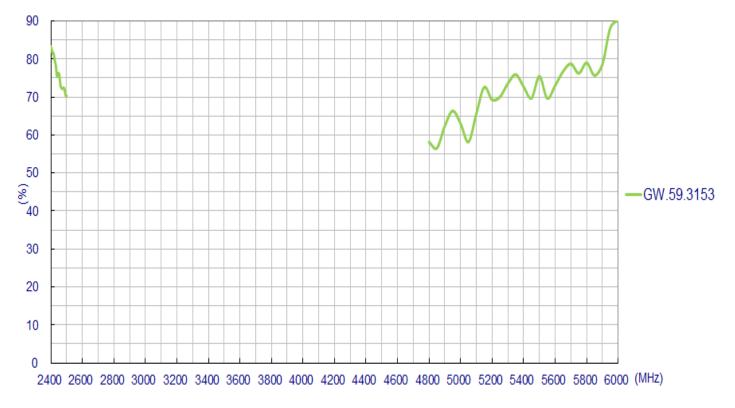



4. Radiation Patterns

The antenna radiation pattern was measured in ETS Anechoic Chamber. The testing setup is as below. The antenna was measured in free space.

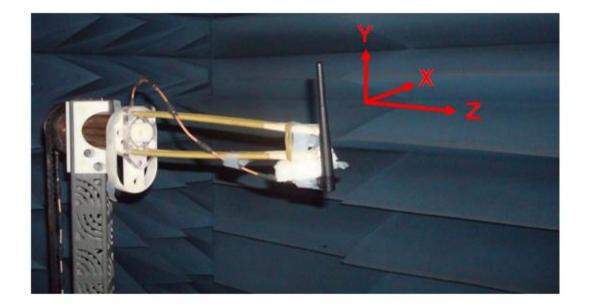




X 0 5 330 30 -5 -15 60 300 -25 Y -35 270 -45 90 2400MHz 240 120 2450MHz 210 150 2500MHz (dBi) 180


XZ Plane

Ζ

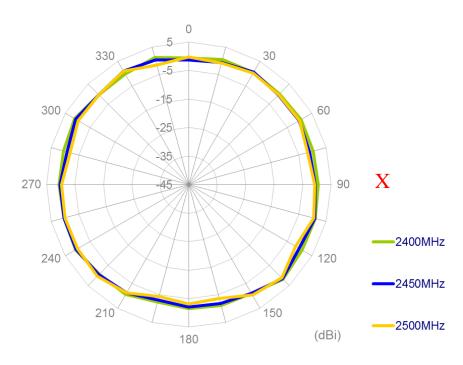


XY Plane



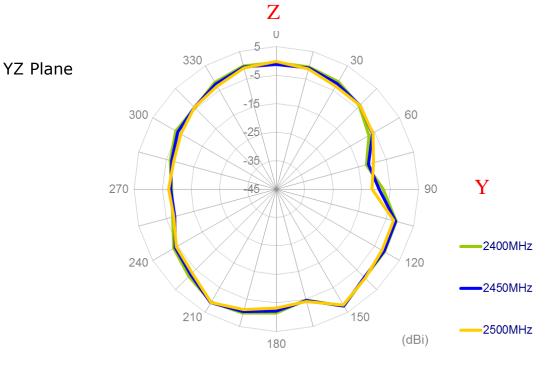


XY Plane

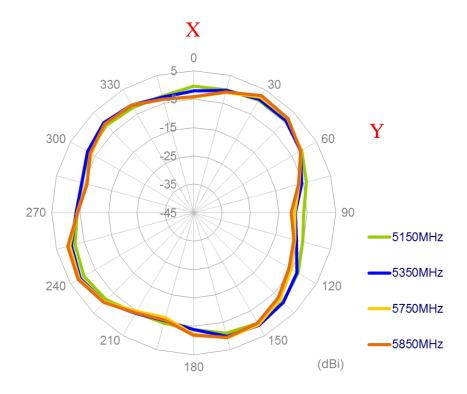




XZ Plane

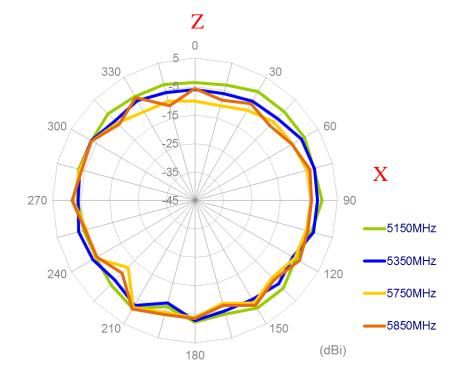


YZ Plane

Ζ

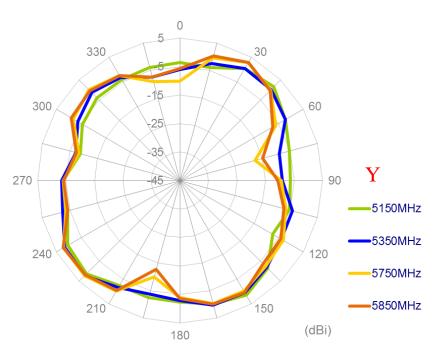



5. Drawing

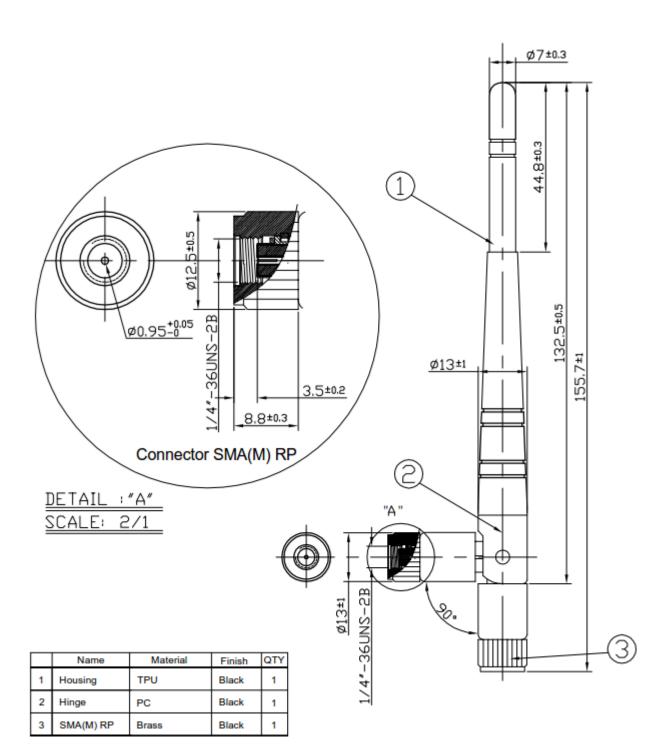



6. APPLICATION NOTE

6.1 GW.59 antenna measurement setup as shown the below ,(40mmx60mm PCB board)

On the short side





Antenna straight

Antenna R/A

On the long side



Antenna straight

Antenna R/A



On the 30cmX30cm ground plane





On the 50cmX50cm ground plane




Antenna straight

Antenna R/A

Antenna straight

Antenna R/A

6.2 Return Loss when antenna setup on different conditions

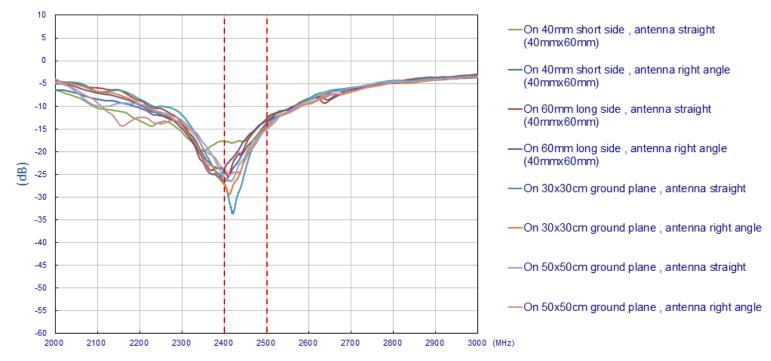



6.3 GW.59 antenna measurement, (40mmx100mm PCB board)

On the short side





On the long side




Antenna straight

Antenna R/A

Antenna straight

Antenna R/A

6.4 Return Loss when antenna setup on different conditions

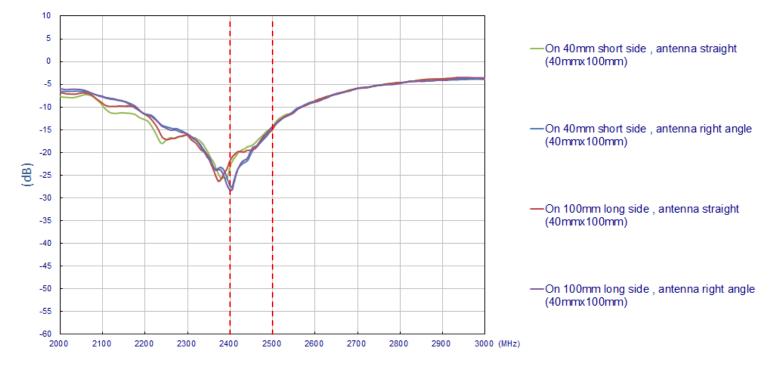



6.5 GW.59 antenna measurement, (90mmx150mm PCB

board)

On the short side

On the long side










Antenna straight

Antenna R/A

Antenna straight

Antenna R/A

6.6 Return Loss when antenna setup on different conditions

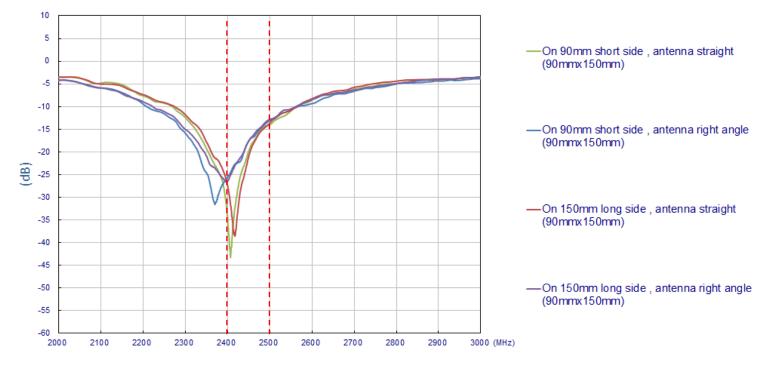

AMEYA360 Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

> Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales :

- Direct +86 (21) 6401-6692
- Email amall@ameya360.com
- QQ 800077892
- Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

> Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com