


PV9 SERIES ANTI-VANDAL SWITCH


ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS




APPLICATIONS / MARKETS




Audio / Visual



Security Devices




Industrial Controls



Kiosks



Electrical Housewares



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 2A, 48VDC
Mechanical Life: 1,000,000 Cycles
Electrical Life: 50,000 Cycles
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1000 MΩ Min. @ 500VDC
Dielectric Strength: 2,000VAC
Operating/Storage Temperature: -20°C to 55°C
Travel: 2.8mm
Moisture Protection: IP65
Contact Arrangement: SPDT or DPDT
Actuation Force: 660 gf
Panel Thickness: 1-10mm
Hex Nut Torque: 5-14Nm

FEATURES & BENEFITS

- 28mm diameter panel cutout
- Dot or ring illumination options available
- Multiple switch functions available
- Multiple illumination voltage options
- IP65 rated
- SPDT or DPDT

PART NUMBER CONFIGURATOR

Series	Actuator Options	Terminal Options	Function Options	Rating Options	Body Finish Options	Actuator Finish Options	Contact Material Options	Lens Style Options	LED Color Options	Illumination Voltage Options
PV9	F - Flat	2 - Solder	Y - 1P OFF-(ON), 1P ON-(OFF)*	0 - 2A, 48VDC	N - Nickel Plated	N - Nickel Plated	NONE - Silver	NONE - Non-Illuminated	NONE - Non-Illuminated	NONE - Non-Illuminated
			T - 1P OFF-ON, 1P ON-OFF		S - Stainless Steel	S - Stainless Steel	G - Gold	2 - Dot Illumination	0 - White	1 - Base Voltage [‡]
			V - 2P OFF-(ON), 2P ON-(OFF)*					3 - Ring Illumination	1 - Red	3 - 6V
			U - 2P OFF-ON, 2P ON-OFF						2 - Orange	4 - 12V
									3 - Green	5 - 24V
									4 - Blue	6 - 125V
									5 - Yellow	7 - 250V
									F - Red/Orange	
									G - Red/Green	
									H - Red/Blue	
									J - Red/Yellow	
									K - Orange/Green	
									L - Orange/Blue	
									M - Orange/Yellow	

NOTES:

* () denotes function is momentary

[‡] Base voltage for LED colors red, yellow, and orange is 1.8V @ 20mA

[‡] Base voltage for LED colors blue, green and white is 2.8V @ 20mA

Specifications subject to change without notice




E-SWITCH®

www.e-switch.com


800.867.2717

2

BODY DIMENSIONS

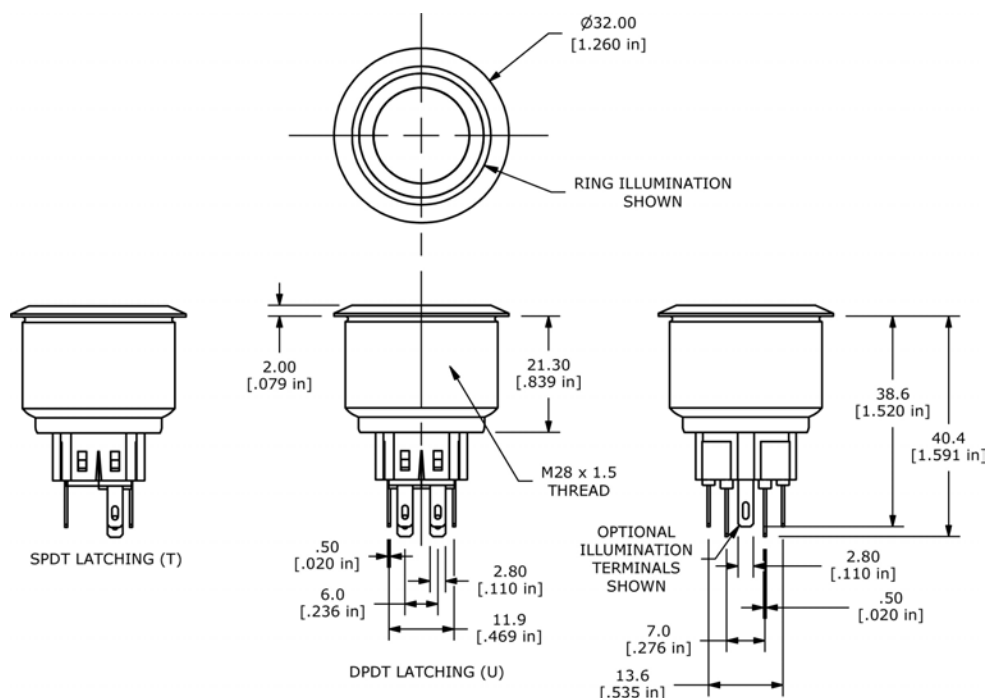





LATCHING SWITCH DIMENSIONS

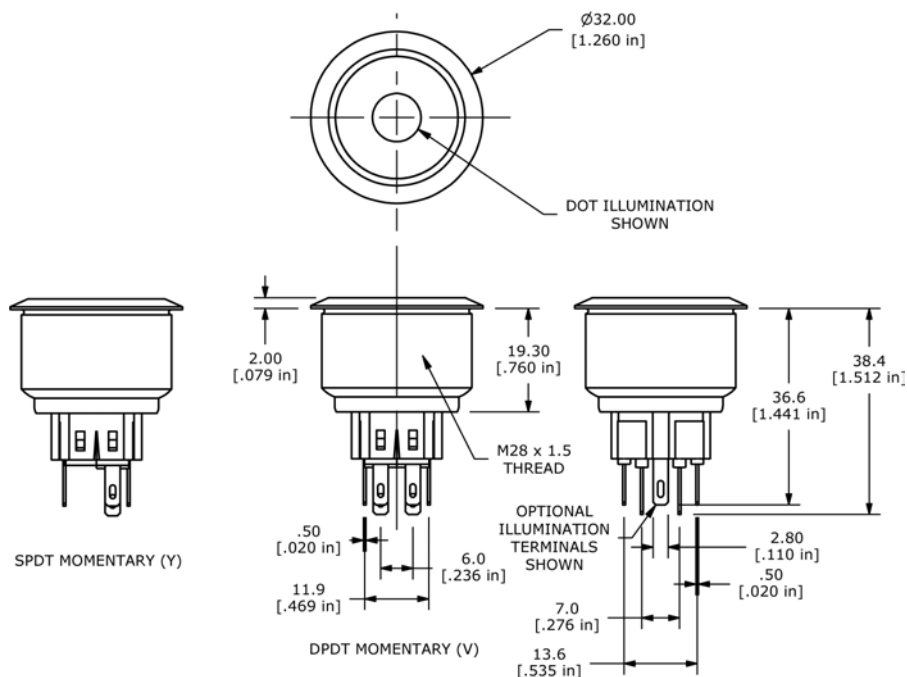



MOMENTARY SWITCH DIMENSIONS



ACTUATOR OPTIONS

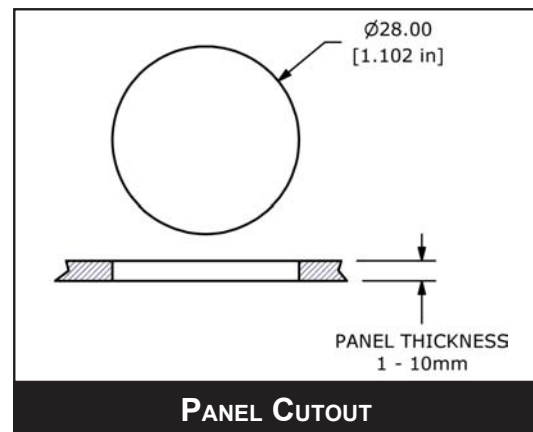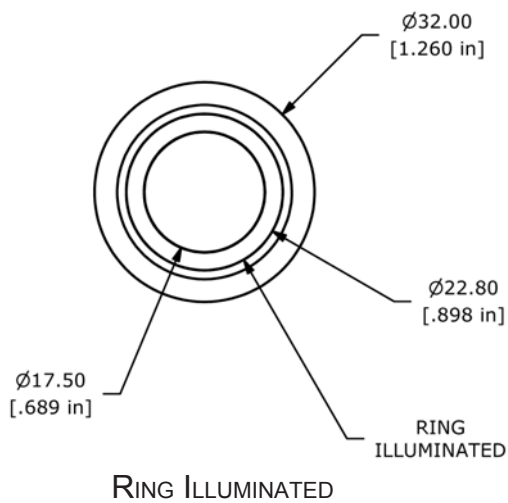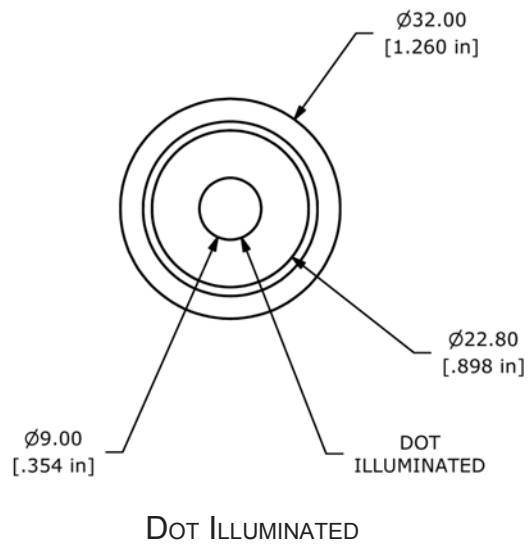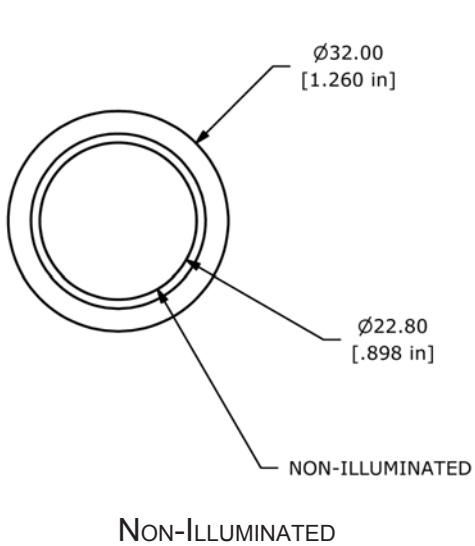

SCHEMATICS

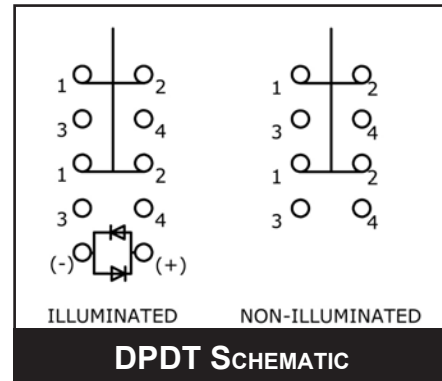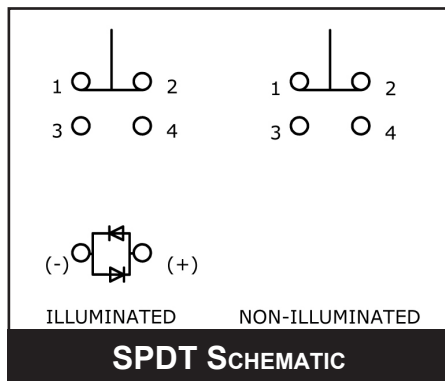

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com