

Rectifier Diode Avalanche Diode

$$V_{RRM} = 800-1800 \text{ V}$$


$$I_{F(RMS)} = 40 \text{ A}$$

$$I_{F(AV)M} = 25 \text{ A}$$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Anode on stud	Cathode on stud
900	-	800	DS 17-08A	DSI 17-08A
1300	-	1200	DS 17-12A	DSI 17-12A
1300	1300	1200	DSA 17-12A	DSAI 17-12A
1700	1750	1600	DSA 17-16A	DSAI 17-16A
1900	1950	1800	DSA 17-18A	DSAI 17-18A

① Only for Avalanche Diodes

DO-203 AA

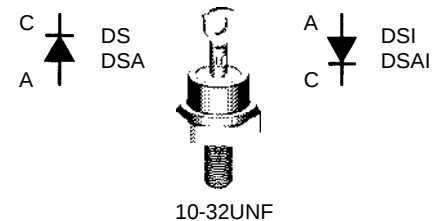

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{VJ} = T_{VJM}$	40	A
$I_{F(AV)M}$	$T_{case} = 125^{\circ}C$; 180° sine	25	A
P_{RSM}	DSA(I) types, $T_{VJ} = T_{VJM}$, $t_p = 10 \mu s$	7	kW
I_{FSM}	$T_{VJ} = 45^{\circ}C$; $V_R = 0$	370	A
	$t = 10 \text{ ms}$ (50 Hz), sine	400	A
I_{FSM}	$T_{VJ} = T_{VJM}$; $V_R = 0$	300	A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	320	A
I^2t	$T_{VJ} = 45^{\circ}C$; $V_R = 0$	680	A ² s
	$t = 10 \text{ ms}$ (50 Hz), sine	660	A ² s
I^2t	$T_{VJ} = T_{VJM}$; $V_R = 0$	450	A ² s
	$t = 8.3 \text{ ms}$ (60 Hz), sine	430	A ² s
T_{VJ}		-40...+180	°C
T_{VJM}		180	°C
T_{stg}		-40...+180	°C
M_d	Mounting torque	2.2-2.8	Nm
		19-25	lb.in.
Weight		6	g

Features

- International standard package, JEDEC DO-203 AA (DO-4)
- Planar glassivated chips


Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

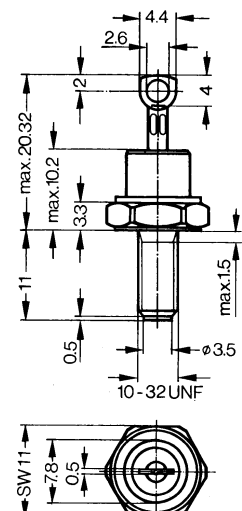

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

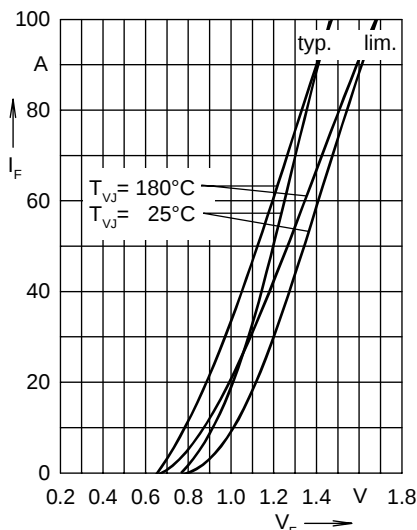


Fig. 1 Forward characteristics

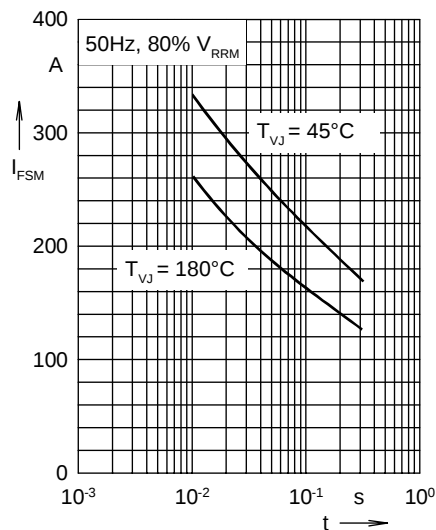


Fig. 2 Surge overload current
 I_{FSM} : crest value, t : duration

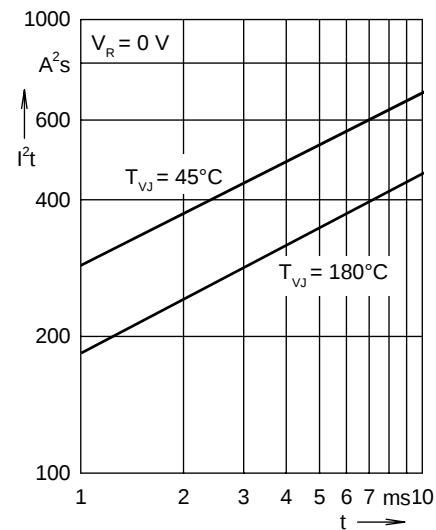


Fig. 3 I^2t versus time (1-10 ms)

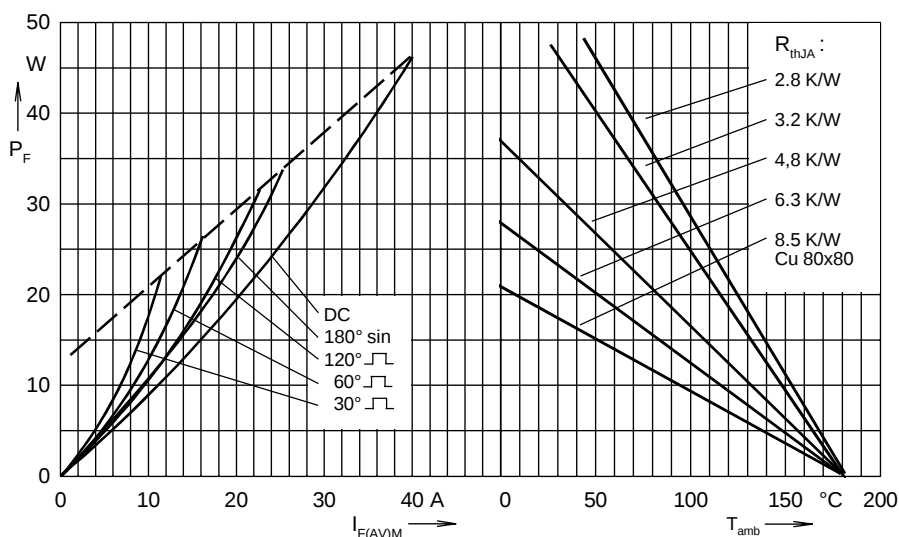


Fig. 4 Power dissipation versus forward current and ambient temperature

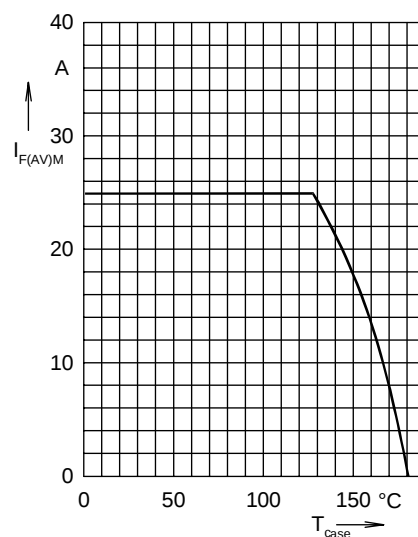


Fig. 5 Max. forward current at case temperature 180° sine

R_{thJH} for various conduction angles d :

d	R_{thJH} (K/W)
DC	2.10
180°	2.23
120°	2.33
60°	2.53
30°	2.72

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.1006	0.0021
2	0.5311	0.0881
3	0.8683	2.968
4	0.600	3.20

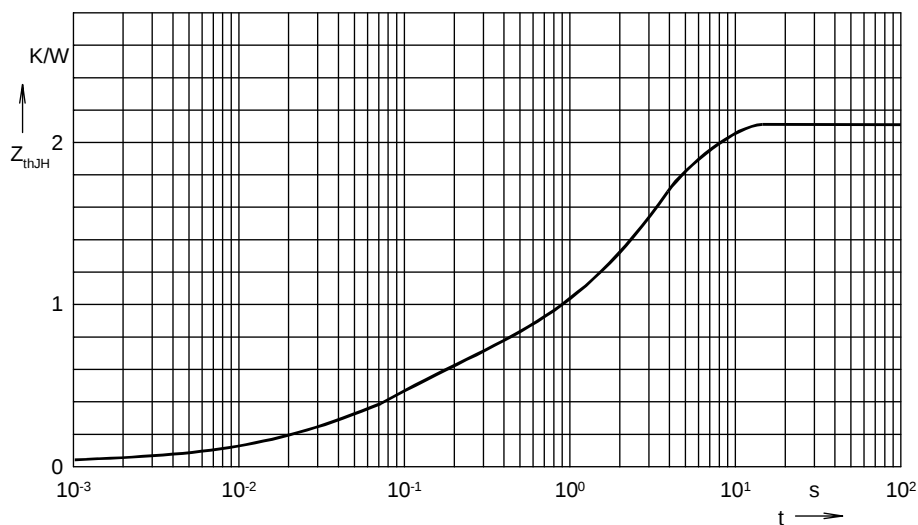


Fig. 6 Transient thermal impedance junction to heatsink

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com