


Low-Profile Shielded Drum Inductors

SD7030 Series

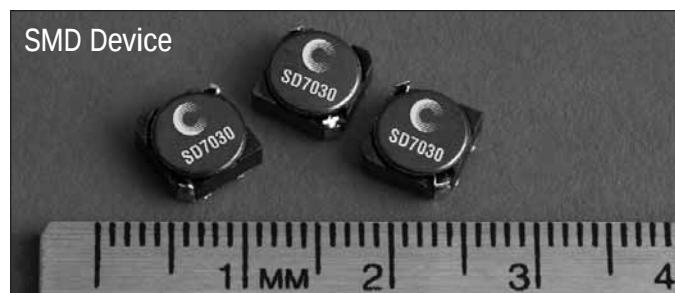

Description

- 125°C maximum total operating temperature
- Low profile 7.0 x 7.0 x 3.0mm surface mount inductors
- Ferrite material shielded drum core
- Inductance range from 1.5μH to 680μH
- Current range from 5.5 Amps to 0.21 Amps
- Frequency range up to 1MHz

Applications

- PDA's, Wireless handsets
- MP3 players, CD players, organizers
- Handheld & Portable computers, GPS receivers
- ADSL/DSL/Cable modems
- Buck and Boost inductor
- Battery power, Li-Ion, 2-cell
- Digital still camera
- White LED driver

RoHS
2002/95/EC

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum

Packaging

- Supplied in tape and reel packaging, 1500 parts per reel, 13" dia. reel

Product Specifications

Part Number	Rated Inductance (μH)	OCL ⁽¹⁾ μH ± 30%	I _{rms} ⁽²⁾ Amps	I _{sat} ⁽³⁾ Amps	DCR mΩ@25°C (Typ.)	DCR mΩ@25°C (Max)	K-factor ⁽⁴⁾
SD7030-1R5-R	1.5	1.5	5.5	4.5	10	12	32
SD7030-3R3-R	3.3	3.3	3.7	3.00	20	24	22
SD7030-3R9-R	3.9	4.1	3.4	2.60	22	27	19
SD7030-5R0-R	5.0	4.9	3.2	2.40	26	31	17
SD7030-6R0-R	6.0	5.8	2.8	2.25	29	35	16
SD7030-7R3-R	7.3	7.0	2.3	2.10	45	54	13
SD7030-8R0-R	8.0	7.8	2.2	1.85	48	58	12
SD7030-100-R	10	10.0	2.1	1.70	54	65	11
SD7030-120-R	12	11.5	1.9	1.55	58	70	10
SD7030-150-R	15	14.6	1.7	1.40	70	84	9.3
SD7030-180-R	18	17.3	1.7	1.32	79	95	8.8
SD7030-220-R	22	21.0	1.4	1.20	107	128	7.6
SD7030-260-R	26	24.9	1.3	1.05	118	142	6.9
SD7030-300-R	30	30.0	1.2	0.97	138	165	6.4
SD7030-390-R	39	39.7	1.1	0.86	175	210	5.7
SD7030-440-R	44	43.4	1.1	0.80	198	238	5.3
SD7030-560-R	56	54.4	0.99	0.73	231	277	4.9
SD7030-680-R	68	66.6	0.85	0.65	253	304	4.3
SD7030-820-R	82	81.4	0.82	0.60	325	390	4.0
SD7030-101-R	100	95.5	0.70	0.54	446	535	3.6
SD7030-121-R	120	115.2	0.67	0.50	629	755	3.3
SD7030-151-R	150	145	0.57	0.44	715	858	2.9
SD7030-181-R	180	174	0.54	0.40	805	966	2.7
SD7030-221-R	220	211	0.51	0.36	1102	1322	2.4
SD7030-271-R	270	264	0.44	0.33	1259	1475	2.2
SD7030-331-R	330	317	0.38	0.30	1438	1725	2.0
SD7030-391-R	390	381	0.36	0.27	1857	2228	1.8
SD7030-471-R	470	460	0.34	0.25	2150	2581	1.7
SD7030-561-R	560	561.0	0.29	0.23	2857	3428	1.5
SD7030-681-R	680	677.2	0.28	0.21	3206	3847	1.4

(1) Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0A_{dc}.

(2) I_{rms}: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

(3) I_{sat}: Amps peak for approximately 35% rolloff (@25°C)

(4) K-factor: Used to determine B_{p-p} for core loss (see graph). B_{p-p} = K*L*ΔI, B_{p-p}(mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak-to-peak ripple current in Amps).


(5) Part Number Definition: SD7030-xxx-R

SD7030 = Product code and size; -xxx = Inductance value in μH;

R = decimal point; If no R is present, third character = # of zeros.


-R suffix = RoHS compliant

Dimensions - mm

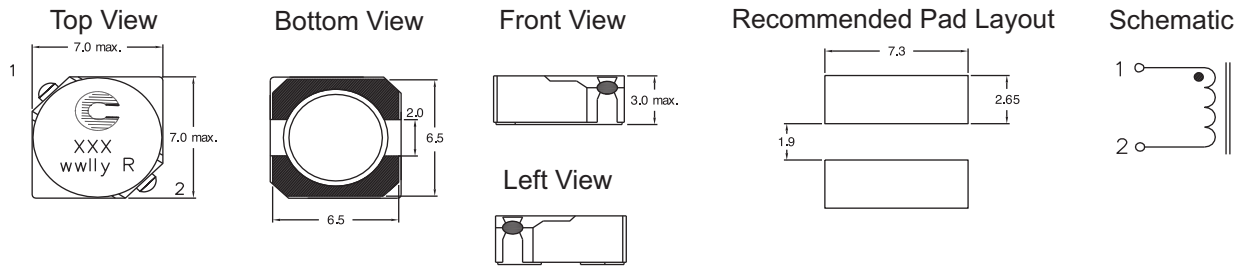


Part Marking: Coiltronics Logo xxx = inductance value in μH . R = decimal point. If no "R" is present, third character = # of zeros. wwlyy = date code. R = revision level


Packaging Information - mm

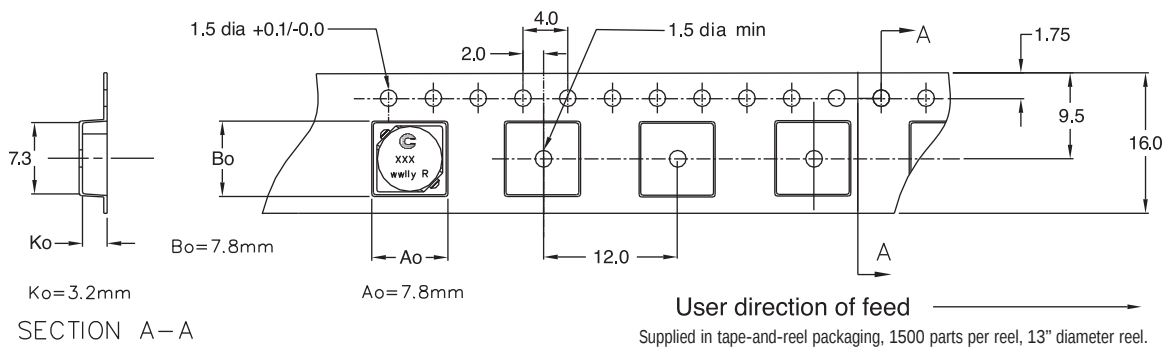


Core Loss

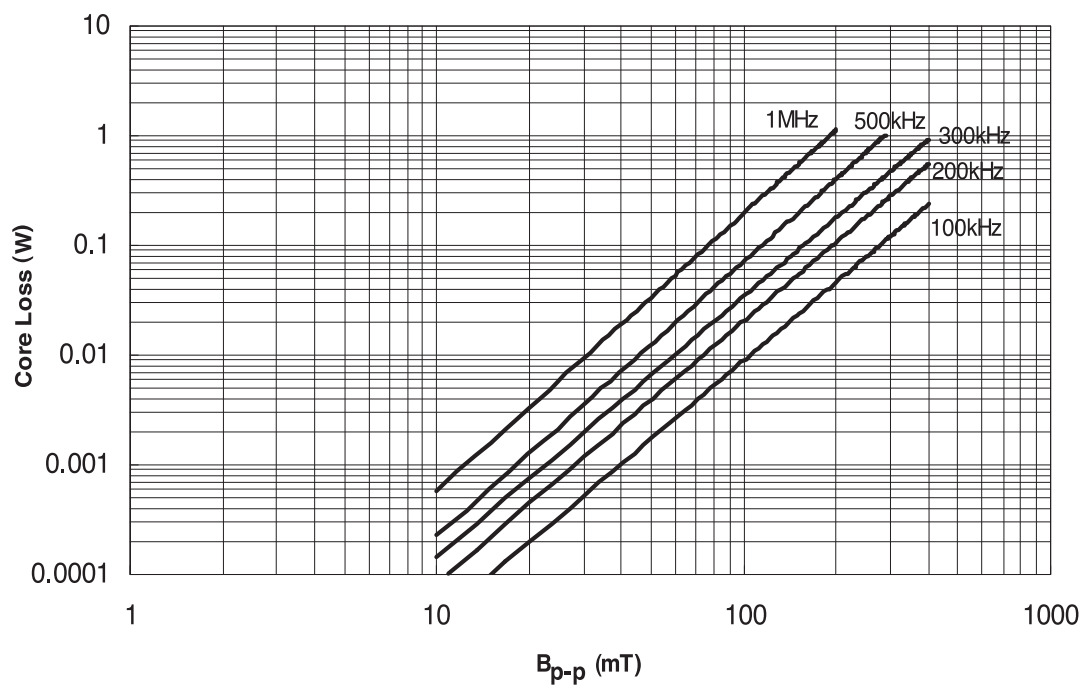

Temperature Rise vs. Loss

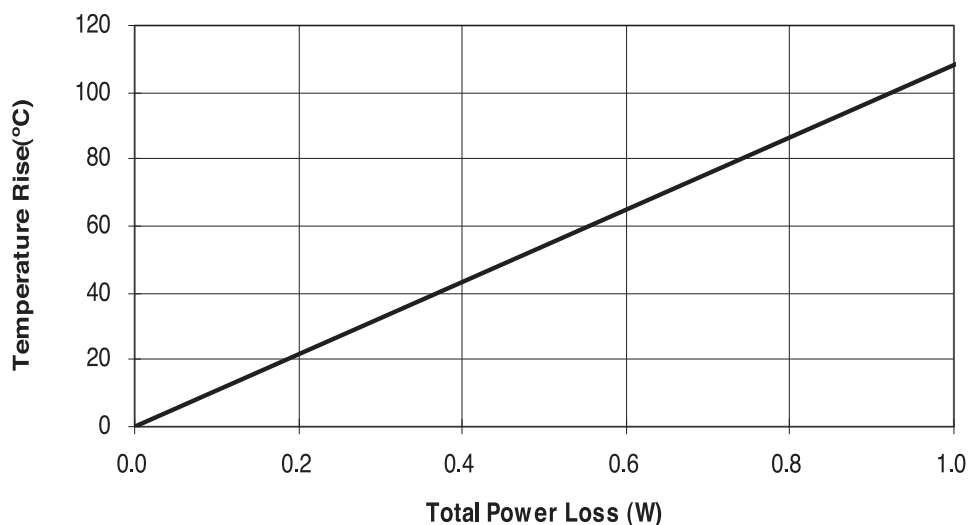

Inductance Characteristics

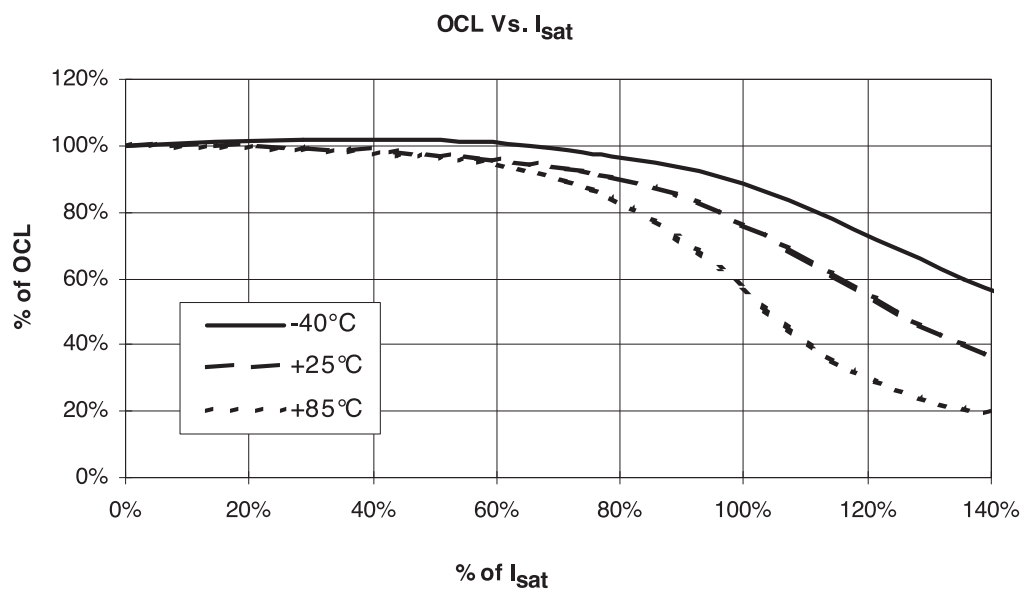

North America

Cooper Electronic Technologies
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Cooper Electronic Technologies
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Electronic Technologies
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com