
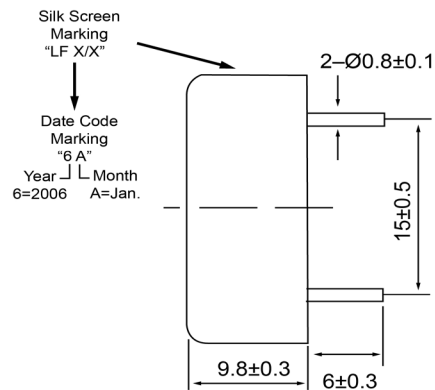


SIDE VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	4,800	(Hz)									
Rated Voltage	12	(V)									
SPL @ 10cm	85	(dBA)									
Capacitance	15,000	(pF)									
Mount Type	Thru-hole										
Voltage Range	1 ~ 40	(V)									
Max Rated Current	7	(mA)									
Housing Material	PBT										
Operating Temperature	-20 ~ +60	°C									
Storage Temperature	-20 ~ +60	°C									
Weight	3.5	(g)									
			 DB UNLIMITED	Drawn by			Date	Checked by	Date	Approved by	Date
				A.B.			10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Piezo Transducer			TP234812-1					

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com