

EVERLIGHT

EVERLIGHT ELECTRONICS CO.,LTD.

DATA SHEET

MODEL NO : 1224USOC/S530-A3**DATE : 2000/3/10****DEPARTMENT : CHR&D1****REVISION : 1**

RECEIVED			
☒ MASS PRODUCTION			
☐ PRELIMINARY			
☐ CUSTOMER DESIGN			
DEVICE NUMBER :		CDLE-122-071	
PAGE :		4	
CUSTOMER	DESIGNER	CHECKER	APPROVER
		/	

1		2000/3/10
REV	DESCRIPTION	RELEASE DATE

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan
Bonded Processing Zone Pan Yu, Guang Zhou, China
TEL : (020)84860913,84860914
FAX : (020)84860600
[http : //www.everlight.com](http://www.everlight.com)



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-071

REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224USOC/S530-A3

ECN :

Page: 1/4

■ Features :

- Choice of various viewing angles
- Available on tape and reel
- Reliable and robust


■ Descriptions :

- The series is specially designed for applications require higher brightness than that achievable with standard lamp.
- The LED lamp are available with different colors, intensities, epoxy colors, etc.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

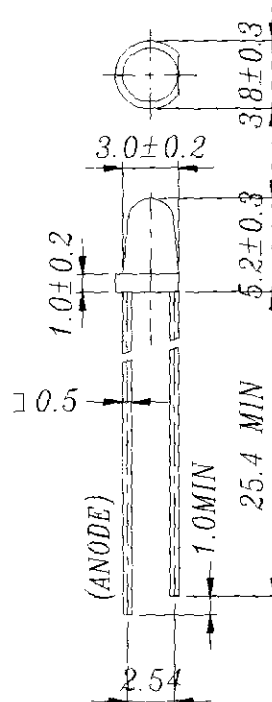

■ NOTES :

- 1.All dimensions are in millimeters.
- 2.Epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
1224USOC/S530-A3	AlGaInP	Super Sunset Orange	Water Clear

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan

Bonded Pricessing Zone Pan Yu, Guang Zhou, China

TEL : (020)84860913,84860914

FAX : (020)84860600

http : [//www.everlight.com](http://www.everlight.com)



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-071 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224USOC/S530-A3 ECN : Page: 2/4

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA
Reverse Voltage	Vr	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	188.00	295.00	/	mcd	If= 20 mA
Viewing Angle	2θ 1/2	/	25	/	deg	If= 20 mA
Peak Wavelength	λ p	/	621	/	nm	If= 20 mA
Dominant Wavelength	λ d	/	615	/	nm	If= 20 mA
Spectrum Radiation Bandwidth	△ λ	/	18	/	nm	If= 20 mA
Forward Voltage	Vf	1.70	2.00	2.40	V	If= 20 mA
Reverse Current	Ir	/	/	10	μ A	Vr= 5 V




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-071 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224USOC/S530-A3 ECN : Page: 3/4

■ Typical Electro-Optical Characteristic Curves:

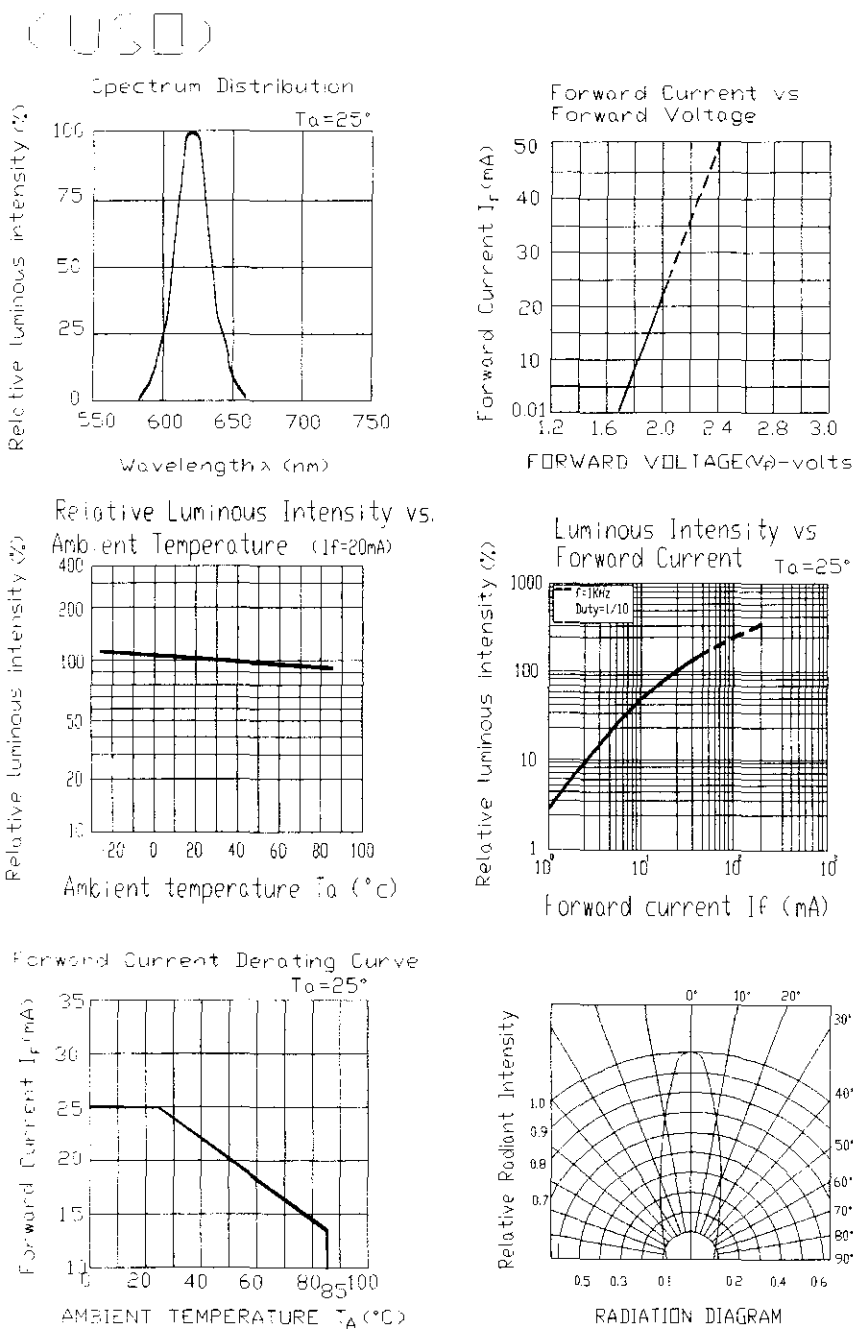



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-071 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224USOC/S530-A3 ECN : Page: 4/4

■ Reliability test item and conditions:

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 Pcs	0/1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com