


# Slotted Optical Switch OPB857Z



## Features:

- Three wires for economy in electrical connection
- Water resistant, no optical openings in upper plastic body
- Internal narrow aperture for high motion resolution

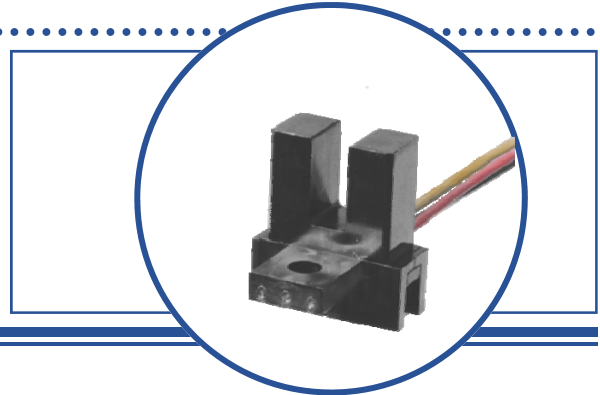

## Description:

OPB857Z is a non-contact optical switch with a NPN silicon phototransistor and infrared Light Emitting Diode (LED) which are mounted on opposite sides of a 0.150" ( 3.8 mm) wide slot.


The device upper body is a single molded piece IR transparent plastic that is tinted to reduce ambient light interference and offers water resistance as well as dirt/dust protection. The phototransistor has a internal aperture that offers good optical resolution. LED emissions are near-infrared (850 – 940nm).

Custom electrical, wire and cabling services are available.

Contact your local representative or OPTEK for more information. Compliant to EU RoHS Directive 2002/95/EC.

## Applications:

- Non-contact object sensing    Assembly line automation    Machine automation    Equipment security    Machine safety

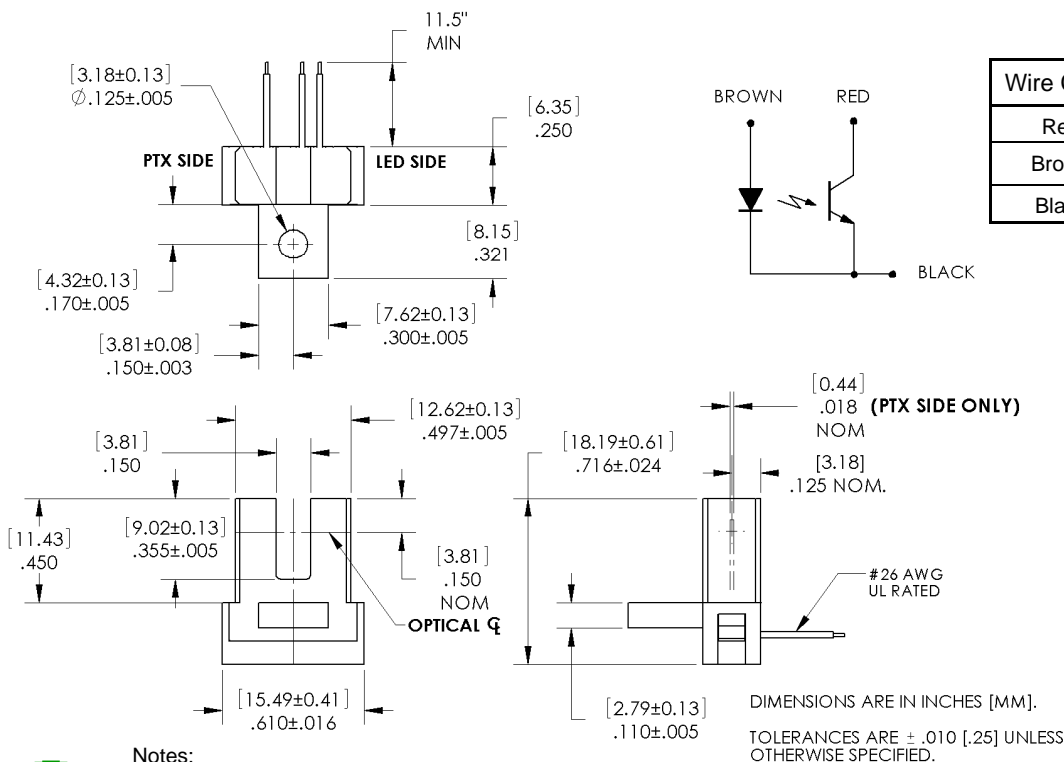

### Notes:

- (1) Wire is 26AWG, UL Rated PVC insulation.
- (2) Ideal torque for bolt or screw 0.45 to 0.68 Nm ( 4 to 6 Lb-in ).
- (3) When using a thread lock compound, ND Industries "ND Vibra-Tite® Formula 3" will avoid stress cracking plastic.
- (4) Plastic is soluble in chlorinated hydrocarbons and ketones. Methanol or isopropanol are recommended as cleaning agents.



RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

### Absolute Maximum Ratings

Storage & Operating Temperature Range	-40°C to +80° C
<b>Input Diode</b>	
Input Diode Power Dissipation	100 mW <sup>(5)</sup>
Input Diode Forward D.C. Current, T <sub>A</sub> = 25°C	50 mA <sup>(5)</sup>
Input Diode Peak Forward Pulse Current, T <sub>A</sub> = 25°C (1µs pulse width, 300pps)	1 A
Input Diode Reverse D.C. Voltage, T <sub>A</sub> = 25°C	2 V
<b>Phototransistor</b>	
Power Dissipation	100 mW <sup>(5)</sup>
Collector - Emitter Voltage	30V
Emitter - Collector Voltage	5.0V

### Electrical Characteristics ( T<sub>A</sub> = 25°C )

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

#### Input Diode (see OP140 or OP240 for additional information)

V <sub>F</sub>	Forward Voltage	-	-	1.70	V	I <sub>F</sub> = 20 mA
I <sub>R</sub>	Reverse Current	-	-	100	µA	V <sub>R</sub> = 2 V

#### Output Phototransistor (see OP550 for additional information)

V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	30	-	-	V	I <sub>C</sub> = 1 mA, E <sub>E</sub> = 0
V <sub>(BR)ECO</sub>	Emitter-Collector Breakdown Voltage	5.0	-	-	V	I <sub>E</sub> = 100 µA, E <sub>E</sub> = 0
I <sub>CEO</sub>	Collector Dark Current	-	-	100	nA	V <sub>CE</sub> = 10 V, I <sub>F</sub> = 0, E <sub>E</sub> = 0





#### Coupled

V <sub>CE(SAT)</sub>	Collector-Emitter Saturation Voltage	-	-	0.40	V	I <sub>C</sub> = 1.50 mA, I <sub>F</sub> = 20 mA
I <sub>C(ON)</sub>	On-State Collector Current	1.5	-	17.0	mA	V <sub>CE</sub> = 10 V, I <sub>F</sub> = 20 mA

#### Notes:

- (5) Derate linearly 1.67 mW/°C above 25 ° C.
- (6) All parameters tested using pulse techniques.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

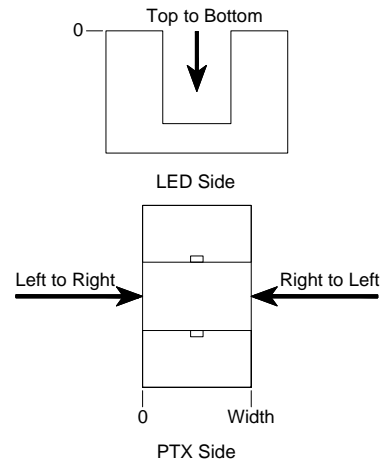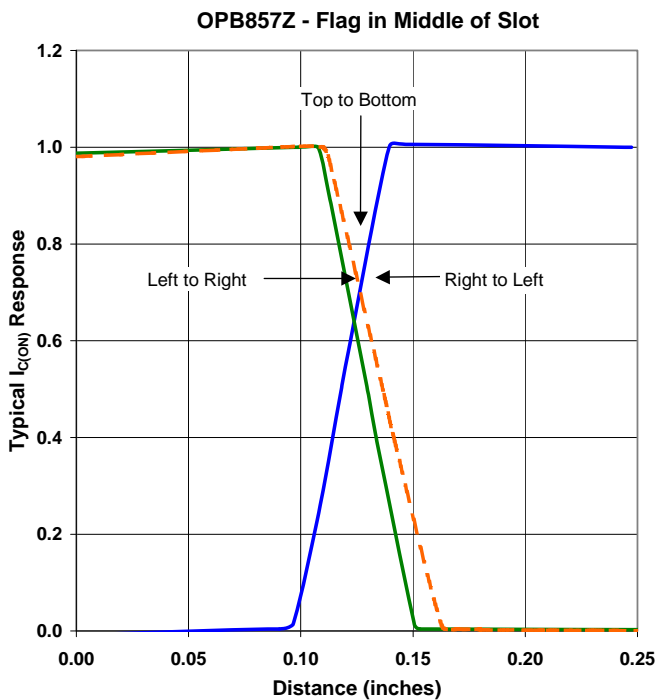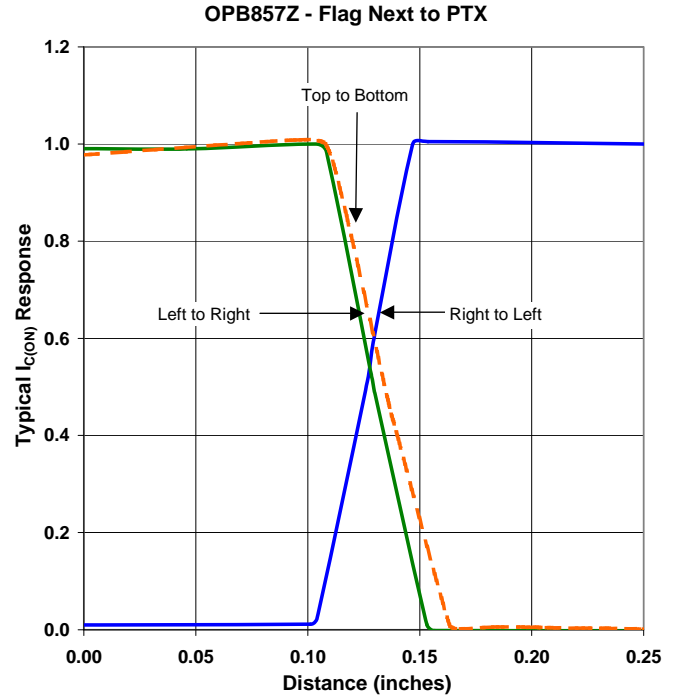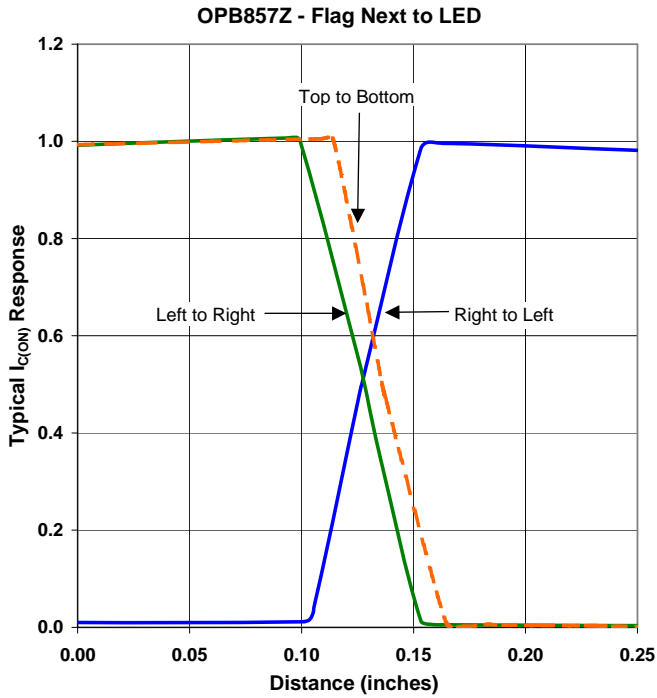

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)