



15W Constant Current LED Driver PDA015A-350C Power Supply for Indoor Lighting



Features

- RoHS Compliant
- IP20 Rated
- Constant Current
- Brownout/Brownout Recovery
- Limited Power Source
- OVP, OCP, Short/Open Circuit Protection
- Power Factor Correction
- Wide Temperature Range

Applications

- Indoor Lighting
- Architectural Lighting

Safety Approvals

- CE
- CCC
- C-Tick
- TUV
- CQC
- SAA

Mechanical Characteristics

- Length: 132mm (5.2in)
- Width: 40mm (1.6in)
- Height: 21mm (0.8in)
- Weight: 120g (4.2oz)

Output Specifications

Model	DC Output Voltage Range			Output Current Range			Max Power
	Min.	Typ.	Max.	Min.	Typ.	Max.	
PDA015A-350C	17.5V	-	42V	300mA	350mA	400mA	16.8W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage**

211 to 264VAC

Nominal AC Input Voltage

220 to 240VAC

Leakage Current

0.5mA maximum

Maximum Input Current $\leq 0.3A$ at 230VAC**AC Inrush Current** $\leq 30A$ at 230VAC, full load**OUTPUT:****Total Output Power**

16.8W maximum

Efficiency

77% minimum

Power Factor ≥ 0.9 at full load, nominal AC input**Ripple** $< 1A$ **ENVIRONMENTAL:**

Operating Temperature -20 to +50°C

Storage Temperature -40 to +85°C

Operating Humidity 10 to 95%

Storage Humidity 05 to 95%

Warranty

3 Years

Lifetime

20K hours minimum

EMC

EN55015, FCC 47 Part 18, EN55022 Class B

Immunity

IEC61000-4-2

IEC61000-4-5

IEC61000-3-2 Class C

IEC61000-3-3

Isolation Test

Primary to secondary: 3950VAC for 1 minute, 10mA

Insulation ResistancePrimary to secondary: $> 5M$ OHM 500VDC, 1 minute**FEATURES:****Input Current Protection**

The input power line is fused with a 1.6A fuse

Short Circuit

Driver will withstand short circuit across outputs without damage

Output Overvoltage Protection

Output is protected (latched) from over voltage

Open Circuit Protection

If circuit is open, output will not be damaged at nominal AC input conditions

Input / Output Connection

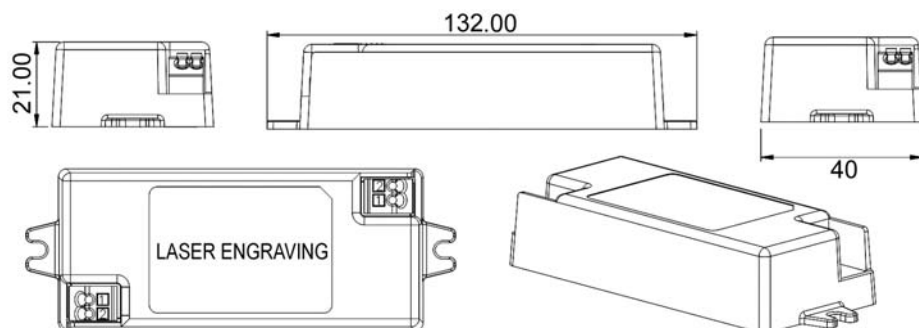
2-pin terminal block

Input / Output Wires (Solid or Stranded)

Position	Terminal Color	Specification
Line	Brown	AWG16~18
Neutral	Blue	AWG16~18
Vout+	Red	AWG16~18
Vout-	Black	AWG16~18

Ingression Protection

IP20

Dimension Diagram Unit:mm

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com