



IR Emitter and Detector

Product Data Sheet

LTR-5888DH

Spec No.: DS-50-95-0010

Effective Date: 05/20/2000

Revision: C

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

LITE-ON Technology Corp. / Optoelectronics

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.


Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

FEATURES

- * WIDE RANGE OF COLLECTOR CURRENT
- * HIGH SENSITIVITY
- * FAST SWITCHING TIME
- * THE LTR-5888DH IS A SPECIAL DARK GREEN PLASTIC PACKAGE THAT CUT THE VISIBLE FOR THE DETECTORS OF INFRARED APPLICATIONS

PACKAGE DIMENSIONS

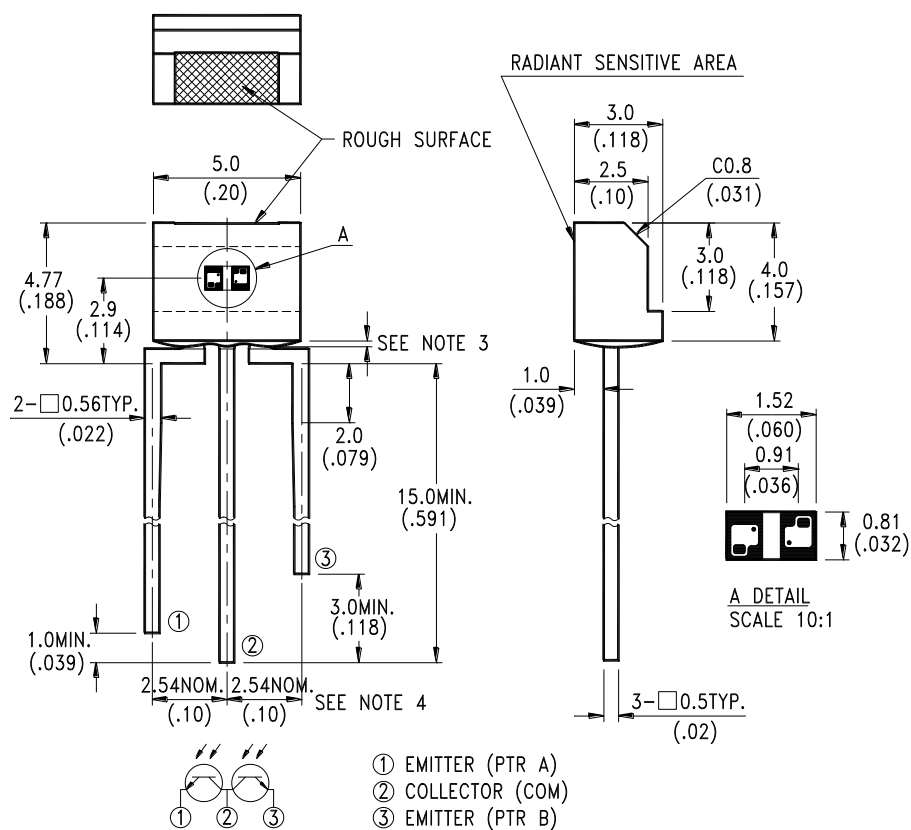

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

**ABSOLUTE MAXIMUM RATINGS AT T_A=25°C**

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation	100	mW
Collector-Emitter Voltage	30	V
Emitter-Collector Voltage	5	V
Operating Temperature Range	-40°C to + 85°C	
Storage Temperature Range	-55°C to + 100°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL / OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX	UNIT	TEST CONDITION	BIN NO.	Color Marking
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C = 1mA$ $E_e = 0mW/cm^2$		
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5			V	$I_E = 100 \mu A$ $E_e = 0mW/cm^2$		
Collector Emitter Saturation Voltage	$V_{CE(SAT)}$		0.1	0.4	V	$I_C = 100 \mu A$ $E_e = 1mW/cm^2$		
Rise Time	T_r		15		μs	$V_{CC} = 5V$ $I_C = 1mA$ $R_L = 1K\Omega$		
Fall Time	T_f		18		μs			
Collector Dark Current	I_{CEO}		0.1	100	nA	$V_{CE} = 10V$ $E_e = 0mW/cm^2$		
Collector Current Ratio Of 2 Phototransistor	R	0.8	1.0	1.25		$I_{C(ON)(a)}/I_{C(ON)(b)}$		
On State Collector Current Range Setting of LITE-ON Production $[I_{C(ON)(a)} + I_{C(ON)(b)}] / 2$	$I_{C(ON)}$	0.20		0.26	mA	$V_{CE} = 5V$ $E_e = 1mW/cm^2$	BIN A	Red
		0.26		0.32			BIN B	Black
		0.32		0.38			BIN C	Green
		0.38		0.46			BIN D	Blue
		0.46		0.52			BIN E	White
		0.52		0.58			BIN F	Purple
		0.58		0.64			BIN G	Yellow
		0.64		0.70			BIN H	Orange
On State Collector Current Range $[I_{C(ON)(a)} + I_{C(ON)(b)}] / 2$	$I_{C(ON)}$	0.16		0.31	mA	$V_{CE} = 5V$ $E_e = 1mW/cm^2$	BIN A	Red
		0.20		0.38			BIN B	Black
		0.26		0.46			BIN C	Green
		0.30		0.55			BIN D	Blue
		0.36		0.62			BIN E	White
		0.42		0.70			BIN F	Purple
		0.46		0.76			BIN G	Yellow
		0.51		0.84			BIN H	Orange

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

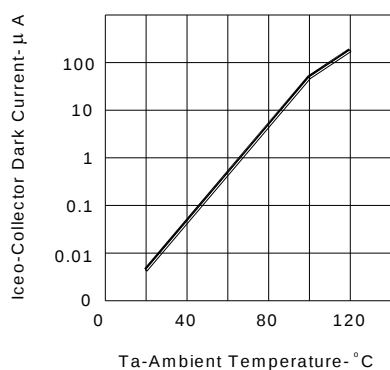


FIG.1 COLLECTOR DARK CURRENT VS AMBIENT TEMPERATURE

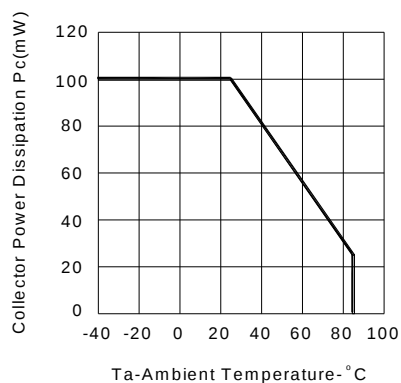


FIG.2 COLLECTOR POWER DISSIPATION VS AMBIENT TEMPERATURE

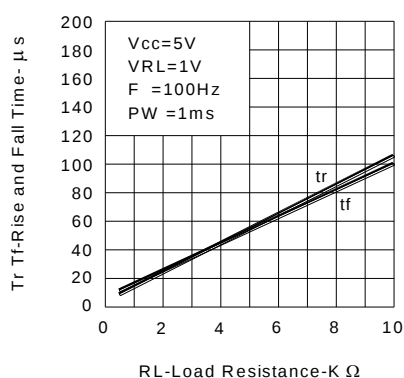


FIG.3 RISE AND FALL TIME VS LOAD RESISTANCE

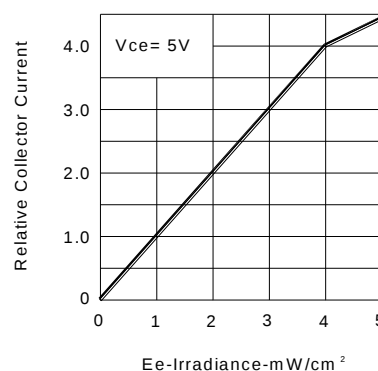


FIG.4 RELATIVE COLLECTOR CURRENT VS IRRADIANCE

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com