
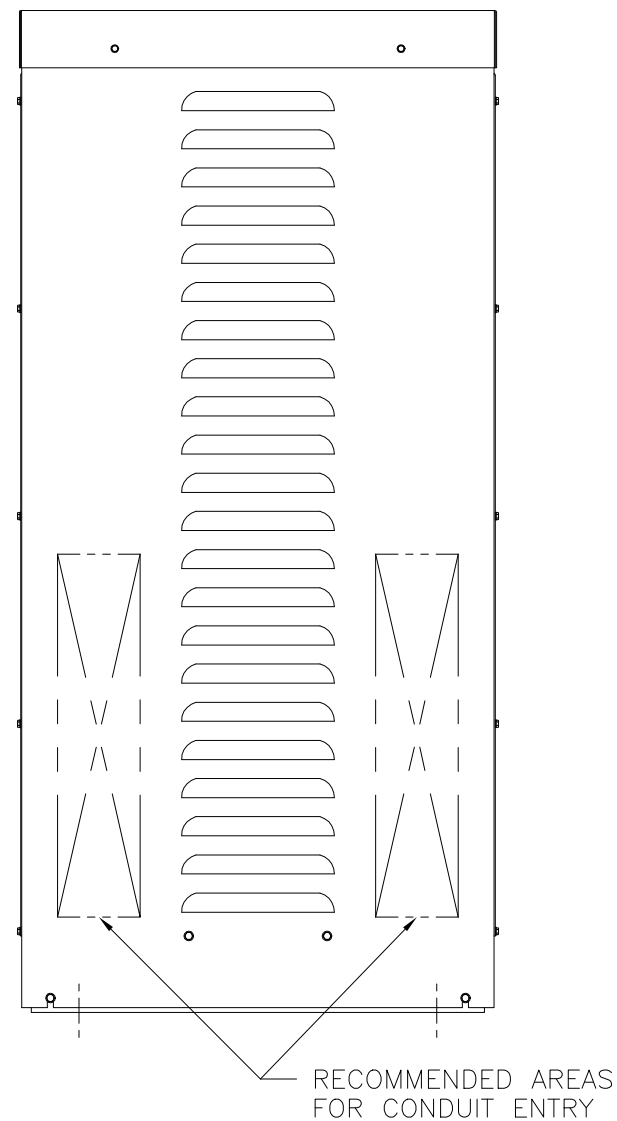


V.D. = VOLTAGE DOUBLER.	SPEED (SECONDS)	MODEL NUMBER
	15	15M5021E-6Y
	30	30M5021E-6Y
	60	60M5021E-6Y

SPECIFICATIONS											
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP				
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT			
				MAX. AMPS	MAX. KVA						
THREE PHASE WYE	480	50/60	0-480	56	46.6	CW	4-4-4	B-B-B			
		60	0-560	56	54.3	CW	2-2-2	B-B-B			
	240	60	0-560	56-24 V.D.	23.5 ++	CW	5-5-5	B-B-B			
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT .XX .0001-.12 .0009 .03 1° 1-1/2°		UNITS IN [mm]		TITLE: SPEC CONTROL DRAWING MOTORIZED VARIABLE XFMR TYPE: M5021E-6Y			 A Comprehensive Division of American Company 301 Gaults Boulevard Dayton, Ohio 45403 USA				
MATERIAL :		ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY S.A. SMITH		DATE 11/15/94		FIRST USED ON M5021E-6Y			
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				CHECKER		DATE		WEIGHT APPROX.			
				ENGINEER		DATE		SCALE 2=1		SHEET 1 OF 1	
				DO NOT SCALE DWG.		CASE CODE 83008		DWG. SIZE D		DWG. NO. 031-8380	

Authorized Distribution Brand :

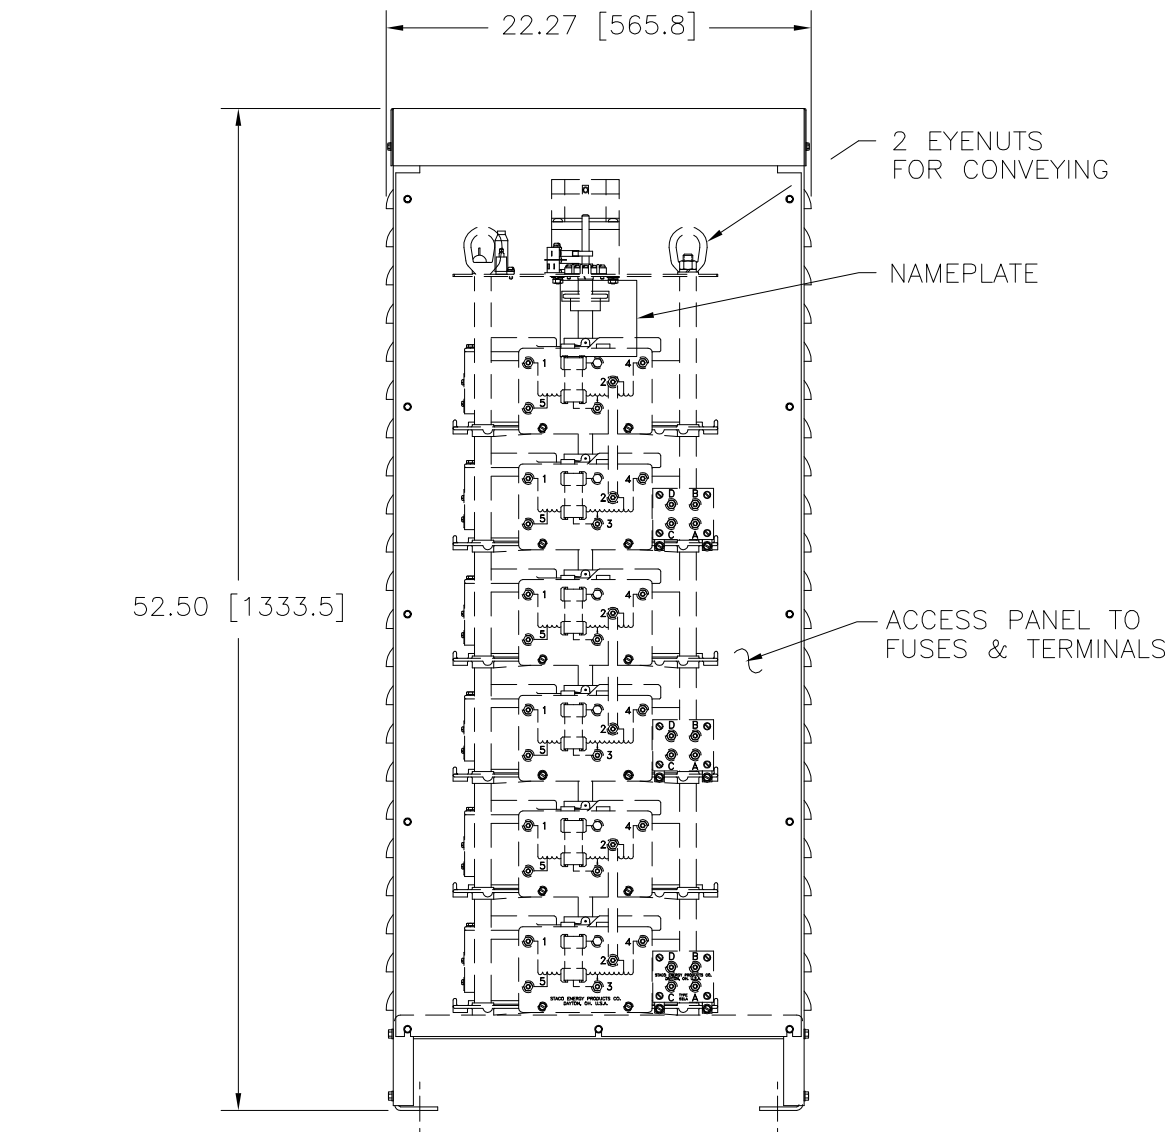

Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com