

59170 Moulded MDSR-10 Switch



Features

- 2 part magnetically operated proximity sensor
- Leaded and Gull Wing options
- Tape and reel option (consult Hamlin)
- Stand-offs to allow board washing
- Customer defined sensitivity
- Solder reflow capable


Benefits

- Suitable for pick and place
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

Applications

- Position and limit sensing
- Security system switch
- Door switch

DIMENSIONS (in) mm

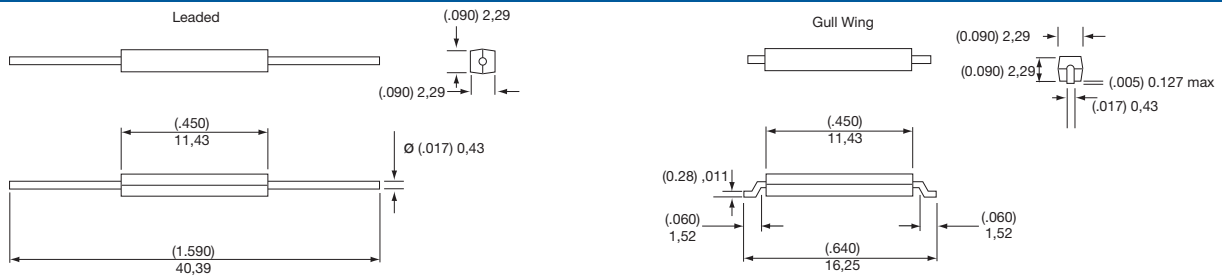

SPECIFICATIONS


TABLE 1			Normally Open
Contact Type			I
Switch Type			
Power	Switching	Watt - max.	10
	Breakdown	Vdc - max.	200
Voltage	Switching	Vdc - max.	250
	Breakdown	Vdc - min.	0.5
Current	Switching	A - max.	0.8
	Carry	A - max.	0.1
Resistance	Contact, Initial	Ω - max.	10 ⁰
	Insulation	Ω - min.	0.3
Capacitance	Contact	pF - typ.	-40 to +125
	Operating	°C	-65 to +125
Temperature	Storage	°C	1.0
	Operate	ms - max.	0.5
Time	Release	ms - max.	100
	Shock	11ms 1/2 sine	G - max.
Shock		G - max.	30
	Vibration	50-2000 Hz	G - max.

CUSTOMER OPTIONS - Sensitivity and Termination Specification

TABLE 2						
Sensitivity Options:-						
Activate Distances are approximate using Hamlin 57045 actuator as illustrated Switch AT before modification						
Select Option	S	T	U			
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm
I Normally Open	10-15	(.295) 7,5	15-20	(.256) 6,5	20-25	(.197) 5,0

TABLE 3	
Termination and Packing Options:-	
SELECT OPTION	DESCRIPTION
A	Leaded
C	Gull Wing bulk packed
D	Gull Wing taped and reel

ORDERING INFORMATION

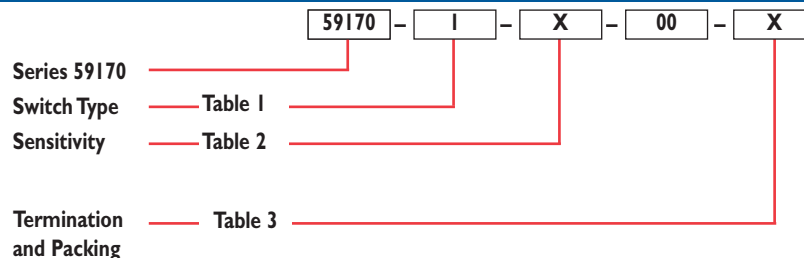

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com
Hamletrol France Tel: +33(0) 1 6047 3000 • Fax: +33(0) 1 6015 9136 • Email: sales.fr@hamlin.com

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com