

# Multi-Port, 10/100 Mbps Switching Standalone Media Converter

## AccessConverter



### PRODUCT FEATURES

- Low cost, high flexibility — same small unit performs media conversion and switching functions
- Offers three downlink connections
- Compact size allows for flexible installation configurations
- Unmanaged

Terminating a fiber run while using various local, copper-based devices such as PCs, printers, VoIP, etc. is essential for the success of Fiber-to-the Business, Curb and other FTTx projects. Remote locations have similar configuration demands. Connecting the multiple copper devices to the fiber, however, typically requires the use of both a media converter and a switch— two pieces of equipment to purchase and two pieces of equipment to monitor and maintain. The AccessConverter streamlines FTTx projects as well as the connection of remote locations as a multi-port, switching media converter.

Best of all, one compact AccessConverter module reduces the amount of required equipment while providing all the features of a switch (store and forward switching mechanics, MAC address learning, protection against broadcast storms, flow control, etc.) and performing the electrical-to-optical conversion. In addition, the unit's small size and wall-mount bracket (included) allow you to install AccessConverter virtually anywhere, including inside a network interface device (NID).

### Requiring no configuration, the AccessConverter offers plug-and-play operation:

- Each copper port auto-senses the connected device's speed and duplex mode (10 Mbps or 100 Mbps and HDX or FDX) and includes AutoCross, a feature which automatically selects between a crossover workstation (MDIX) or pass-through (MDI) connection depending on the connected device
- The fiber port always operates at 100 Mbps FDX, and supports distances up to 80 km; single-strand fiber versions are available.

### ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET CONNECTOR
<b>AccessConverter</b>					
852-10140			100 m	4	RJ45
852-10150	MM850-ST	1	2 km	3	RJ45
852-10151	MM850-SC	1	2 km	3	RJ45
852-10141	MM1300-ST	1	5 km	3	RJ45
852-10142	MM1300-SC	1	5 km	3	RJ45
852-10141-MT	MM1300-MT	1	5 km	3	RJ45
852-10143	SM1310/PLUS-ST	1	40 km	3	RJ45
852-10144	SM1310/PLUS-SC	1	40 km	3	RJ45
852-10145	SM1310/LONG-ST	1	80 km	3	RJ45
852-10146	SM1310/LONG-SC	1	80 km	3	RJ45
852-10147	SM1550/LONG-SC	1	80 km	3	RJ45
<b>SINGLE-STRAND FIBER *</b>					
852-10153	SSFX-SM1310-SC	1	20 km	3	RJ45
852-10154	SSFX-SM1550-SC	1	20 km	3	RJ45
852-10155	SSFX-SM1310/PLUS-SC	1	40 km	3	RJ45
852-10156	SSFX-SM1550/PLUS-SC	1	40 km	3	RJ45
852-10157	SSFX-SM1310/LONG-SC	1	60 km	3	RJ45
852-10158	SSFX-SM1550/LONG-SC	1	60 km	3	RJ45

\* These products have single-strand fiber technology. Deploy in pairs or connect another compatible B&B IMC LLC single-strand fiber product.

# Multi-Port, 10/100 Mbps Switching Standalone Media Converter

AccessConverter



## SPECIFICATIONS

### TECHNICAL

Auto Negotiation of speed and duplex (HDX/FDX) on copper ports  
 Layer 2 packet switching, store and forward operation  
 Forwarding rate: 14,881pps for 10 Mbps; 148,810pps for 100 Mbps  
 1024 MAC address learning  
 MTU: Supports over-sized packets up to 1536 bytes  
 Full wire speed on all ports  
 Broadcast storm protection  
 AutoCross for MDI/MDIX  
 LinkLoss and FiberAlert  
 Auto Negotiation  
 Diagnostic LEDs  
 50/125µm or 62.5/125µm multi-mode fiber  
 9/125µm single-mode fiber  
 Single-strand fiber  
 All copper version also available (TX/3 + TX)



IEEE 802.3 10Base-T  
 IEEE 802.3u 100Base-TX  
 IEEE 802.3u 100Base-FX  
 IEEE 802.3x Flow Control

### CONNECTORS

RJ45, ST, SC and MT-RJ  
 Supports Half- and Full-Duplex operation

## MECHANICAL DIAGRAM

(dimensions in inches & millimeters)

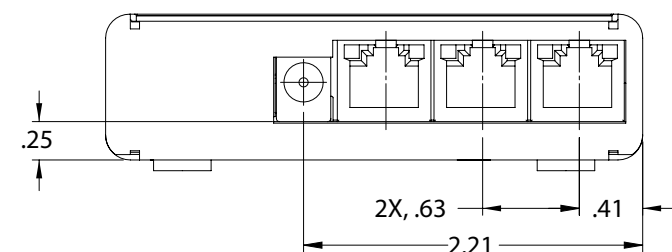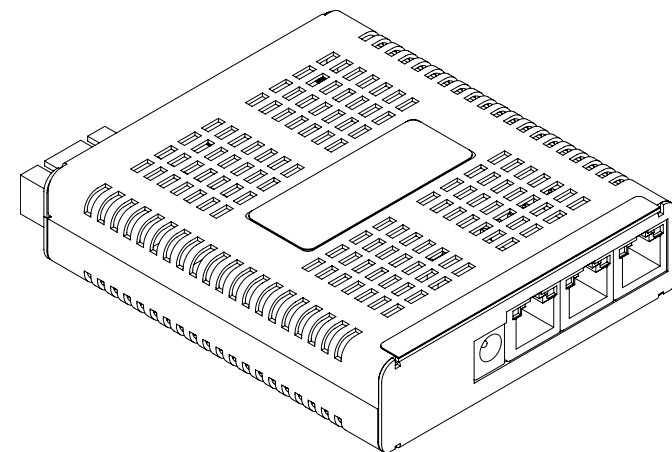

### MECHANICAL

Dimensions 0.92"H x 3.50"W x 4.38"D  
 (2.34 x 8.89 x 11.13 cm)  
 Shipping Weight 1.1 lbs. (0.50 kg)

### POWER RATING



5V DC, 1A

### ENVIRONMENTAL

Operating Temperature +32° to +122° F (0° to +50° C)  
 Storage Temperature: -13° to +158°F (-25° to +70° C)  
 Operating Humidity 5% to 95% (non-condensing)

### REGULATORY APPROVALS

FCC Class B  
 UL/cUL, CSA, CE

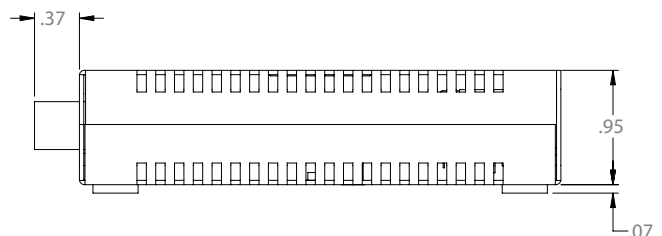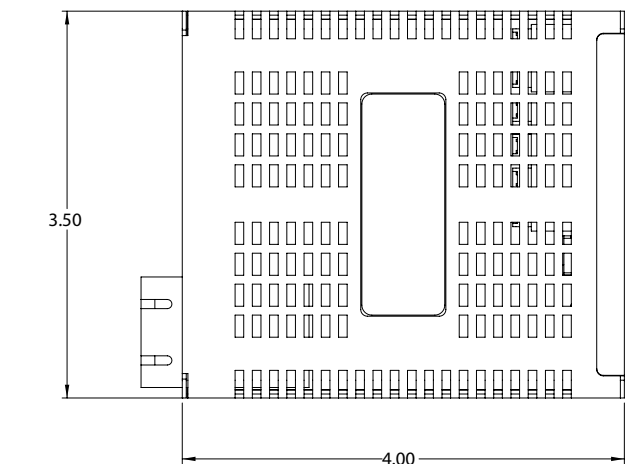

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)