


Avionics Pulsed Power Transistor 50W, 960-1215 MHz, 10μs Pulse, 10% Duty

Released, 05 Sep 07

Features

- NPN silicon microwave power transistors
- Common base configuration
- Broadband Class C operation
- High efficiency inter-digitized geometry
- Diffused emitter ballasting resistors
- Gold metallization system
- Internal input and output impedance matching
- Hermetic metal/ceramic package
- RoHS Compliant

Outline Drawing

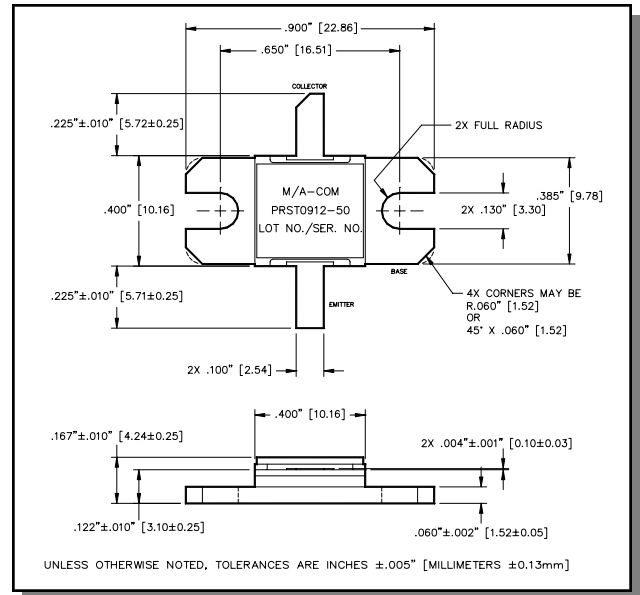

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	5.3	A
Power Dissipation @ +25°C	P_{TOT}	220	kW
Storage Temperature	T_{STG}	-65 to +200	°C
Junction Temperature	T_J	200	°C

Electrical Specifications: $T_C = 25 \pm 5^\circ\text{C}$ (Room Ambient)

Parameter	Test Conditions	Frequency	Symbol	Min	Max	Units
Collector-Emitter Breakdown Voltage	$I_C = 15\text{mA}$		BV_{CES}	65	-	V
Collector-Emitter Leakage Current	$V_{CE} = 40\text{V}$		I_{CES}	-	2.0	mA
Thermal Resistance	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	$R_{TH(JC)}$	-	0.80	°C/W
Output Power	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	P_O	50	-	W
Power Gain	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	G_P	9.1	-	dB
Collector Efficiency	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	η_C	40	-	%
Input Return Loss	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	RL	-	-9	dB
Load Mismatch Stability	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960\text{ MHz}$	VSWR-T	-	10:1	-
Load Mismatch Tolerance	$V_{CC} = 50\text{V}$, $P_{in} = 6.2\text{W}$	$F = 960, 1090, 1215\text{ MHz}$	VSWR-S	-	1.5:1	-

Avionics Pulsed Power Transistor
50W, 960-1215 MHz, 10 μ s Pulse, 10% Duty


Released, 05 Sep 07

Typical RF Performance


Freq. (MHz)	Pin (W)	Pout (W)	Gain (dB)	Δ Gain (dB)	Ic (A)	Eff (%)	RL (dB)	VSWR-S (1.5:1)	VSWR-T (10:1)	P1dB Overdrive	
										Pout	Δ Po
960	6.2	65.9	10.25	-	2.66	49.6	-22.2	S	P	73.4	0.48
1090	6.2	61.9	9.98	-	2.58	48.0	-15.2	S	-	68.7	0.45
1215	6.2	64.6	10.16	0.35	2.50	51.6	-15.9	S	-	74.8	0.63

Note: Δ Po(dB) is the difference between Pout at 1dB overdrive and Pout at Pin = 6.2W.

Gain vs. Frequency

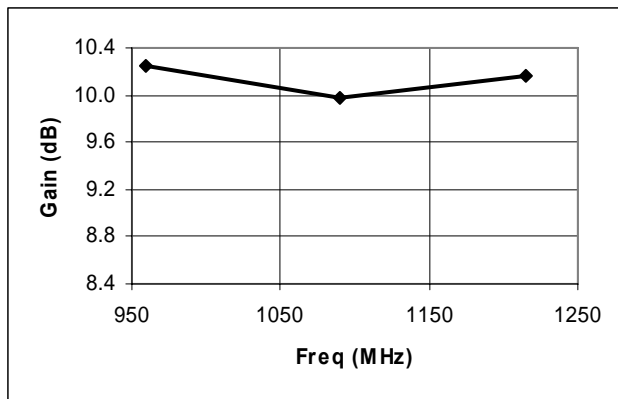


Collector Efficiency vs. Frequency

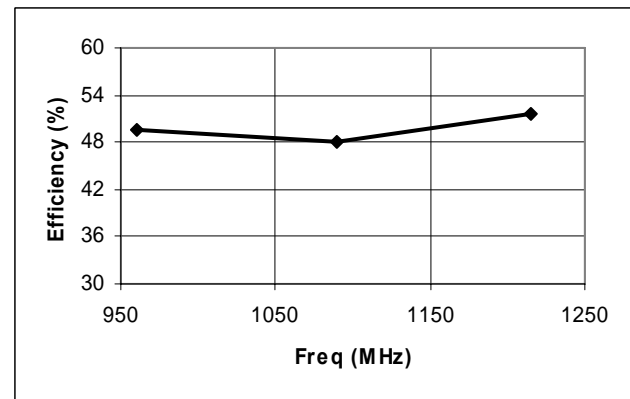

Avionics Pulsed Power Transistor
50W, 960-1215 MHz, 10 μ s Pulse, 10% Duty


Released, 05 Sep 07

RF Power Transfer Curve (Output Power Vs. Input Power)

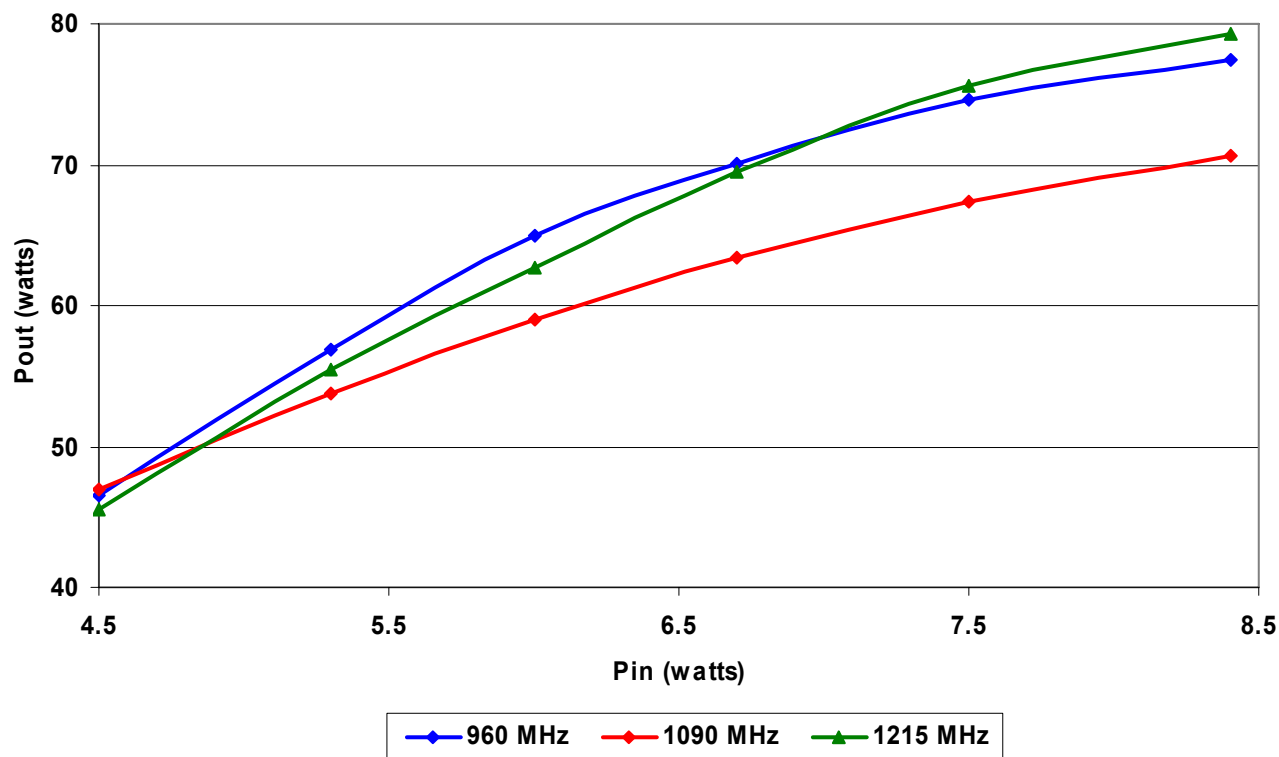

Broadband Test Fixture Impedance

F (MHz)	Z _{IF} (Ω)	Z _{OF} (Ω)
960	3.5 - j7.5	12.0 - j7.8
1030	3.8 - j7.0	11.1 - j6.4
1090	3.9 - j6.8	10.6 - j5.1
1150	3.9 - j6.8	10.8 - j3.8
1215	3.6 - j7.0	11.1 - j3.2

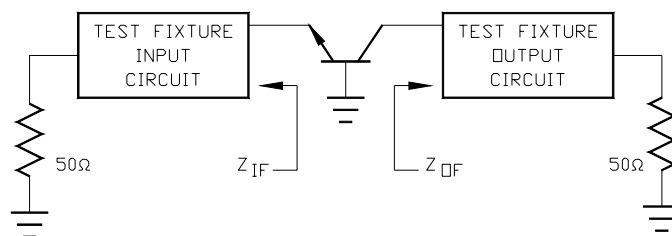


Avionics Pulsed Power Transistor


50W, 960-1215 MHz, 10 μ s Pulse, 10% Duty

Released, 05 Sep 07

Test Fixture Circuit Dimensions

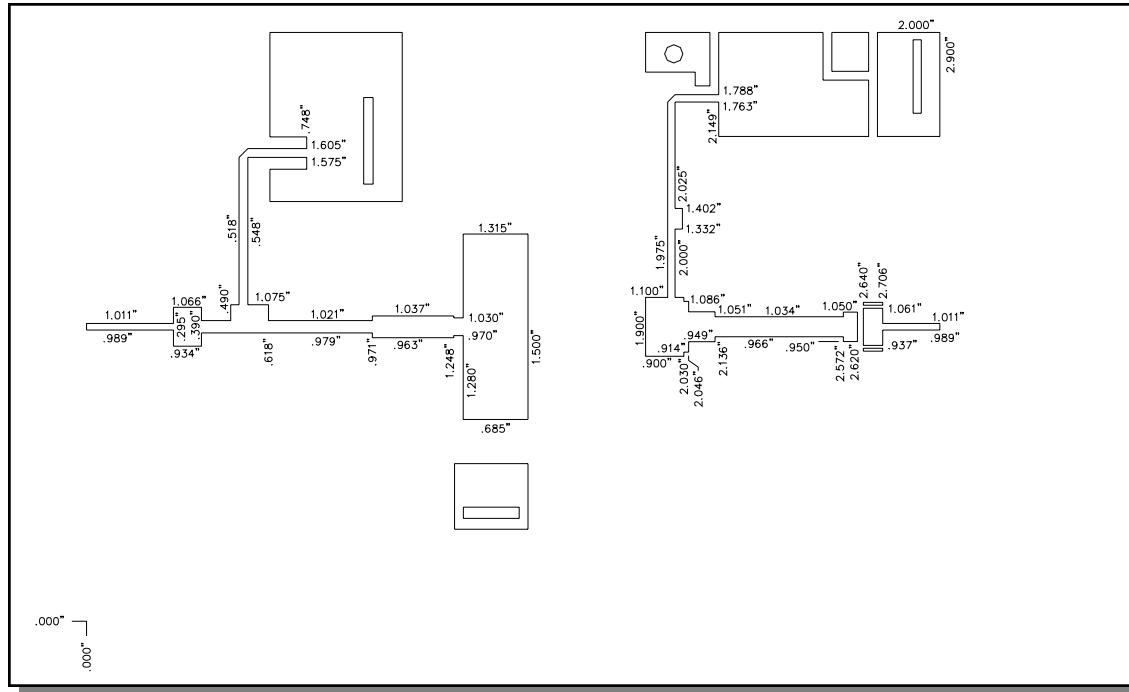

Test Fixture Assembly

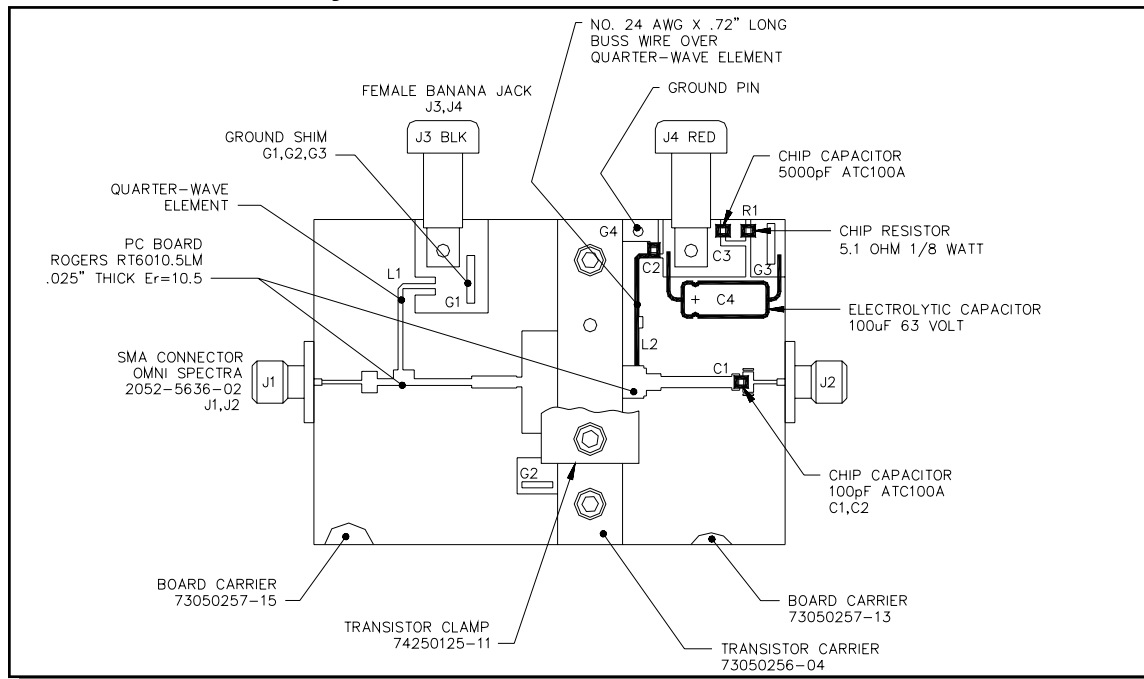

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com