
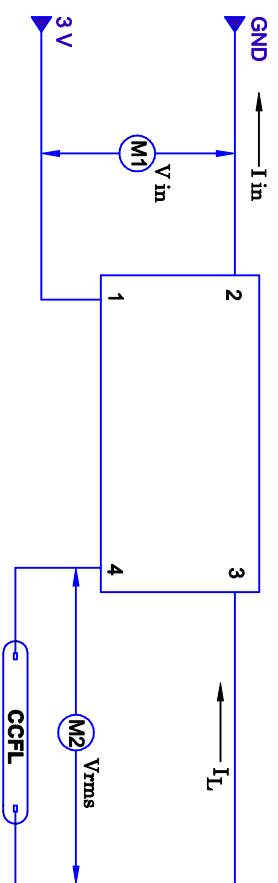
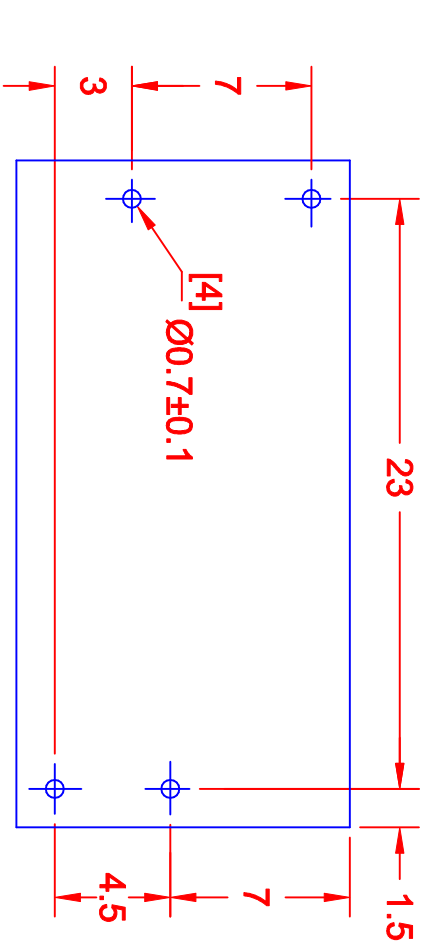


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/20/99
A	WIRE DIAGRAM CHNGS	10/31/00
B	CONVERT TO CAD	6/8/01
C	ADD HOLE DIA.	3/15/02

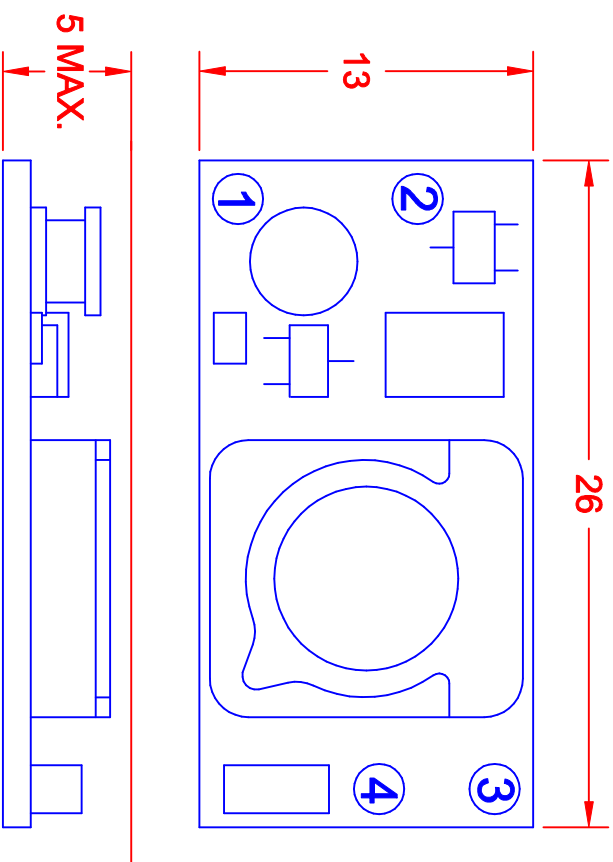

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	2.5	3.0	3.5
INPUT CURRENT: (mA)	350	400	450
OUTPUT VOLTAGE: (Vrms)	600	650	700
OUTPUT CURRENT (maRms)	4.0	4.5	5.0
OUTPUT FREQUENCY: (kHz)	70	80	90
OPERATING TEMP: (CELSIUS)	0	25	50

BOARD PIN #	INPUT	TOLERANCE
1	+V (V in)	L < 20 ±0.2
2	V (GND)	20 ≤ L < 50 ±0.3
3	OUT GND	50 ≤ L < 100 ±0.4
4	V OUT	100 ≤ L ±0.5

METRIC	DIMENSIONS ARE IN MILLIMETERS	TITLE
THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	JKL COMPONENTS CORPORATION
1 PL +/- 0.2	1 PL +/- 0.2	3 V CCFL POWER SUPPLY
2 PL +/- 0	2 PL +/- 0	
ANGLE +/- 0	ANGLE +/- 0	
DRAWN BY L. WENGSTROM	APPR'D BY F.D.	DATE 3/15/02
SIZE A	FSCH NO. 55335	DRAWING NO. BXA-302
SCALE NONE	RELEASED DATE 8/20/99	REVISION DATE 3/15/02
MANUAL REVISIONS NOT PERMITTED		REV. NO. C
		SHEET OF

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com