


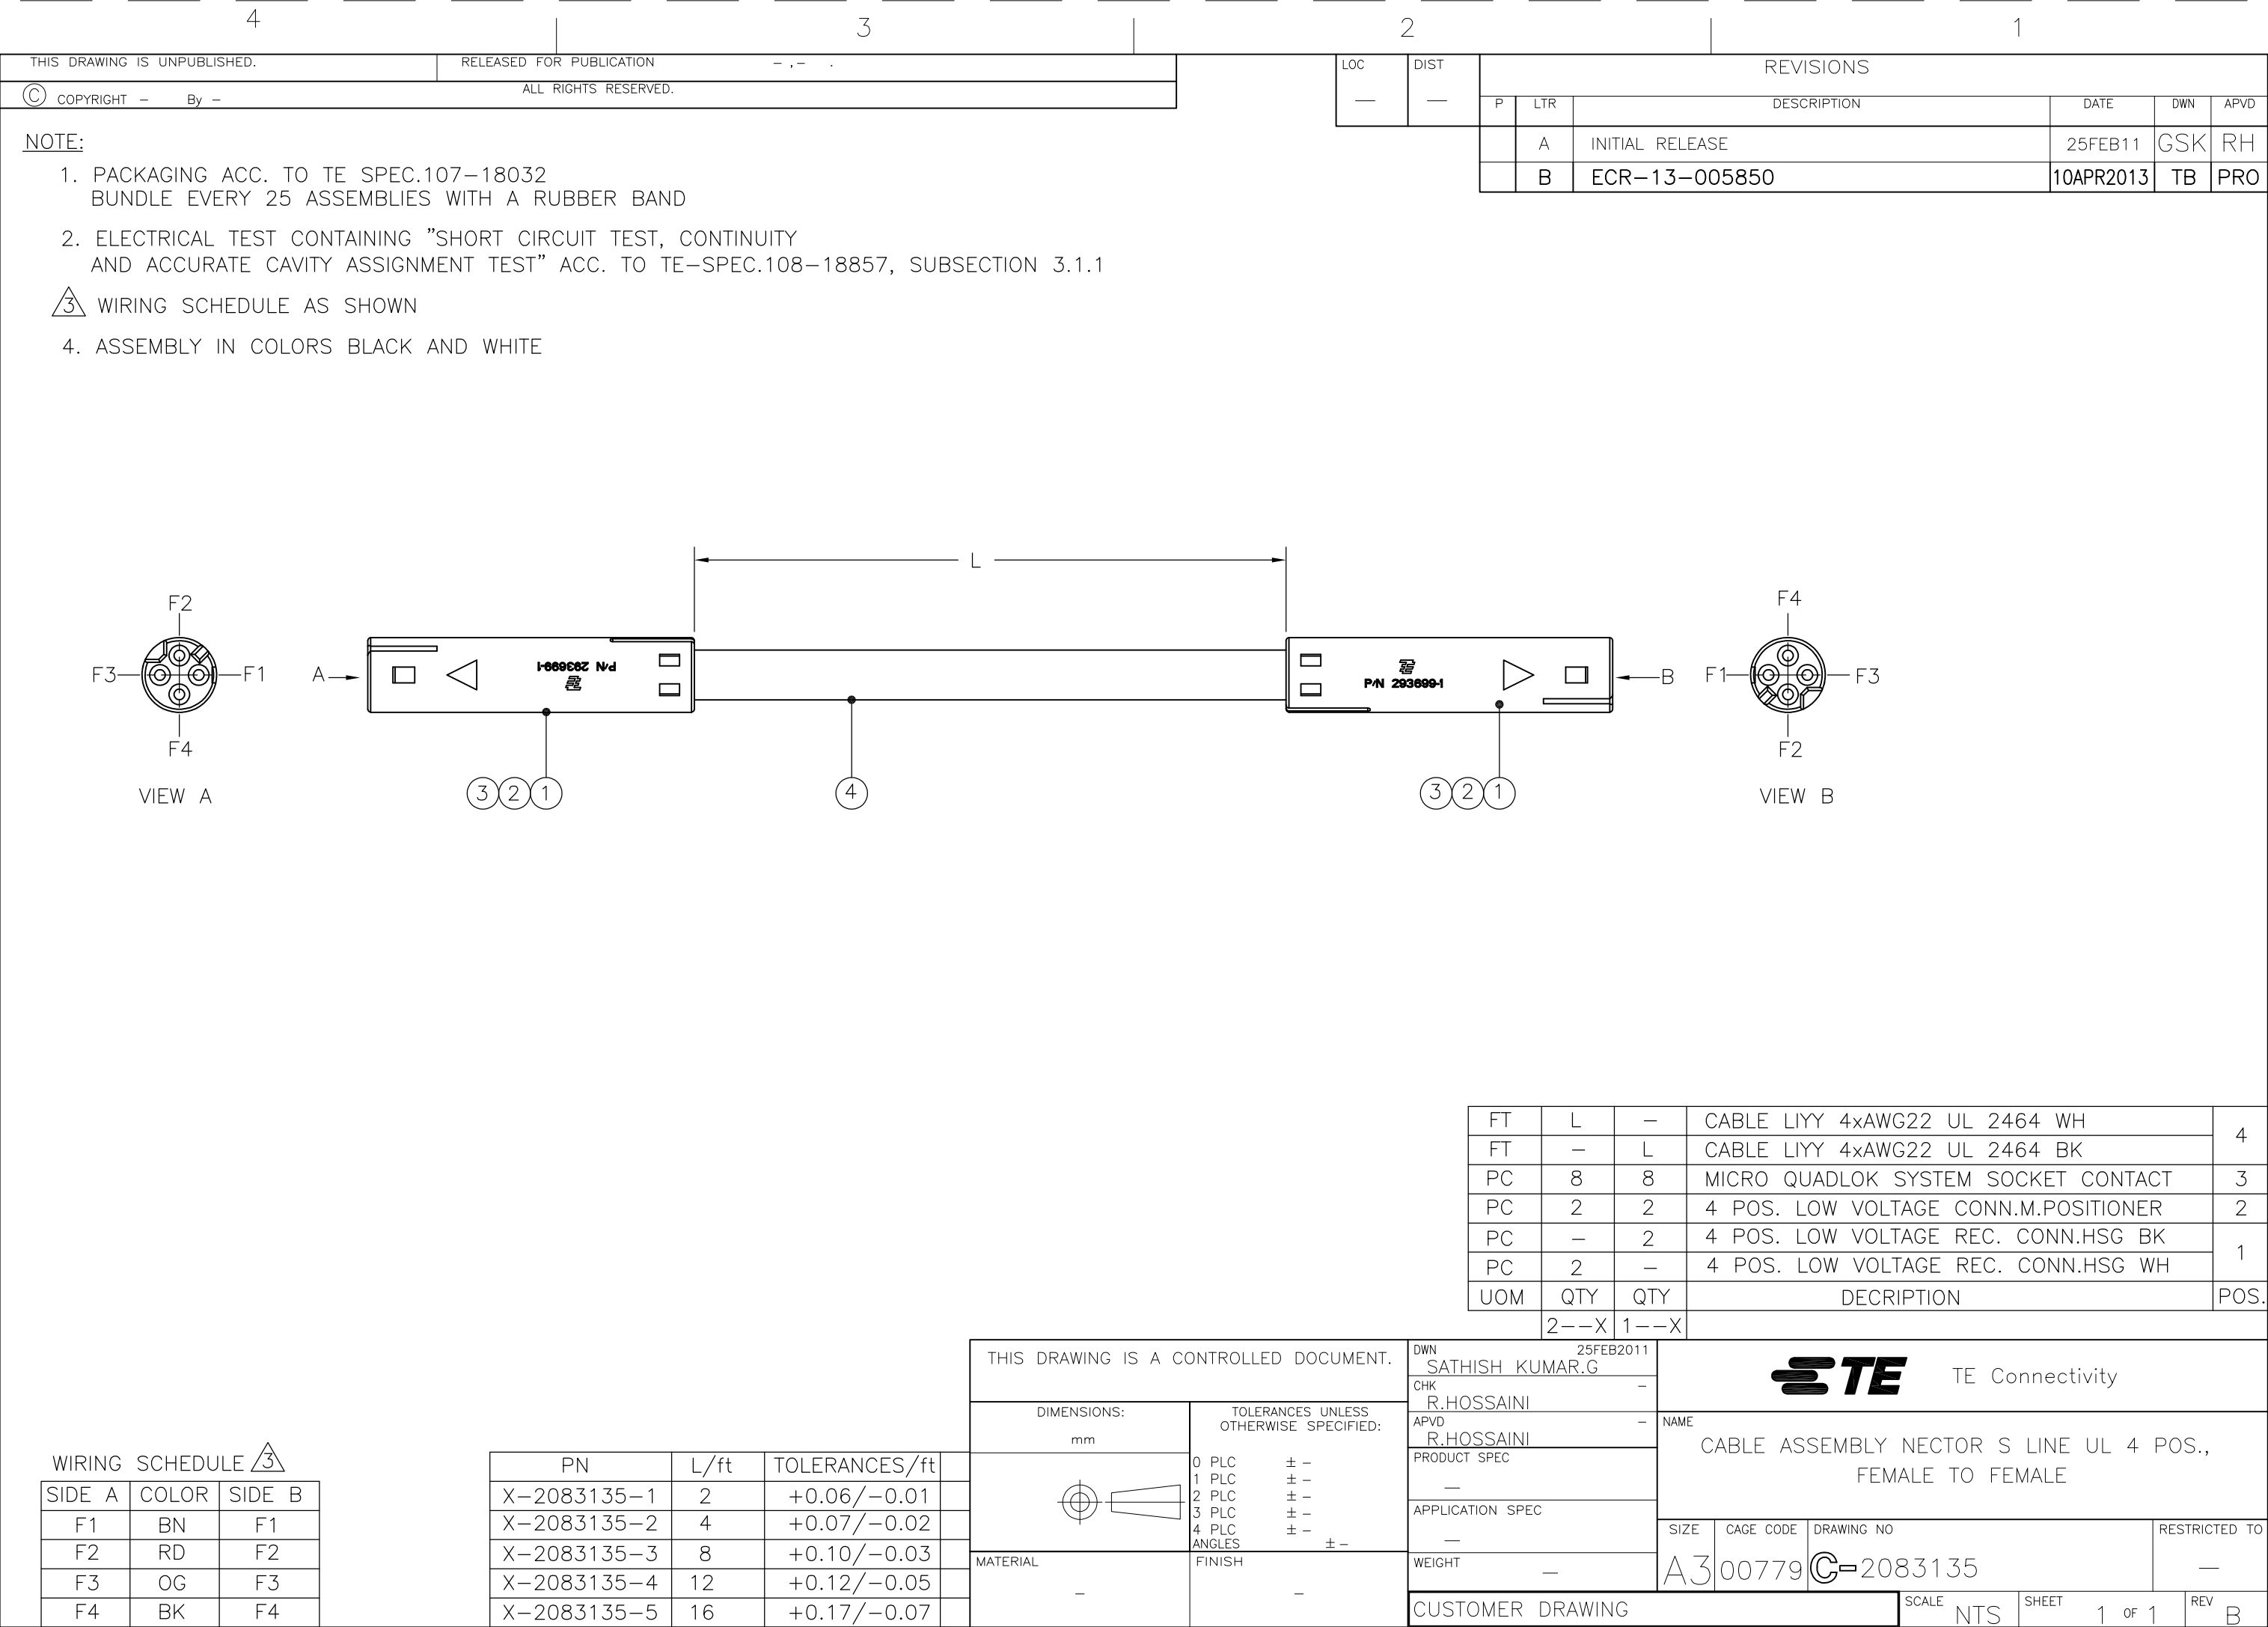

NOTE:

1. PACKAGING ACC. TO TE SPEC.107-18032

BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND

2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY

AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE-SPEC.108-18857, SUBSECTION 3.1.1

3 WIRING SCHEDULE AS SHOWN

4. ASSEMBLY IN COLORS BLACK AND WHITE

F2

F3

F1

F4

VIEW A

A

3

2

1

4

3

2

1

4

L

B

3

2

1

4

3

2

1

4

F4

F1

F3

F2

VIEW B

FT

L

—

CABLE LIYY 4xAWG22 UL 2464 WH

4

FT

—

L

CABLE LIYY 4xAWG22 UL 2464 BK

4

PC

8

8

MICRO QUADLOK SYSTEM SOCKET CONTACT

3

PC

2

2

4 POS. LOW VOLTAGE CONN.M.POSITIONER

2

PC

—

2

4 POS. LOW VOLTAGE REC. CONN.HSG BK

1

PC

2

—

4 POS. LOW VOLTAGE REC. CONN.HSG WH

1

UOM

QTY

QTY

DECRPTION

POS.

2--X

1--X

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

± —

1 PLC

± —

2 PLC

± —

3 PLC

± —

4 PLC

± —

ANGLES

± —

FINISH

—

MATERIAL

—

DWN

25FEB2011

SATHISH KUMAR.G

CHK

—

R.HOSSAINI

APVD

—

R.HOSSAINI

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

TE

TE Connectivity

CABLE ASSEMBLY NECTOR S LINE UL 4 POS.,

FEMALE TO FEMALE

SIZE

A3

CAGE CODE

00779

DRAWING NO

C-2083135

RESTRICTED TO

—

SCALE

NTS

SHEET

1 OF 1

REV

B

WIRING SCHEDULE 3

SIDE A

COLOR

SIDE B

F1

BN

F1

F2

RD

F2

F3

OG

F3

F4

BK

F4

PN

L/ft

TOLERANCES/ft

X-2083135-1

2

+0.06/-0.01

X-2083135-2

4

+0.07/-0.02

X-2083135-3

8

+0.10/-0.03

X-2083135-4

12

+0.12/-0.05

X-2083135-5

16

+0.17/-0.07

1470-19 (3/11)

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com