

MICRO SWITCH

a Honeywell Division

FED. MFG. CODE 91929

ASSEMBLY— PUSHBUTTON SWITCH




CATALOG LISTING

2PB453-T

CATALOG LISTING
2PB453-T
PAGE 1 OF 1
RELEASE NO. PR-20681
REPLACES
M
ISSUE
2

REVISIONS
A CO-1
93593
P P F
03 NOV 98

DDM/CAD
DRAWN
M A M 13 OCT 93
CHECK
J A F 03 NOV 98
CHECK
J A F 03 NOV 98
CHECK

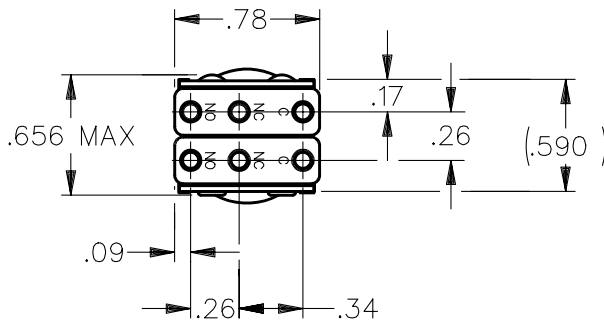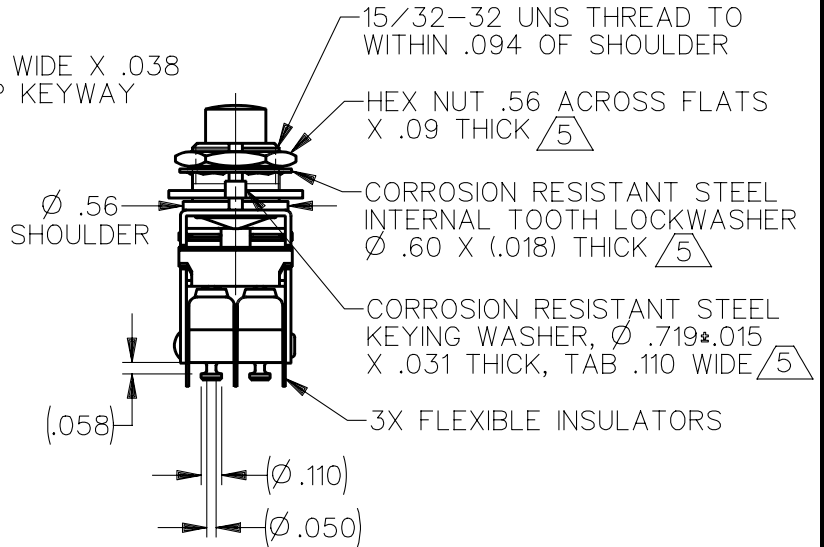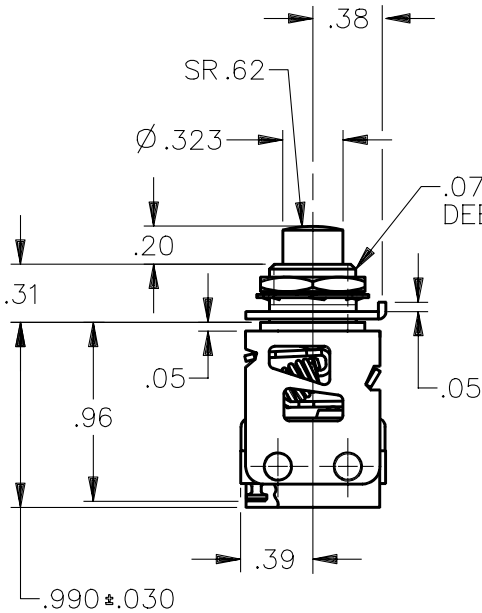


NOTES

- 1 - UNIT INCLUDES 2X "11SM" TYPE BASIC SWITCH
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - TERMINALS ARE GOLD PLATED
- 4 - BASIC SWITCHES HAVE 24K SOLID GOLD CONTACTS
- (5) MOUNTING HARDWARE FURNISHED UNASSEMBLED
- 6 - CORROSION RESISTANT STEEL PLUNGER, BUSHING AND BRACKET

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — — 8-12 N	CONTACT ARRANGEMENT 2X S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
TOTAL TRAVEL — — — — 3.2 mm APPROX	30 VOLTS DC RATING		
PRETRAVEL — — — — — 1.2 mm MIN	INDUCTIVE — — — — — SEA LEVEL — 1/2 AMP	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL — — — — 1.27 mm MAX	RESISTIVE — — — — — SEA LEVEL — 1 AMP	TWO PLACE (.00)	±.015
OVERTRAVEL — — — — — .8 mm MIN	MAXIMUM INRUSH — — — — — 2 AMP	THREE PLACE (.000)	±.005
		ANGLES	±
		WEIGHT	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com