




**Features:**

- Universal AC input/ Full range
- Wide Operating Ambient Temperature (-20°C~70°C)
- High Efficiency, and High Reliability
- Output Protections: OLP/OVP/SCP
- All using 105°C long life electrolytic capacitors.
- 100% full load burn-in test





Model		QPD-60-5	QPD-60-12	QPD-60-15	QPD-60-24	QPD-60-48
Output Characteristics						
DC Output		5V	12V	15V	24V	48V
Rated Current		10A	5A	4A	2.5A	1.25A
Current Range		0~10A	0~5A	0~4A	0~2.5A	0~1.25A
Ripple and Noise (-20~70°C)		<50mV	<50mV	<100mV	<100mV	<200mV
Voltage ADJ. Range		4.6V-5.5V	11.0V-13.0V	13.7V-16.0V	22.0V-25.3V	45.3V-51.3V
Voltage Accuracy		±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
Line Regulation		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Load Regulation		±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
Set-up Time		<2.0s (115VAC input, full load); <1.0s (230VAC input, full load)				
Hold-up Time		>10ms (115VAC input, full load); >20ms (230VAC input, full load)				
Temperature Coefficient		±0.03%/°C				
Overshoot and Undershoot		<5.0%				
Input Characteristics						
Voltage Range		88VAC~264VAC, 124VDC~370VDC				
Frequency Range		47Hz-63Hz				
Efficiency (Typical)	115VAC Input	75%	81%	81%	83%	84%
	230VAC Input	76%	82%	82%	83%	85%
AC Current (max)		1.5A	1.5A	1.5A	1.5A	1.5A
Inrush Current (Typical)		40A@115VAC Cold start 60A@230VAC Cold start				
Leakage Current		<0.25mA@115VAC <3.5mA@230VAC				
Protection						
Over Load (OLP)		105%~150% of rated output current, hiccup mode, auto recovery				
Over Voltage (OVP)		120%~150% of rated output voltage, shut down, re-power on to recover (5V)				
		110%~133% of rated output voltage, shut down, re-power on to recover (12V)				
		110%~140% of rated output voltage, shut down, re-power on to recover (15V, 24V)				
		110%~125% of rated output voltage, shut down, re-power on to recover (48V)				
Short Circuit (SCP)		Long-term mode, auto recovery				
Environmental Characteristics						
Operating Amb. Temp. & Hum		-20°C~70°C; 20%~90% RH Non-Condensing				
Storage Temp. & Hum		-40°C~85°C: 10%-95% RH Non-Condensing				
Safety Standards		UL60950-1; EN60950-1: 2006				
Withstand Voltage		Primary-Secondary: 3.0KVAC;≤10mA. Primary-PG: 1.5KVAC;≤10mA. Secondary-PG: 0.5KVDC;≤10mA				
Isolation Resistance		≥100M ohms				
EMI Conduction & Radiation		Compliance to EN55022(CISPR22) Class B				
EMS Immunity		Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, light industry level, criteria A				
General Characteristics						
MTBF (MIL-HDBK-217F)		More than 200,000Hrs (25°C, Full load)				
Dimension (LxWxH)		129x98x38mm				
Packing		30PCS/CTN. G.W: 14.2kgs				
Cooling Method		Cooling by free air convection				

## MECHANICAL SPECIFICATIONS

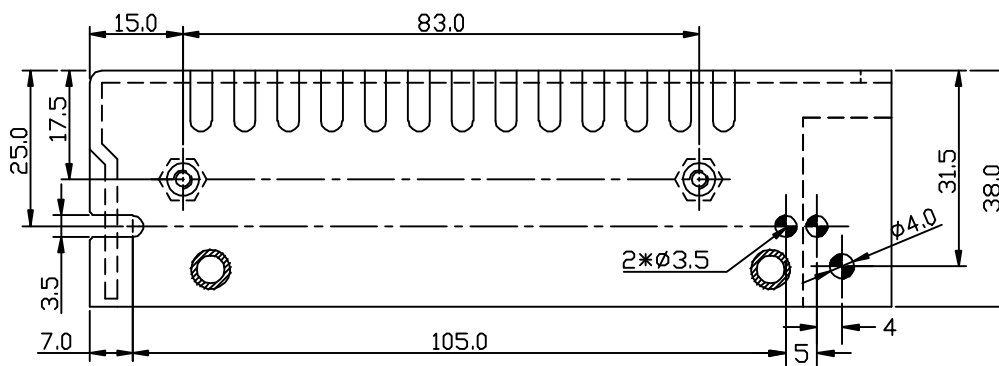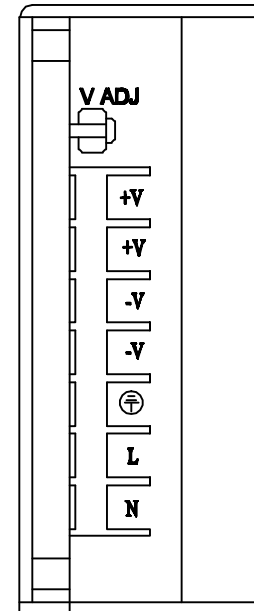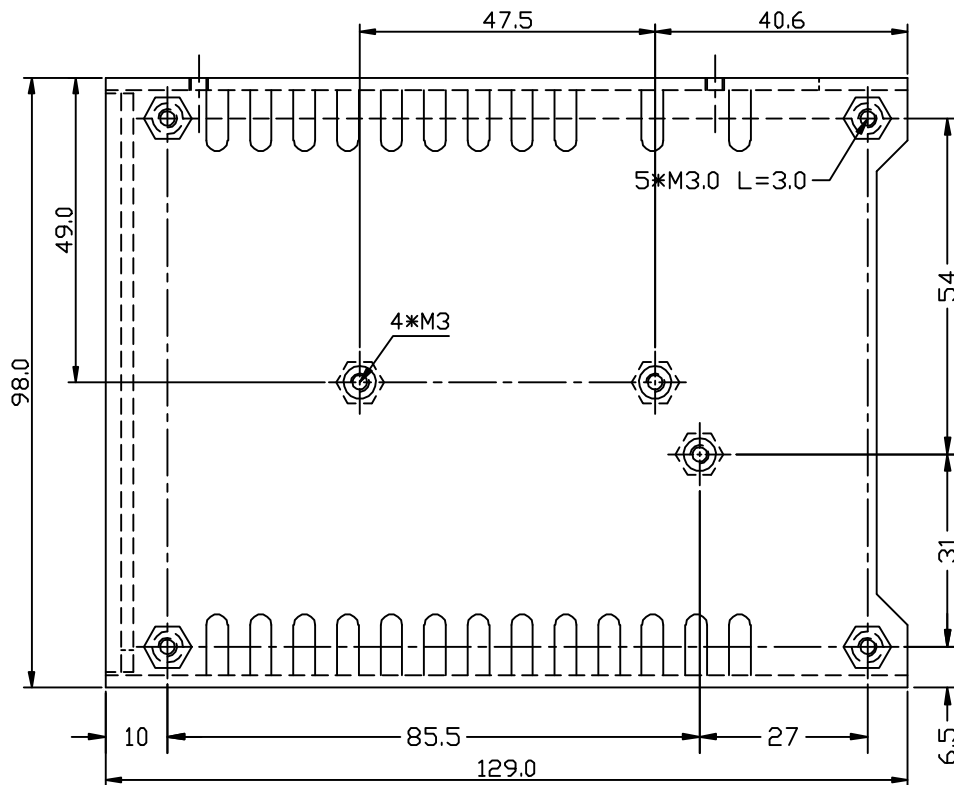

Pin No.	Assignment
1	AC-N
2	AC-L
3	F.G
4.5	DC output -V
6.7	DC output +V

## DERATING CURVE

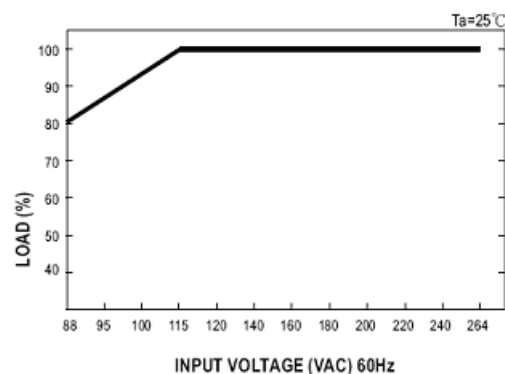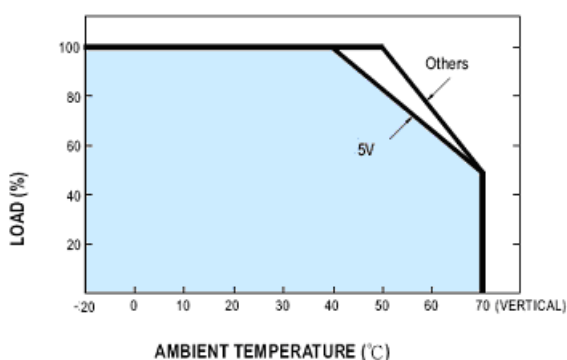

**UNIT: mm**

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
Email        amall@ameya360.com  
QQ            800077892  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
Email        mkt@ameya360.com