




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

1

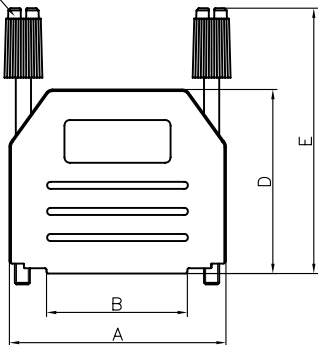


15 pos.

Drawing for sub-assembly
L17DPPK15JS

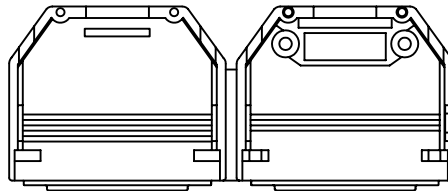


15 pos.

Plastic shell

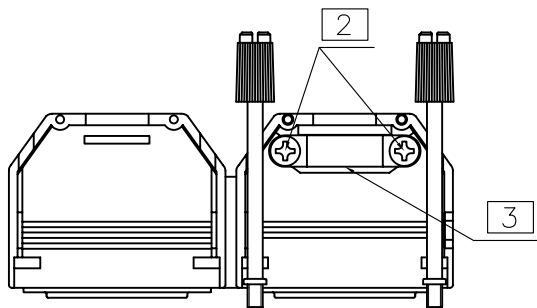


15 pos.

Drawing for side
L17DPPK15JS



VARIANT OF CABLE
STRAIN RELIEF

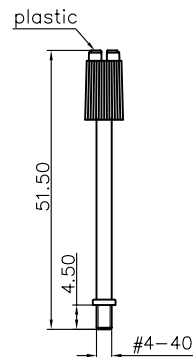

1
thumb
screw

Customer drawing

Commercial Part Number	Dimension				
	A	B	C	D	E
L 17D PPK 09 JS	31.5	18	15	34	49
L 17D PPK 15 JS	40	26	15	34	49
L 17D PPK 25 JS	53.5	28	15	40	49
L 17D PPK 37 JS	71	55	16	40	49



2

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: Thermoplastic, UL94-V0 color black

Thumb screws: Steel shaft with plastic knob,
blue chromate plated

Screws: Steel, blue chromate plated, Philips head

Strain relief: Steel, blue chromate plated

cable clamp with self-tapping screws

Cover: Thermoplastic, UL94-V0 colour black

Temperature range: -40°C to 120°C

Attenuation factor: >40 dB between 30 MHz and 1 GHz


PRODUCT CODE

L 17DPPK XX JS


RoHS Compliance

Series: 17DPPK

Position: 09,15,25,37


UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN Lisa peng		10/17/07			
.X +/- 0.50		CHECKED Hk wang		10/17/07		TITLE	
.XX +/- 0.30		CHECKED					
.XXX +/- 0.20						Hood, DPPK Series	
FRACTIONS +/-							
ANGLES +/- 5°						SIZE DRAWING NO.	
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE : drawing\Draw\CL17DPPKXXJS					
REMOVE SHARP EDGES		ANGLE OF PROJECTION				REV.	
DIMENSIONS							
U.S. INCHES				A4 C L17D PPK XXJS		A	
METRIC MM				SCALE NONE		SHEET 1 OF 3	

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

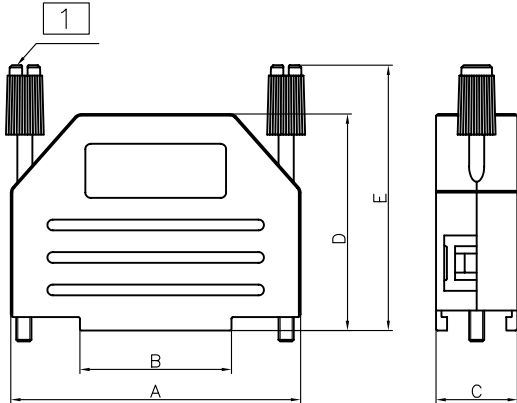


25 pos.

Drawing for sub-assembly
L17DPPK25JS

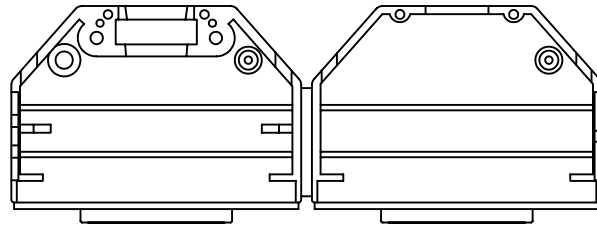


25 pos.

Plastic shell

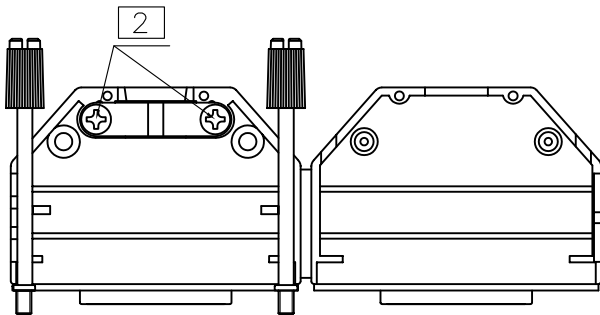

25 pos.

Drawing for side
L17DPPK25JS

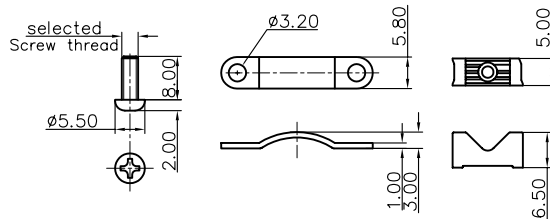

2
Screw

3
Strain relief

4
Cover

Customer drawing


Commercial Part Number	Dimension				
	A	B	C	D	E
L 17D PPK 09 JS	31.5	18	15	34	49
L 17D PPK 15 JS	40	26	15	34	49
L 17D PPK 25 JS	53.5	28	15	40	49
L 17D PPK 37 JS	71	55	16	40	49



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE	Amphenol	
U.S.		DRAWN	10/17/07		
.X	+/-	CHECKED	10/17/07	TITLE	
.XX	+/-	CHECKED	10/17/07		
.XXX	+/-			Hood, DPPK Series	
FRACTIONS	+/-				
ANGLES	+/-			SIZE DRAWING NO.	
SEE NOTES					
FOR MATERIALS AND FINISHES REMOVE SHARP EDGES		DRAWING FILE :	CL17DPPKXXJS	REV.	
DIMENSIONS		ANGLE OF PROJECTION			
U.S.	INCHES			SCALE	
METRIC	MM				
				SHEET 2 OF 3	

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


1

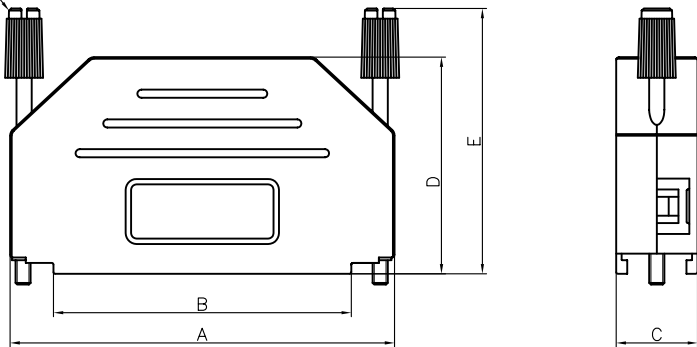

09/37 pos.

Drawing for sub-assembly
L17DPPK09JS/L17DPPK37JS

plastic shell

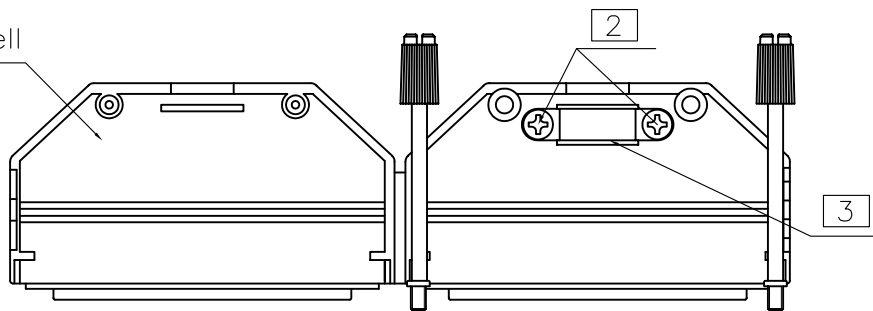

09/37 pos.

Drawing for side
L17DPPK09JS/L17DPPK37JS

Customer drawing

Commercial Part Number	Dimension				
	A	B	C	D	E
L 17D PPK 09 JS	31.5	18	15	34	49
L 17D PPK 15 JS	40	26	15	34	49
L 17D PPK 25 JS	53.5	28	15	40	49
L 17D PPK 37 JS	71	55	16	40	49



2

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK4729	Release new drawing	10/19/07	IP

D-SUB TECHNICAL DATA

Material and finish:

Shell: Thermoplastic, UL94-V0 color black

Thumb screws: Steel shaft with plastic knob,
blue chromate plated

Screws: Steel, blue chromate plated, Philips head

Strain relief: Steel, blue chromate plated
cable clamp with self-tapping screws

Cover: Thermoplastic, UL94-V0 colour black

Temperature range: -40°C to 120°C

Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DPPK XX JS

RoHS Compliance

Series: 17DPPK

Position: 09,15,25,37

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE	Amphenol	
U.S.		DRAWN	10/17/07		
.X	+/-	CHECKED	10/17/07	TITLE	
.XX	+/-	CHECKED	10/17/07		
.XXX	+/-			Hood, DPPK Series	
FRACTIONS	+/-				
ANGLES	+/-			SIZE DRAWING NO.	
SEE NOTES					
FOR MATERIALS AND FINISHES		DRAWING FILE :		REV.	
REMOVE SHARP EDGES		drawing\Draw\CL17DPPKXXJS			
DIMENSIONS		ANGLE OF PROJECTION		SCALE	
U.S.	INCHES				
METRIC	MM			SHEET 3 OF 3	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com