






SPECIFICATIONS

PARAMETERS	VALUES	UNIT
RATED VOLTAGE	3	Vpk
OPERATING VOLTAGE RANGE	2 ~ 4	Vpk
RATED CURRENT (MAX)	90	mA
COIL RESISTANCE	17 ± 3	OHM
MINIMUM SPL @ 10 CM	70	dBA
RESONANT FREQUENCY	4000 ± 500	Hz
OPERATING TEMPERATURE	-20 ~ +70	°C
STORAGE TEMPERATURE	-30 ~ +80	°C
HOUSING MATERIAL	LCP (BLACK)	-
TERMINAL MATERIAL	Sn plated Brass	-
WEIGHT	0.1	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO
PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED,
INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY			

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/06/2014	

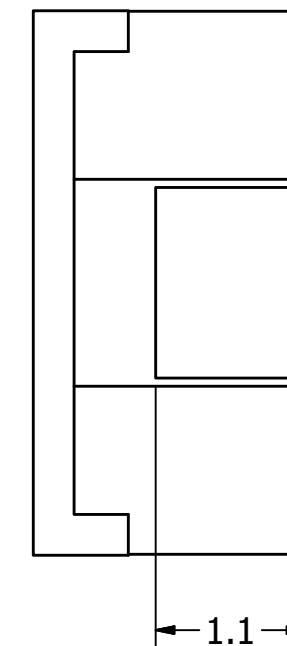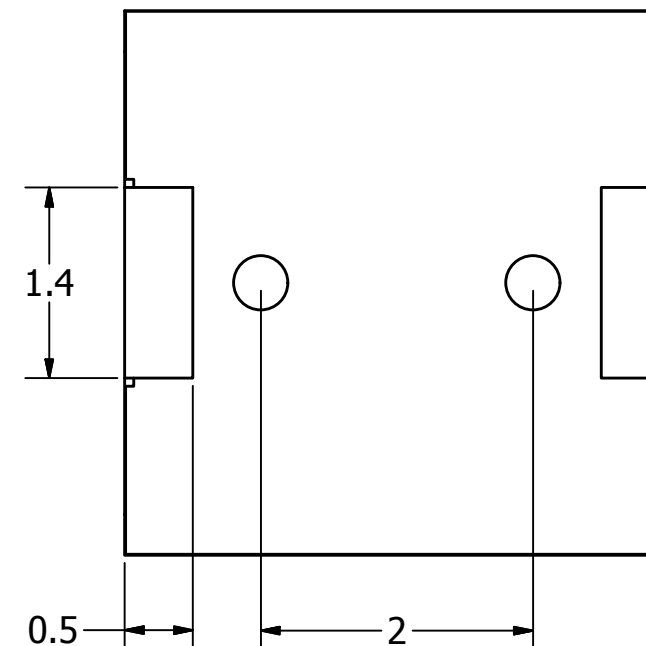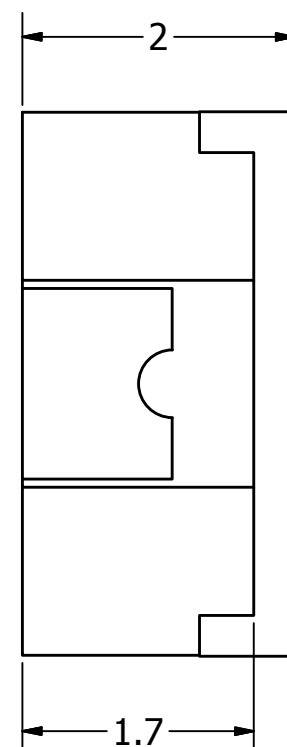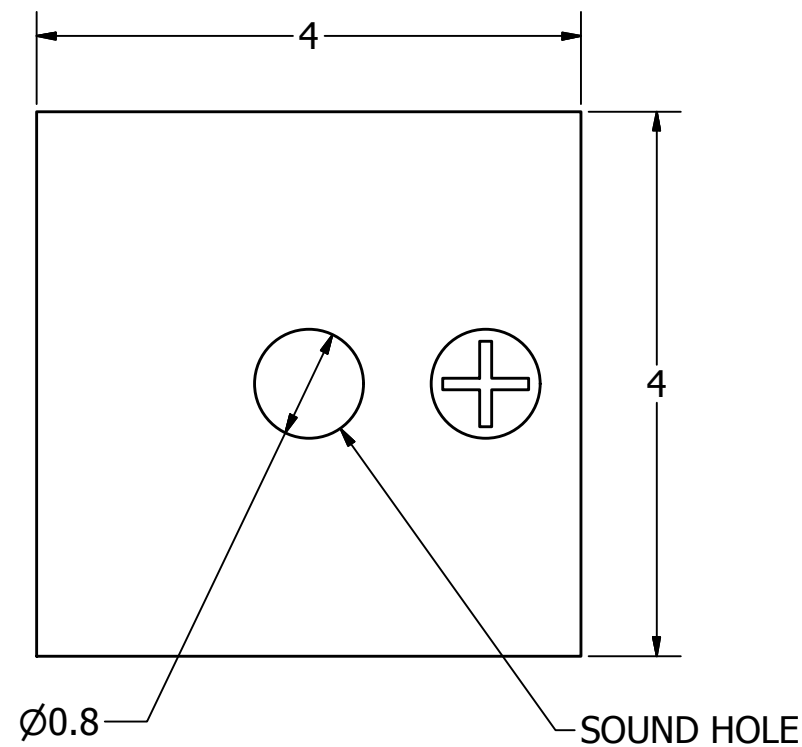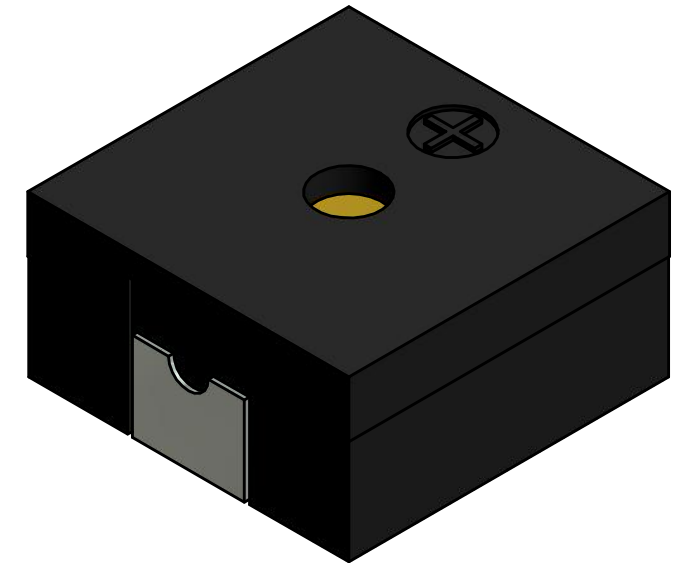


NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED:
ALL PURCHASES ARE SUBJECT TO AND
INCORPORATE THE PUI AUDIO TERMS
AND CONDITIONS SALE FOUND AT
[http://www.puiaudio.com
/pdf/terms_conditions.pdf](http://www.puiaudio.com/pdf/terms_conditions.pdf)
(paper copy available upon request).
DIMENSIONS ARE IN MILLIMETERS,
TOLERANCES ARE ± 0.5 AND
ANGLES ARE $\pm 3^\circ$.

SMT-0440-T-R.idw

SIZE
A3

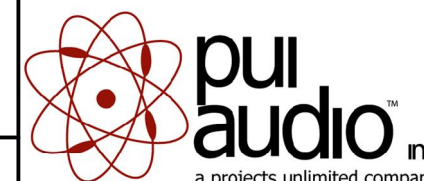

Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
T.E.S.	11/6/2014	C.W.	11/6/2014	B.R.	11/6/2014	11/6/2014

SMT-0440-T-R

c Transducer (Electro-Mech)

Edition	Sheet
-	1 / 1

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com