

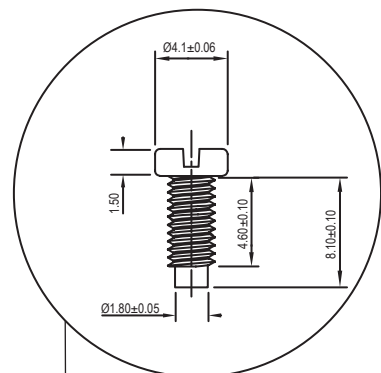

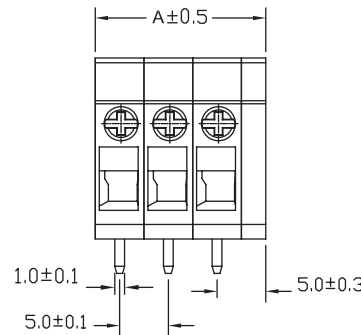
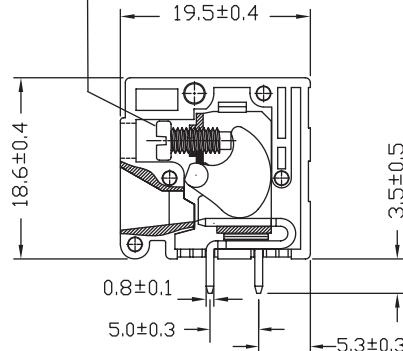


1				2				3				4				5																																																																																					
												TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: PA 66 FLAMABILITY RATING: UL94-V0 COLOR: GREEN METAL HOUSING: STEEL ZINC PLATING CONTACT PIN: BRASS (CuZn) SURFACE OF SOLDER TAIL PLATING: TIN TERMINAL SCREW: STEEL ZINC PLATING TERMINAL SCREW SLOT TYPE: "+" WIRE GUARD: STEEL ENVIRONMENTAL OPERATING TEMPERATURE: -40 UP TO 105°C COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: 20A WORKING VOLTAGE: 300VAC WITHSTANDING VOLTAGE: 2.0KV CONTACT RESISTANCE: 20 mOhm max STANDARD  CERTIFIED E315414 / Model number 69112671 MECHANICAL SOLID WIRE: 30-12 AWG / 0.05-3.3MM² STRANDED WIRE: 30-12 AWG / 0.05-3.3MM² TORQUE: 4.0Lb-In / 0.45Nm WIRE STRIPE LENGTH: 9MM PITCH: 5.00MM PACKAGING: BOX SERIE 126B																																																																																									
								PCB LAYOUT - COMPONENT VIEW <table><tr><th colspan="6">Pitch : 5.00mm (0.197inch)</th></tr><tr><th>Poles</th><th>A(mm)</th><th>A(inch)</th><th>Poles</th><th>A(mm)</th><th>A(inch)</th></tr><tr><td>2</td><td>12.50</td><td>0.492</td><td>15</td><td>77.50</td><td>3.051</td></tr><tr><td>3</td><td>17.50</td><td>0.689</td><td>16</td><td>82.50</td><td>3.248</td></tr><tr><td>4</td><td>22.50</td><td>0.886</td><td>17</td><td>87.50</td><td>3.445</td></tr><tr><td>5</td><td>27.50</td><td>1.083</td><td>18</td><td>92.50</td><td>3.642</td></tr><tr><td>6</td><td>32.50</td><td>1.280</td><td>19</td><td>97.50</td><td>3.839</td></tr><tr><td>7</td><td>37.50</td><td>1.476</td><td>20</td><td>102.50</td><td>4.035</td></tr><tr><td>8</td><td>42.50</td><td>1.673</td><td>21</td><td>107.50</td><td>4.232</td></tr><tr><td>9</td><td>47.50</td><td>1.870</td><td>22</td><td>112.50</td><td>4.429</td></tr><tr><td>10</td><td>52.50</td><td>2.067</td><td>23</td><td>117.50</td><td>4.626</td></tr><tr><td>11</td><td>57.50</td><td>2.264</td><td>24</td><td>122.50</td><td>4.823</td></tr><tr><td>12</td><td>62.50</td><td>2.461</td><td></td><td></td><td></td></tr><tr><td>13</td><td>67.50</td><td>2.657</td><td></td><td></td><td></td></tr><tr><td>14</td><td>72.50</td><td>2.854</td><td></td><td></td><td></td></tr></table>				Pitch : 5.00mm (0.197inch)						Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)	2	12.50	0.492	15	77.50	3.051	3	17.50	0.689	16	82.50	3.248	4	22.50	0.886	17	87.50	3.445	5	27.50	1.083	18	92.50	3.642	6	32.50	1.280	19	97.50	3.839	7	37.50	1.476	20	102.50	4.035	8	42.50	1.673	21	107.50	4.232	9	47.50	1.870	22	112.50	4.429	10	52.50	2.067	23	117.50	4.626	11	57.50	2.264	24	122.50	4.823	12	62.50	2.461				13	67.50	2.657				14	72.50	2.854			
Pitch : 5.00mm (0.197inch)																																																																																																					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)																																																																																																
2	12.50	0.492	15	77.50	3.051																																																																																																
3	17.50	0.689	16	82.50	3.248																																																																																																
4	22.50	0.886	17	87.50	3.445																																																																																																
5	27.50	1.083	18	92.50	3.642																																																																																																
6	32.50	1.280	19	97.50	3.839																																																																																																
7	37.50	1.476	20	102.50	4.035																																																																																																
8	42.50	1.673	21	107.50	4.232																																																																																																
9	47.50	1.870	22	112.50	4.429																																																																																																
10	52.50	2.067	23	117.50	4.626																																																																																																
11	57.50	2.264	24	122.50	4.823																																																																																																
12	62.50	2.461																																																																																																			
13	67.50	2.657																																																																																																			
14	72.50	2.854																																																																																																			
<table><tr><th colspan="4">RoHS Compliant</th></tr><tr><td>G</td><td></td><td></td><td></td></tr><tr><td>F</td><td></td><td></td><td></td></tr><tr><td>E</td><td></td><td></td><td></td></tr><tr><td>D</td><td></td><td></td><td></td></tr><tr><td>C</td><td></td><td></td><td></td></tr><tr><td>B</td><td>17-JUL-14</td><td>DRAWING</td><td>AS</td></tr><tr><td>A</td><td>20-JUN-12</td><td>PDF</td><td>GG</td></tr><tr><td>REV</td><td>DATE</td><td>FILE</td><td>BY</td></tr></table>				RoHS Compliant				G				F				E				D				C				B	17-JUL-14	DRAWING	AS	A	20-JUN-12	PDF	GG	REV	DATE	FILE	BY	PROJECTION: 				GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 																																																									
RoHS Compliant																																																																																																					
G																																																																																																					
F																																																																																																					
E																																																																																																					
D																																																																																																					
C																																																																																																					
B	17-JUL-14	DRAWING	AS																																																																																																		
A	20-JUN-12	PDF	GG																																																																																																		
REV	DATE	FILE	BY																																																																																																		
				UNIT: MM SCALE: SHEET: 1/1 DRAW: MARVIN				DESCRIPTION: SERIE 126B - 5,0mm Horizontal Entry with Stamping Clamp WERI PART NO: 691 126 710 0xx B				SIZE A4																																																																																									

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com