






Dimensions mm[inch]

tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

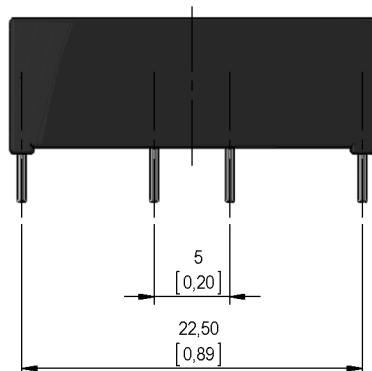


Isometric

Scale 1:1
Maßstab 1:1



Schematic




Marking


according to EN60062/factory code
gem. EN60062/Fertigungsstätte

MEDER electronic
MK02/6-0 YM/P

Housing

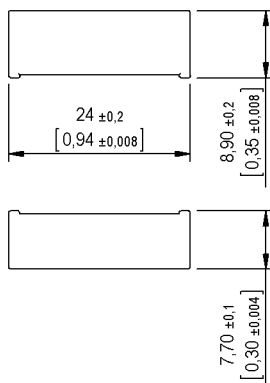

Switching distances

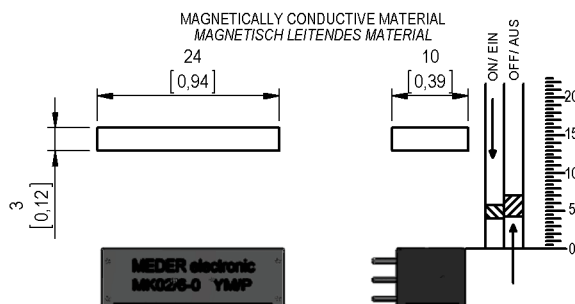



Europe: +49 / 7731 8399 0

| Email: info@meder.com

Item No.:

USA: +1 / 508 295 0771

| Email: salesusa@meder.com

2226000001

Asia: +852 / 2955 1682

| Email: salesasia@meder.com

Item:

MK02/6-0

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull in	at 20°C	3,5		5,5	mm
Drop out	at 20°C	3,7		7	mm
Test equipment		SV 041			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
operating voltage	DC or Peak AC			170	V
operating ampere	DC or Peak AC			0,5	A
Switching current	DC or Peak AC			0,5	A
Housing material		PBT 30% glass fibre reinforced			
Case color		black			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Ambient temperature		-20		80	°C
Storage temperature		-20		80	°C

Modifications in the sense of technical progress are reserved

Designed at: 29.01.09 Designed by: WKOVACS

Approval at: 03.12.09 Approval by: HWEDELE

Last Change at: 16.11.12 Last Change by: OMUELLER

Approval at: 10.04.13 Approval by: DKUECHLER

Version: 06

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com