

# Double Contact Candelabra Bayonet

## 12 SERIES

- DOUBLE CONTACT CANDELABRA BAYONET NON-GROUNDED LAMPHOLDERS
- 6" WIRE LEADS • ZINC PLATED STEEL SHELL
- MAXIMUM RATING: 75 WATTS, 125 VOLTS
- UL LISTED • UL FILE E20356

### Overview

The 12 Series lampholders are constructed with a zinc plated steel shell, with two brass contacts mounted on a phenolic-insulating disc and two 6" wire leads. The bracket and shell are grounded independent of the contacts. Lampholders are designed for use with double contact candelabra bayonet lamps.

### Specifications

**Shell:** zinc plated steel.

**Custom shells also available:**

**Double contact indexed shell:** add **-DX** to end of part number. For example, **12-207** changes to **12-207-DX** for indexed shell. Shell is only available in zinc plated steel.

**Brass shell:** add **-BR** to the end of a part number. For example, **12-207** changes to **12-207-BR** for brass shell.

**Center contacts:** nickel plated brass supplied with phenolic insulating disc. A custom ceramic insulating disc is also available.


**Spring:** zinc plated steel. A custom stainless steel spring is also available.

**Wire leads:** 6" **Leads:** #18 AWG, black, bare copper, PVC insulated, UL/CSA rated 105° C, stripped 1/2". Non-grounded units are supplied with two 6" wire leads. Custom wire lengths, stripping, termination and wire types are also available.

**Mounting: Brackets:** 0.025" to 0.032" zinc plated steel. Custom brackets and plating types are available. **Plug buttons:** zinc plated steel for 15/16" mounting holes. **Threaded bushing:** for 13/32" mounting hole. Supplied with lockwasher and hex nut.

**Maximum rating:** 75 Watts, 125 Volts.


**12-207**

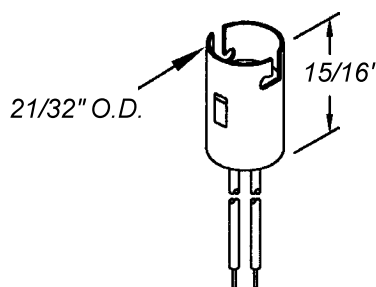

Non-grounded only.

Non-grounded only.

**12-230BN**

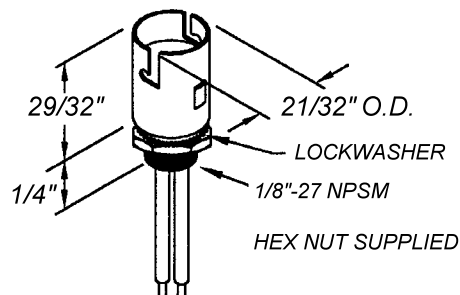

Suggested Mounting Hole 13/32" DIA.

**Can't find it here? We have many more standard and custom solutions**

For further information, phone Customer Service at 800.522.5546.

# Double Contact Candelabra Bayonet

## 12 SERIES


UL LISTED

Maximum Rating: 75 Watts, 125 Volts

Zinc Plated Shell

Non-Grounded

6" Wire Leads

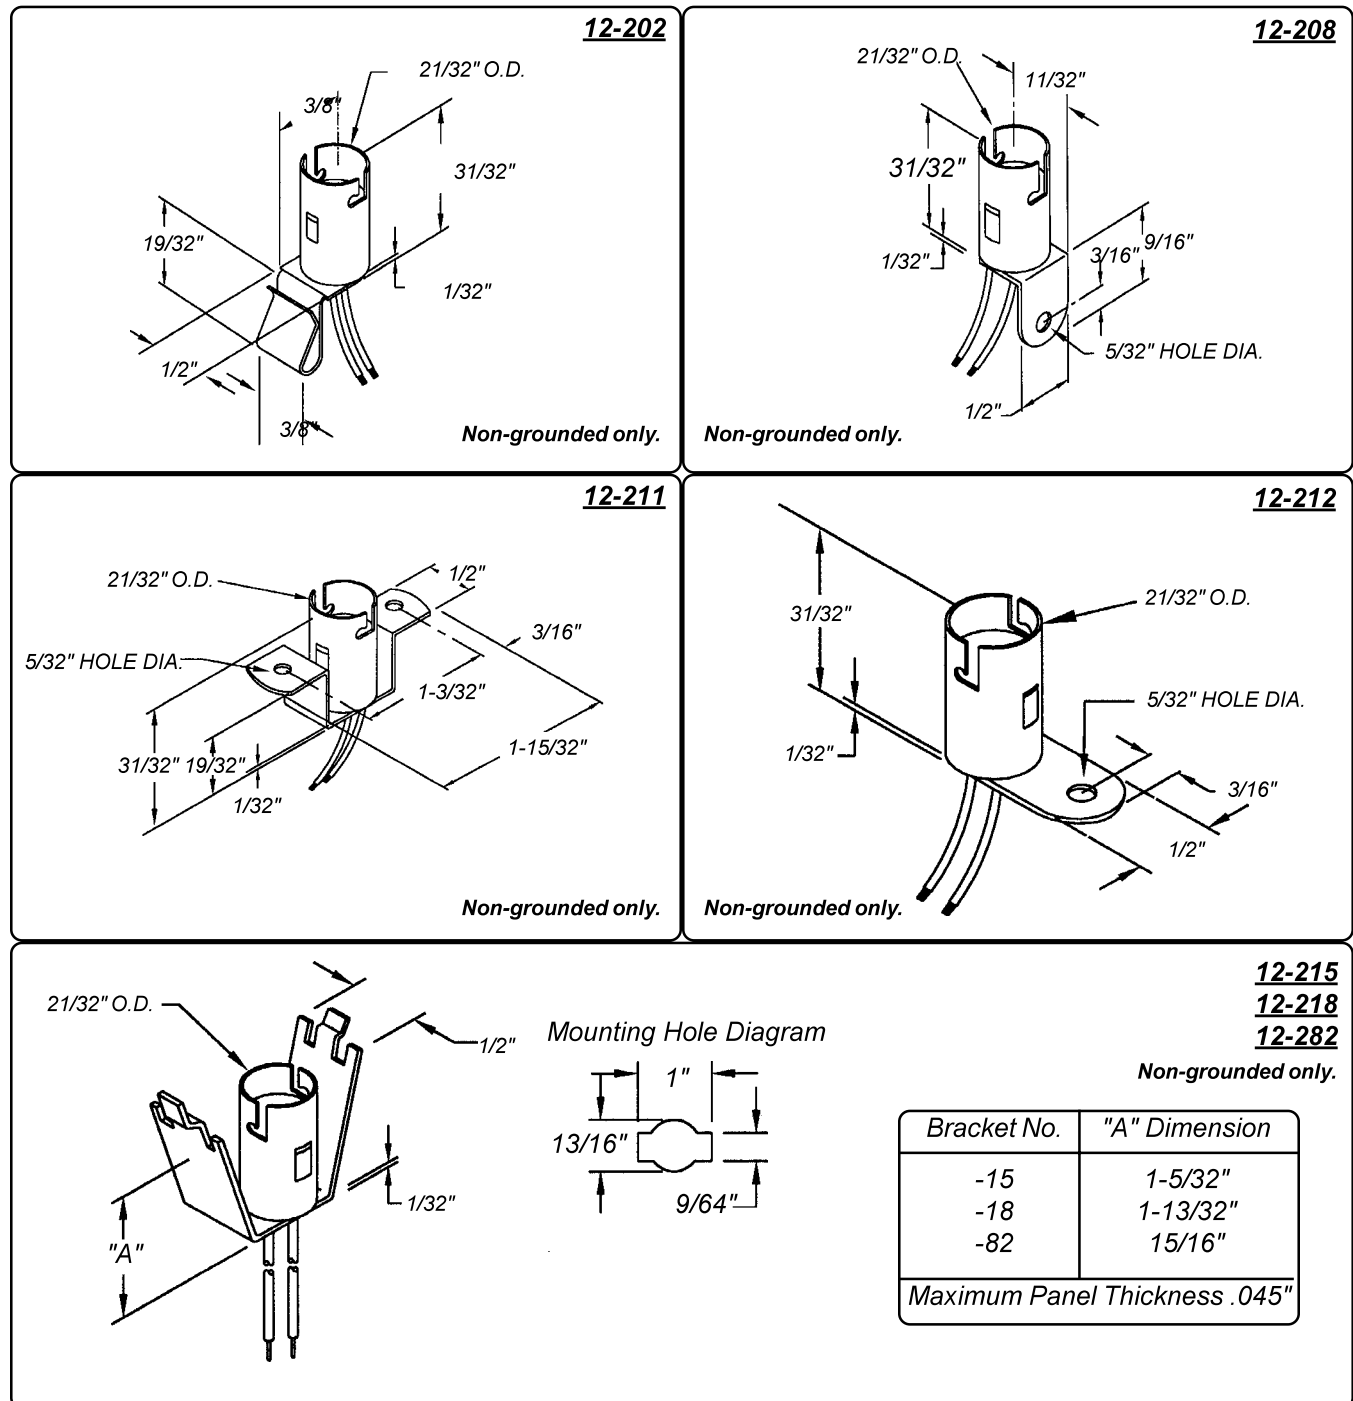

# Double Contact Candelabra Bayonet

## 12 SERIES

UL LISTED

Maximum Rating: 75 Watts, 125 Volts

Zinc Plated Shell

Non-Grounded

6" Wire Leads

<p><b>12-223</b></p> <p>Non-grounded only.</p>	<p><b>12-225</b></p> <p>Non-grounded only.</p>		
<p><b>12-226</b></p> <p>Non-grounded only.</p>	<p><b>12-227</b></p> <p>Non-grounded only.</p>		
<p><b>12-240</b></p> <p>Non-grounded only.</p>	<p><b>12-240X</b></p> <p>Non-grounded only.</p>	<p><b>12-240XT</b></p> <p>Non-grounded only.</p>	<p><b>12-240XTR</b></p> <p>Non-grounded only.</p>

Plug buttons: zinc-plated steel, for 15/16" hole with panel thickness range 1/32" to 5/64".

Plug buttons: zinc-plated steel, for 15/16" hole with panel thickness range 1/32" to 5/64".

# Double Contact Candelabra Bayonet

## 12 SERIES


UL LISTED

Maximum Rating: 75 Watts, 125 Volts

Zinc Plated Shell

Non-Grounded

6" Wire Leads

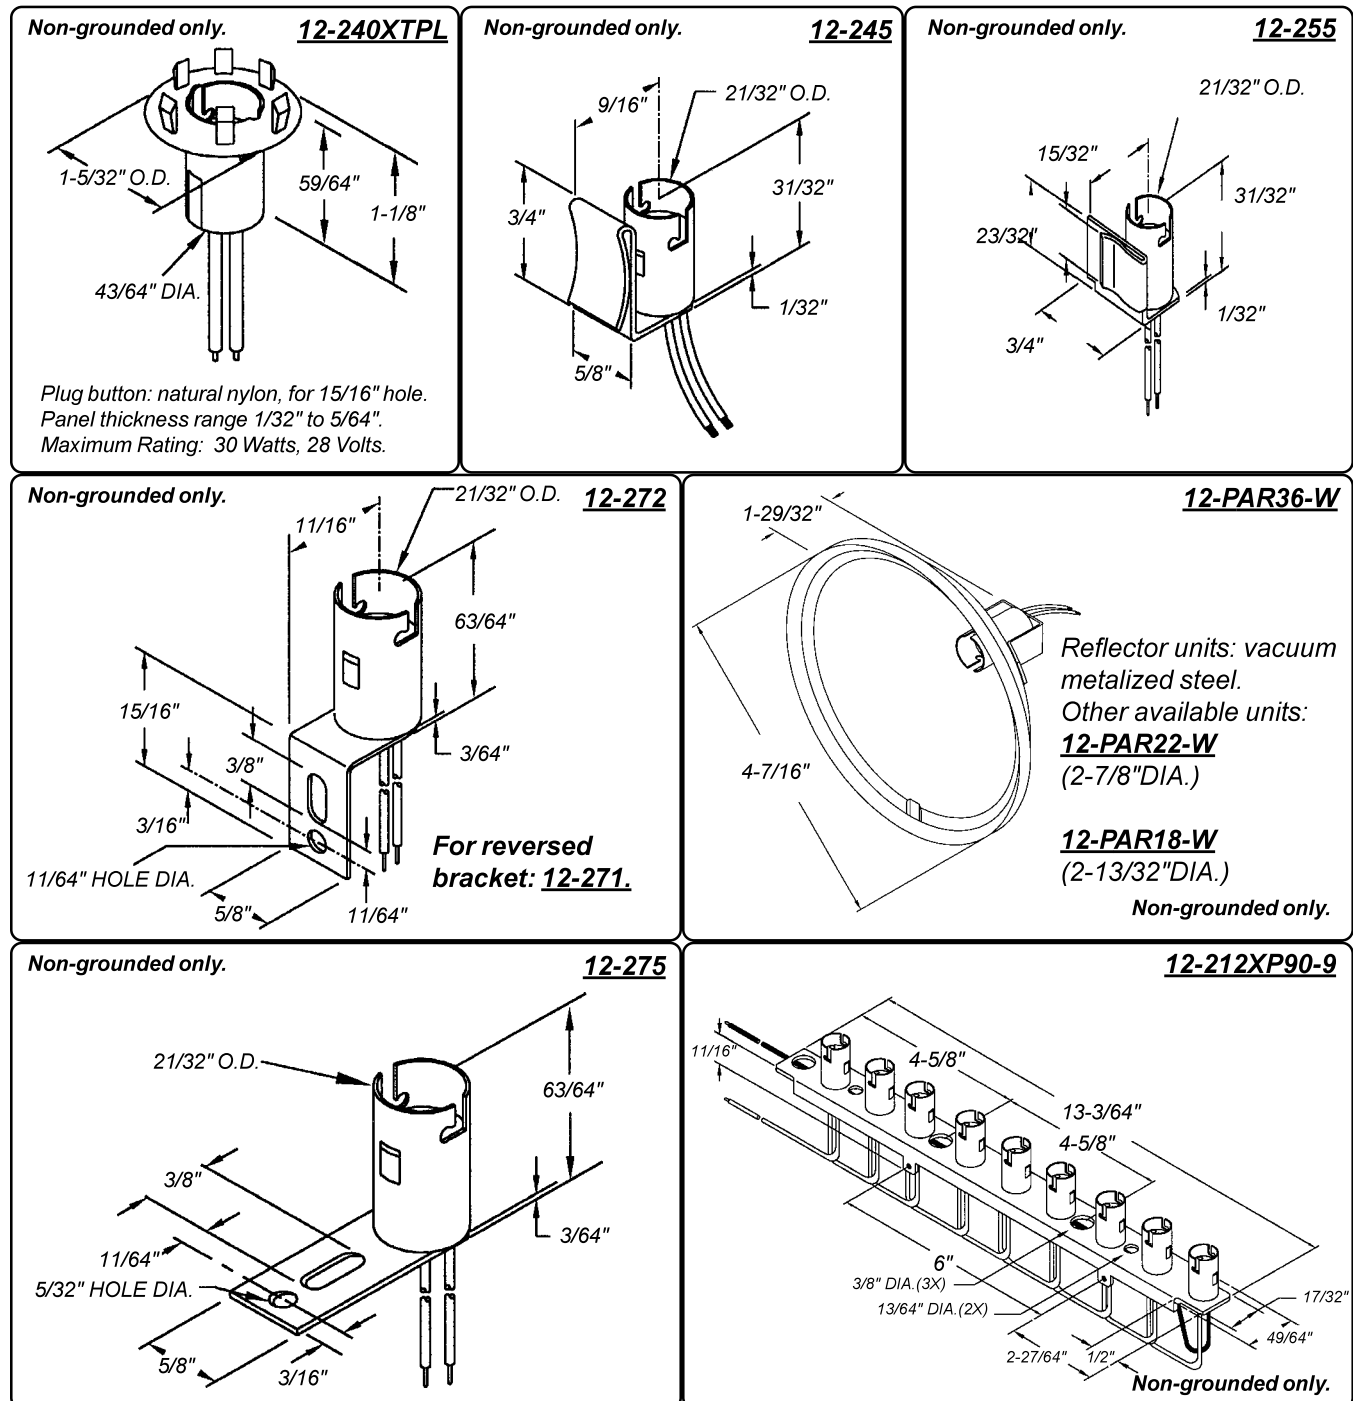

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
Email        amall@ameya360.com  
QQ            800077892  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
Email        mkt@ameya360.com