

DETAILS


Product Number	CA12012_LAURA-O-PIN
Family	Laura
Type	Assembly
Color	white
Diameter	21,6 x 21,6 mm
Height	13,1 mm
Style	square
Optic Material	PMMA
Holder Material	
Fastening	tape, pin
Status	production ready
ROHS Compliant	Yes
Date Updated	18/11/2015




OPTICAL PROPERTIES

LED	Viewing	Light	Efficiency		Connector
	Angle	Beam	ciency	cd/lm	
XP-E	40+13 deg	Oval	91 %	4.800	-
XP-G	40+13 deg	Oval	91 %	-	-
XB-D	39+11 deg	Oval	94 %	4.810	-
XP-E2	41+10 deg	Oval	91 %	6.740	-
LUXEON Rebel	41+12 deg	Oval	90 %	5.000	-
LUXEON Z ES	40+11 deg	Oval	91 %	6.200	-
LUXEON H50-2	sim: 13+61	Oval	sim: 81 %	sim: 2.700	-
LUXEON Rebel ES	41+14 deg	Oval	90 %	4.600	-
NCSxx19B	41+13 deg	Oval	90 %	5.100	-
SFH 4715S (IR)	41+14 deg	Oval	sim: 80 %	-	-
Oslon Square PC	40+12 deg	Oval	88 %	5.100	-
Oslon Square EC	39+14 deg	Oval	87 %	3.820	-
Oslon SSL 80	40+12 deg	Oval	86 %	4.530	-
Oslon SSL 150	36+10 deg	Oval	86 %	4.440	-
SFH4725s (IR)	40+14 deg	Oval	-	-	-
Z5	40+12 deg	Oval	-	-	-


Relative intensity of CA12012_LAURA-O-PIN_(XP-E2)

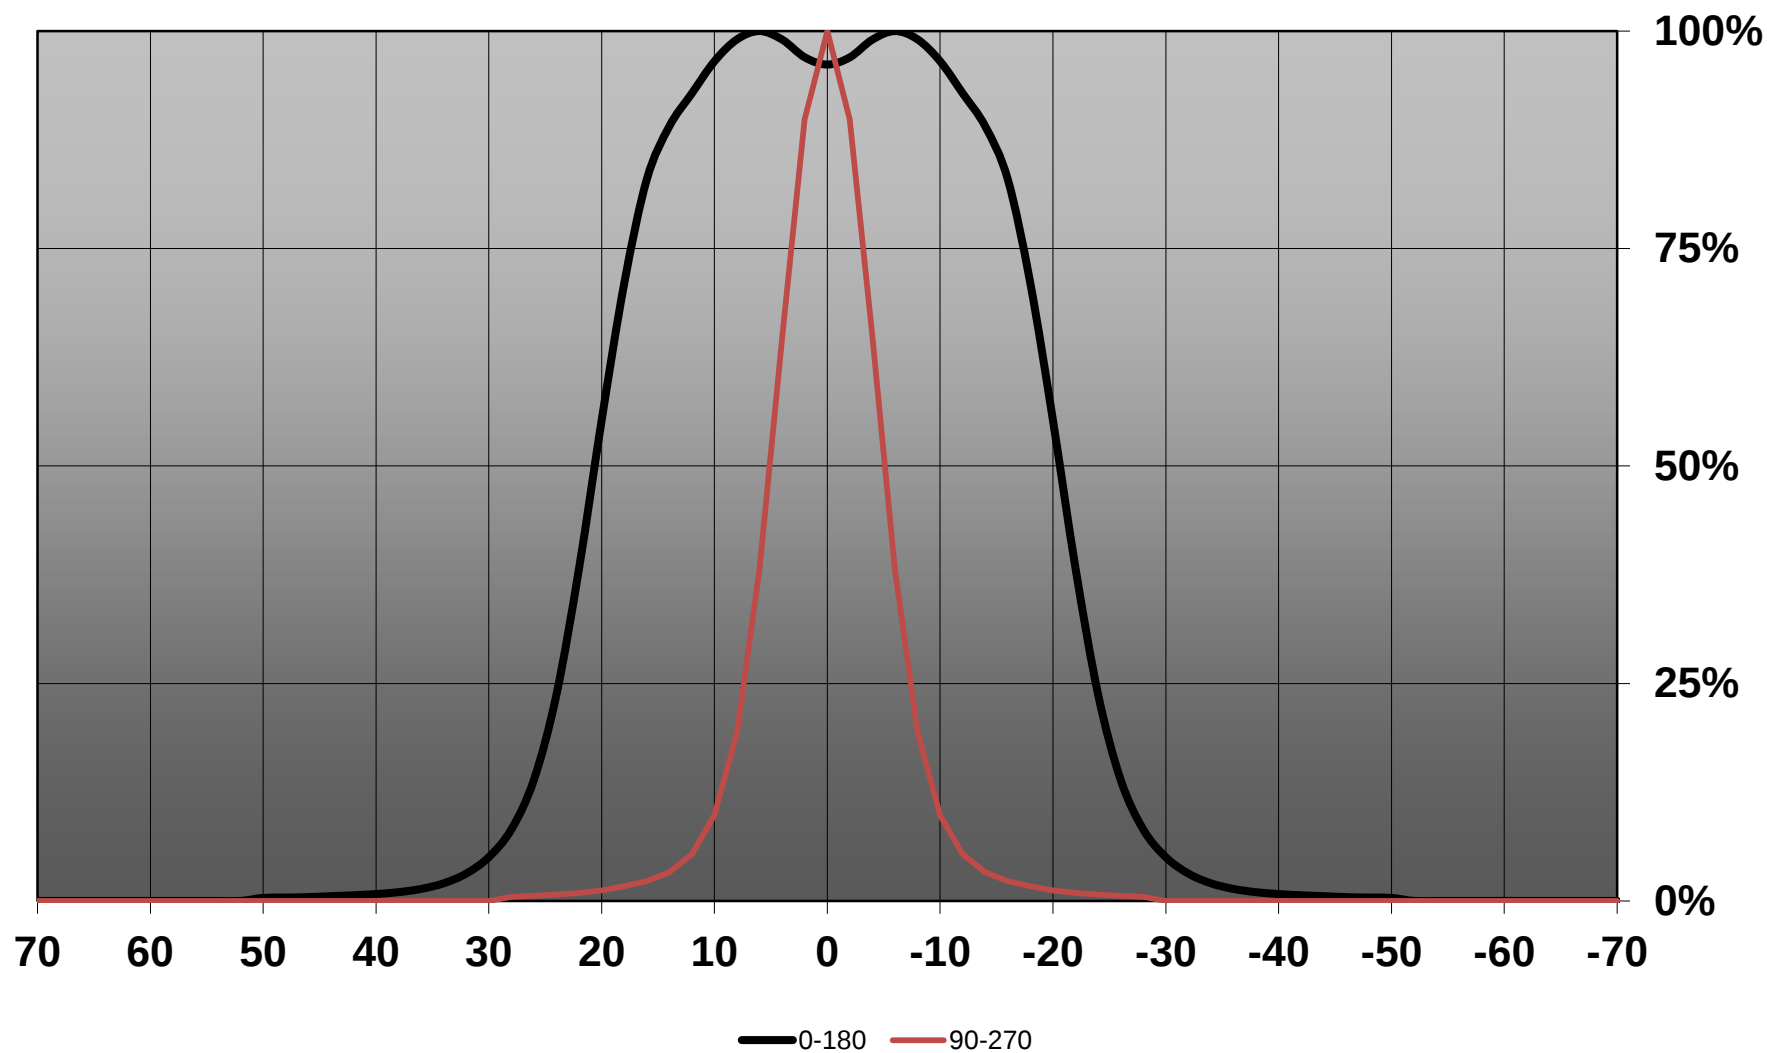


Relative intensity of CA12012_LAURA-O-PIN_(Luxeon Z ES)

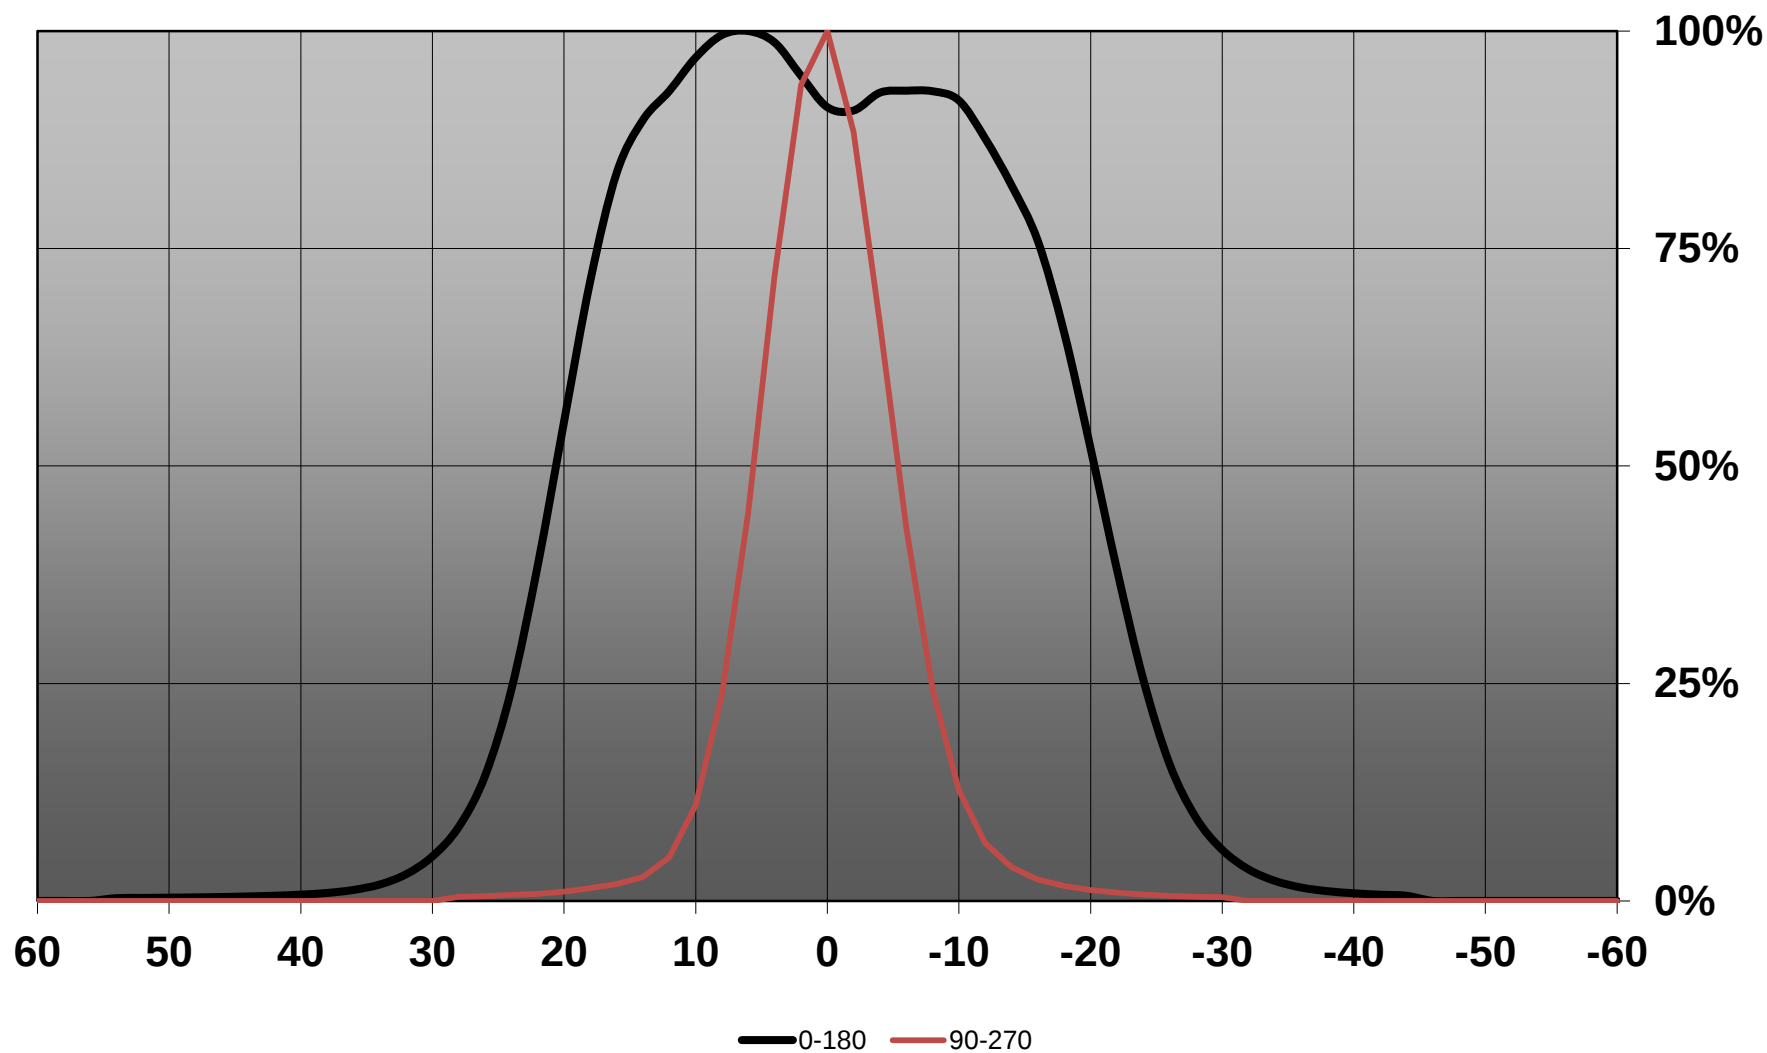

Relative intensity of CA12012_LAURA-O-PIN_(Oslon_Square_PC)

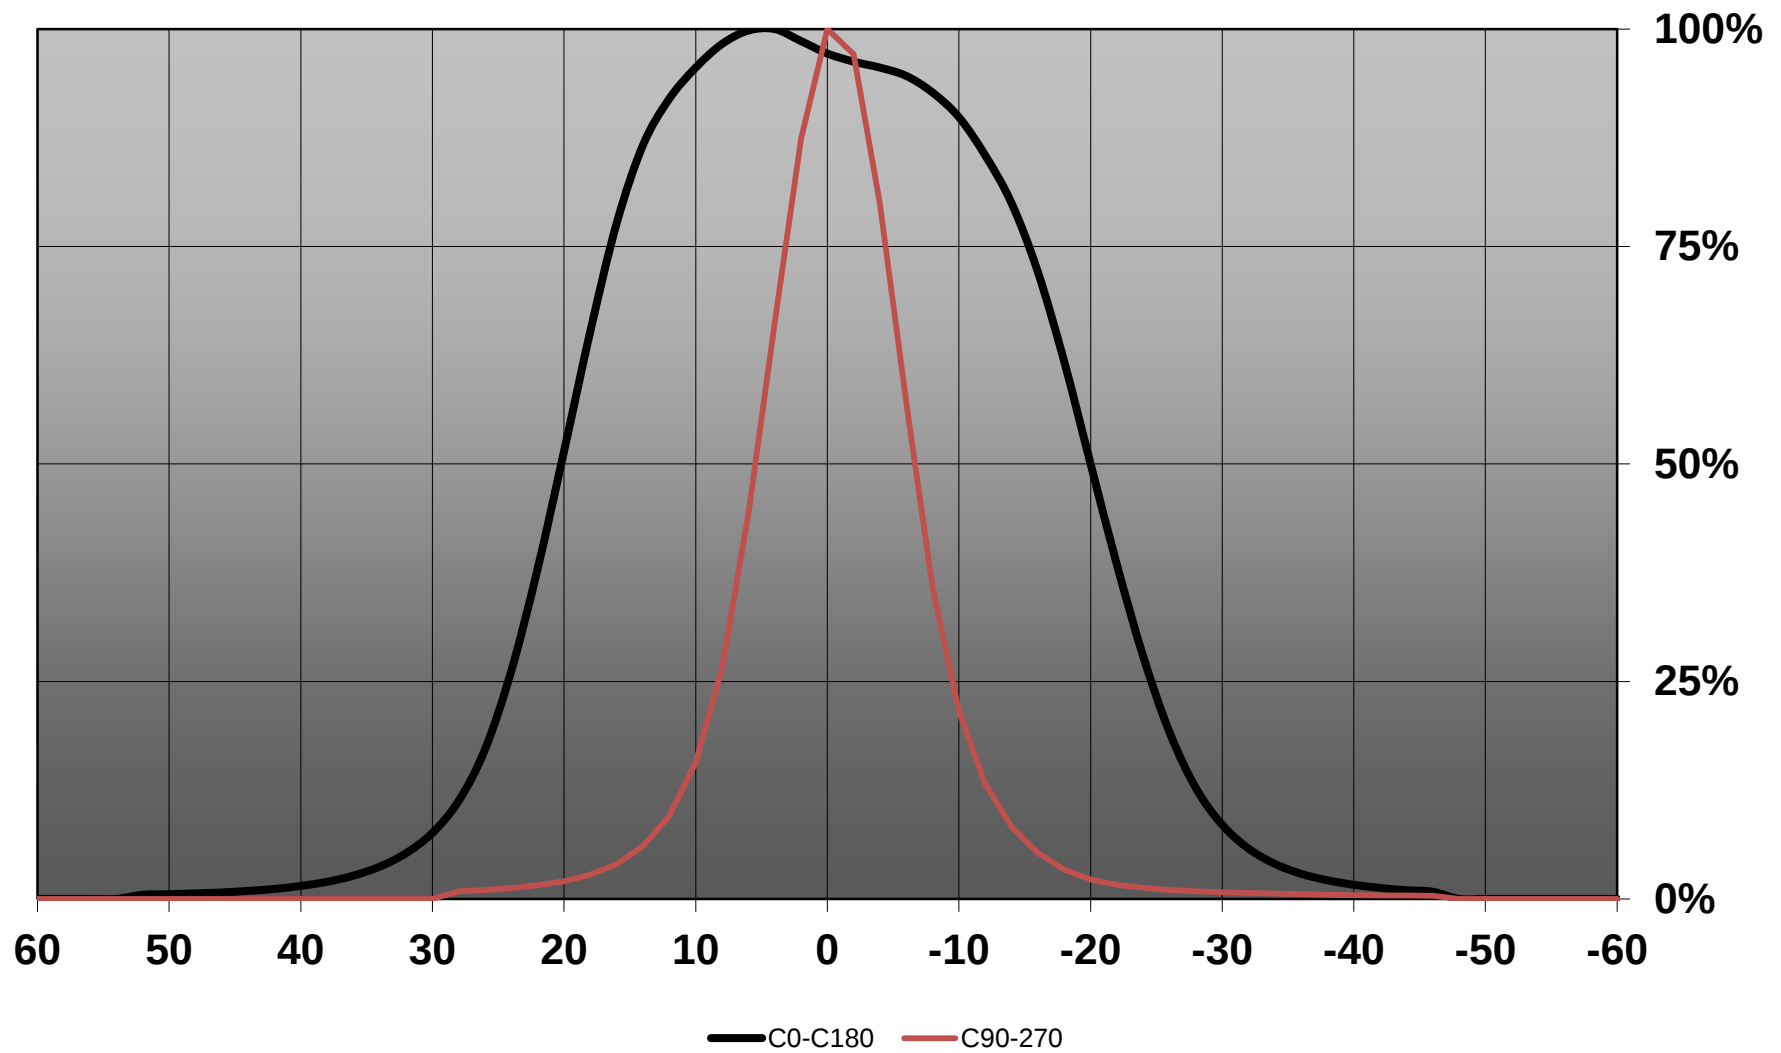


Relative intensity of CA12012_LAURA-O-PIN_(SFH4725S)

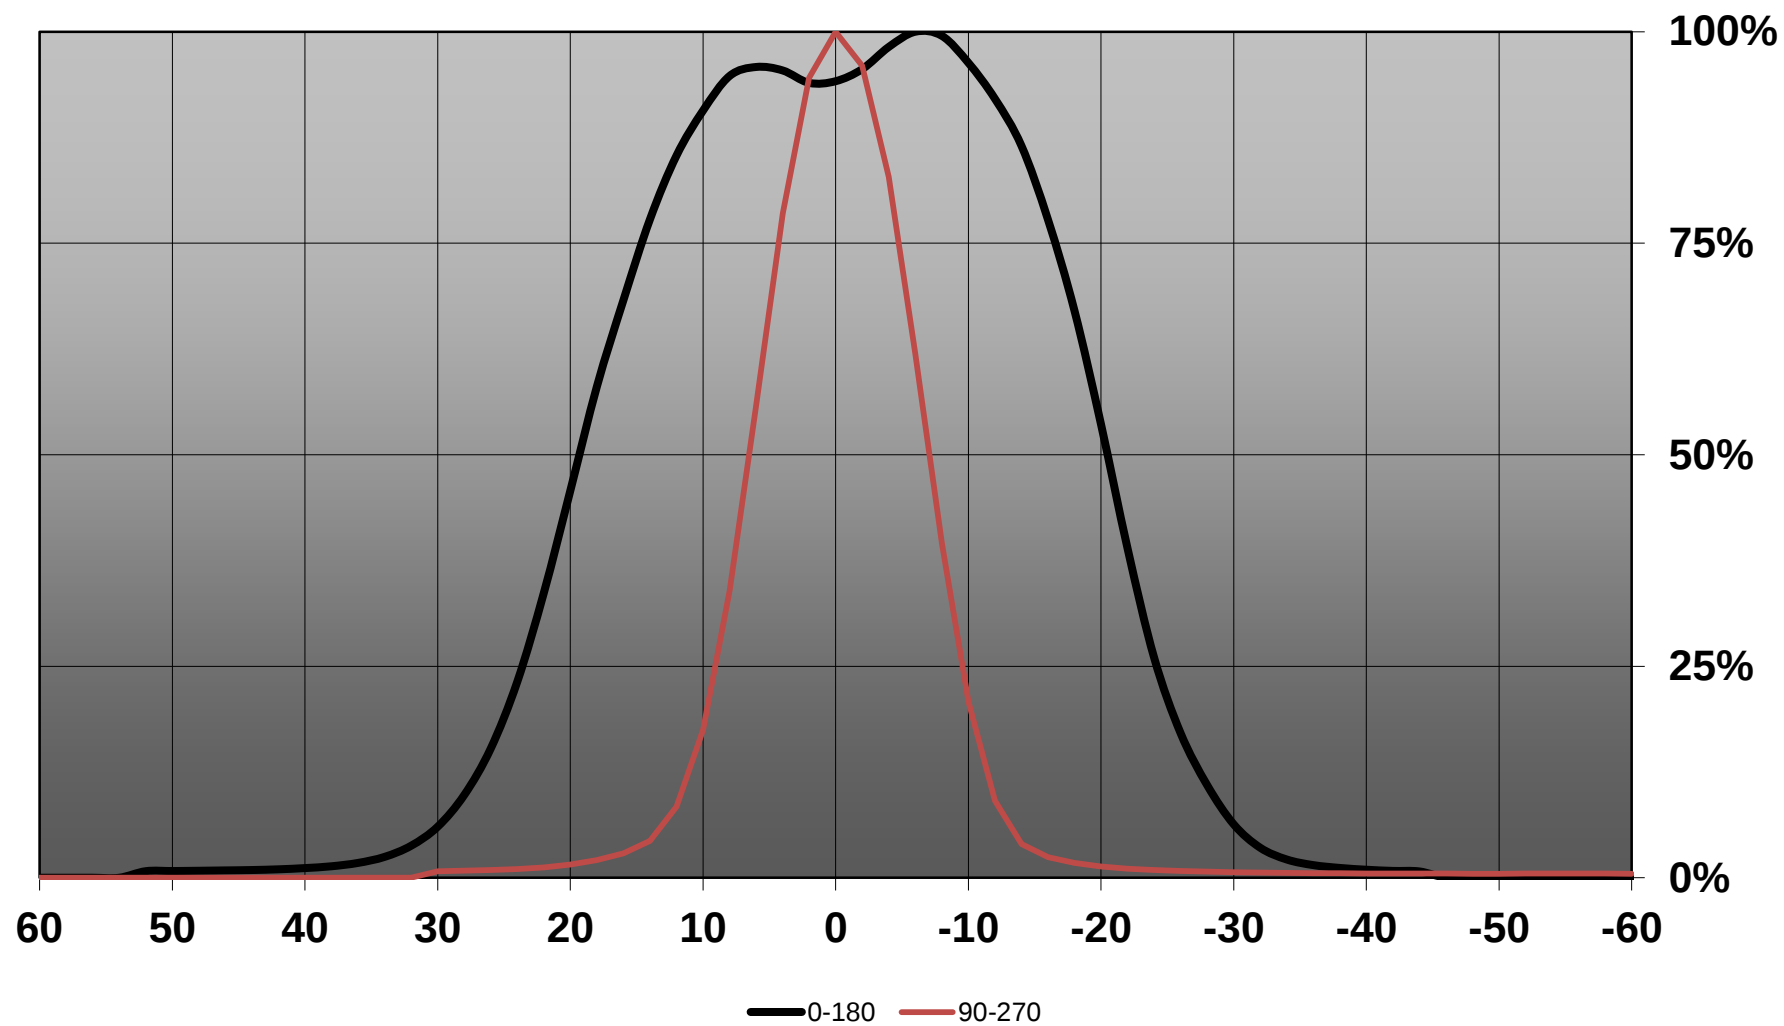

Ledil Oy CA11365-Laura-O-XP-tape CA11365-Laura-O-XP-tape / LDC (Linear)

Luminaire: Ledil Oy CA11365-Laura-O-XP-tape CA11365-Laura-O-XP-tape


Lamps: 1 x Cree XP-E white

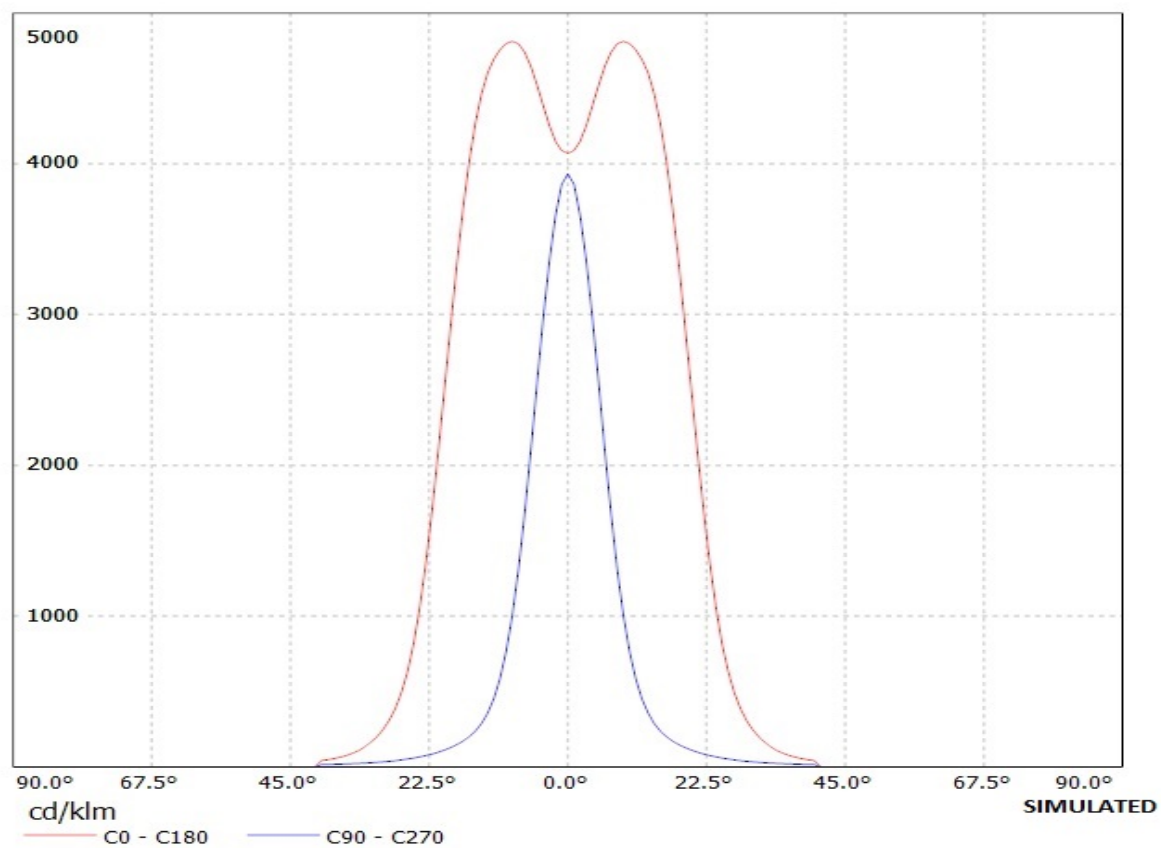


Ledil Oy CA12012_Laura-O-Pin-XP-G-tape / LDC (Linear)

Luminaire: Ledil Oy CA12012_Laura-O-Pin-XP-G-tape


Lamps: 1 x Cree XP-G 63,5lm 250mA Warm

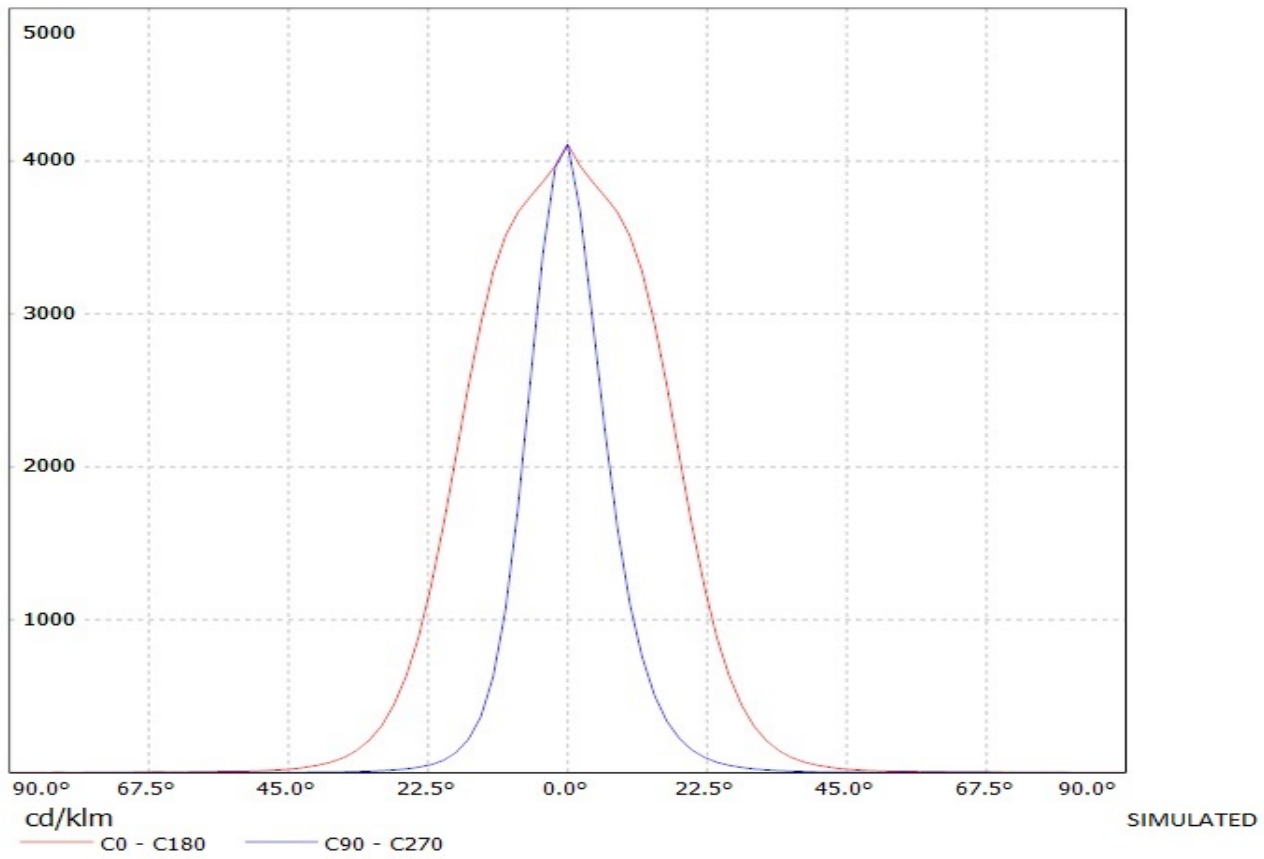


Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(XP-E2)
Lamps: 1 x Cree XP-E2 (92lm @ 250mA) CCT=5500K P=0.8W I=250mA

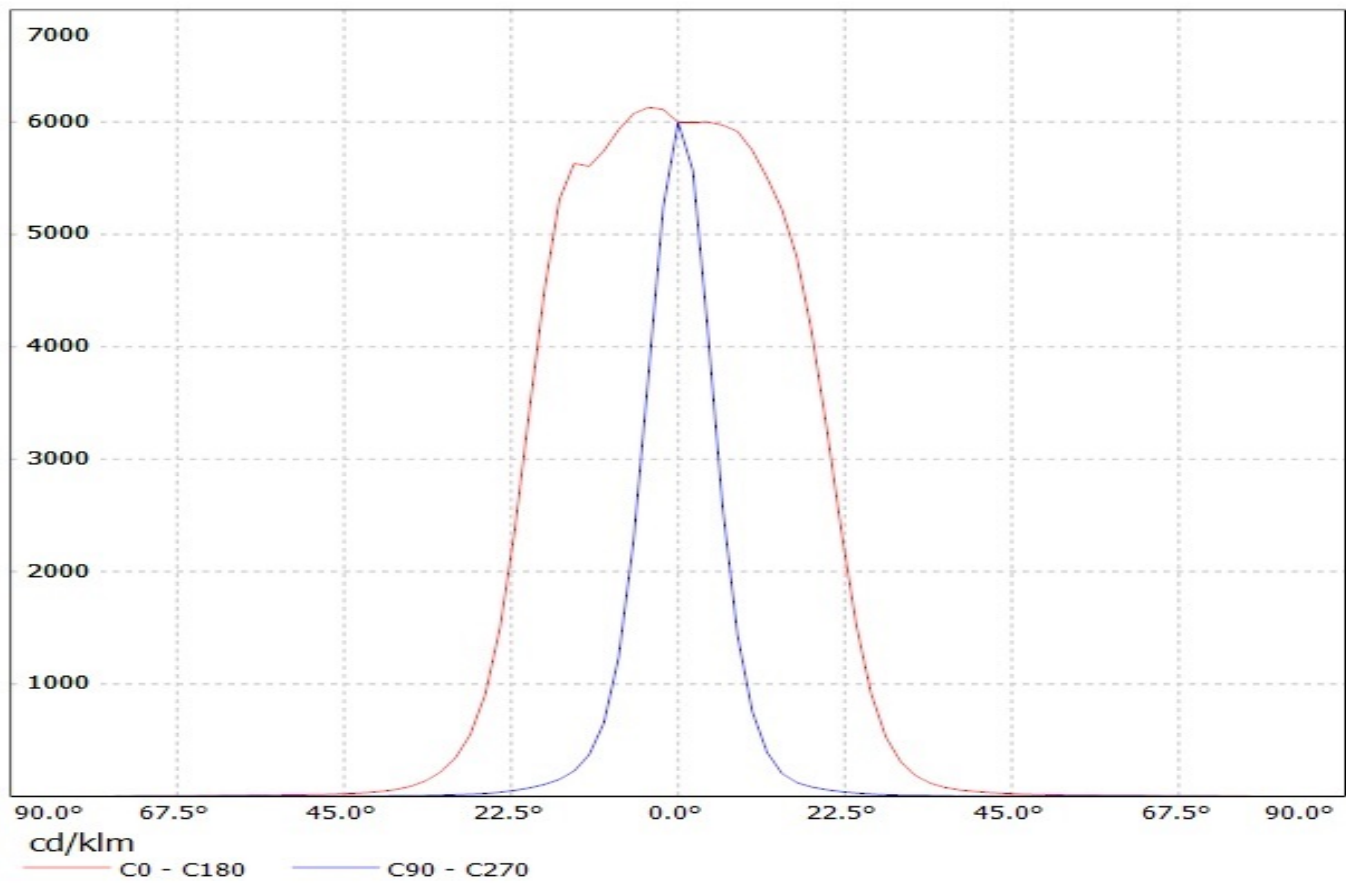


Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(Luxeon_Rebel_ES) Efficiency=90%
Lamps: 1 x Philips Lumileds Luxeon Rebel ES (91.3lm @ 250mA) CCT=4100K P=0.8W I=250mA

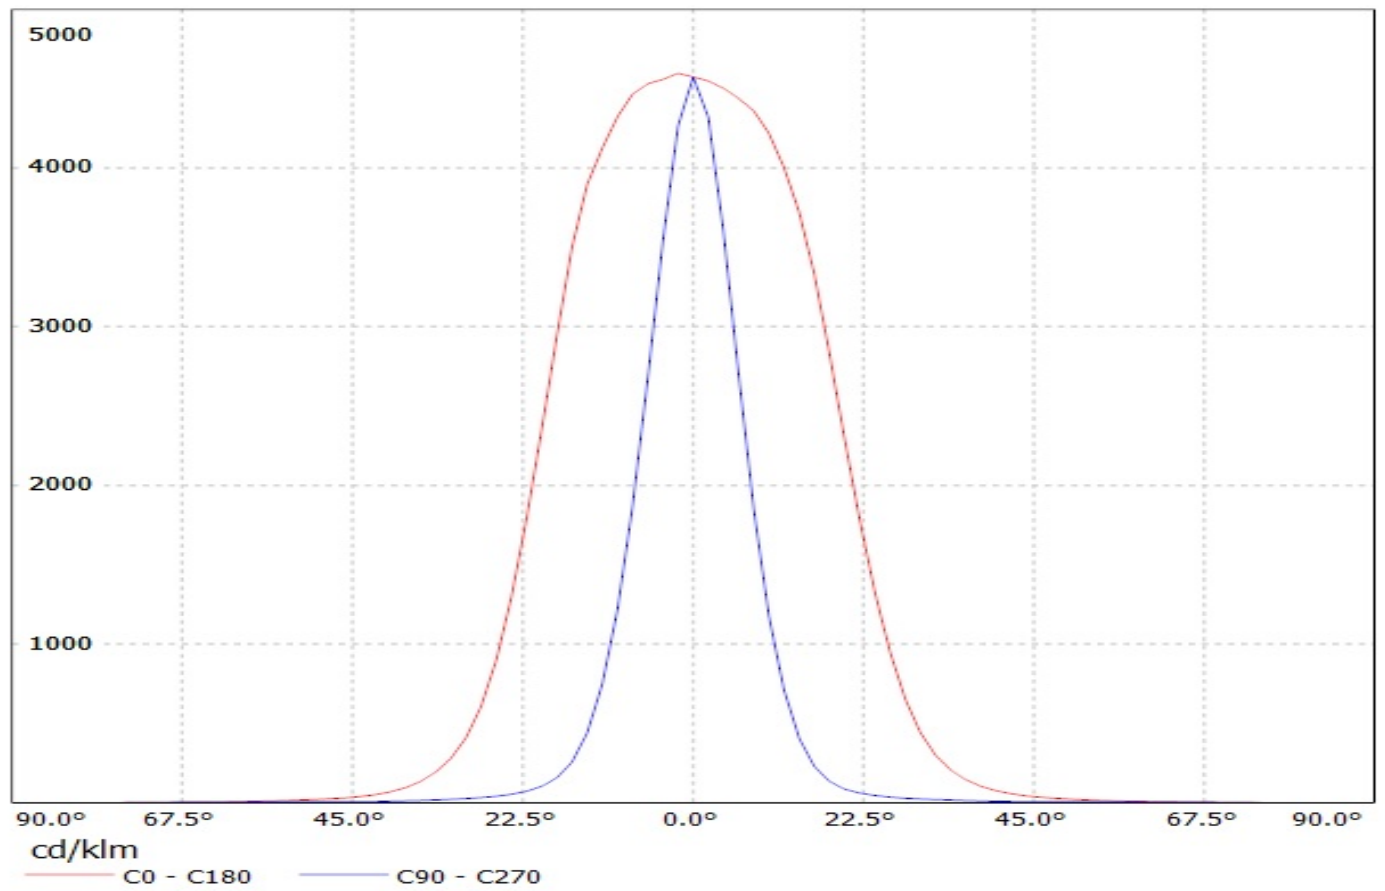

Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(NCSxx19B) Efficiency=90%
Lamps: 1 x Nichia NCSxx19B (NCSL119BE) 88.5lm @ 250mA CCT=3400K P=0.8W I=250mA

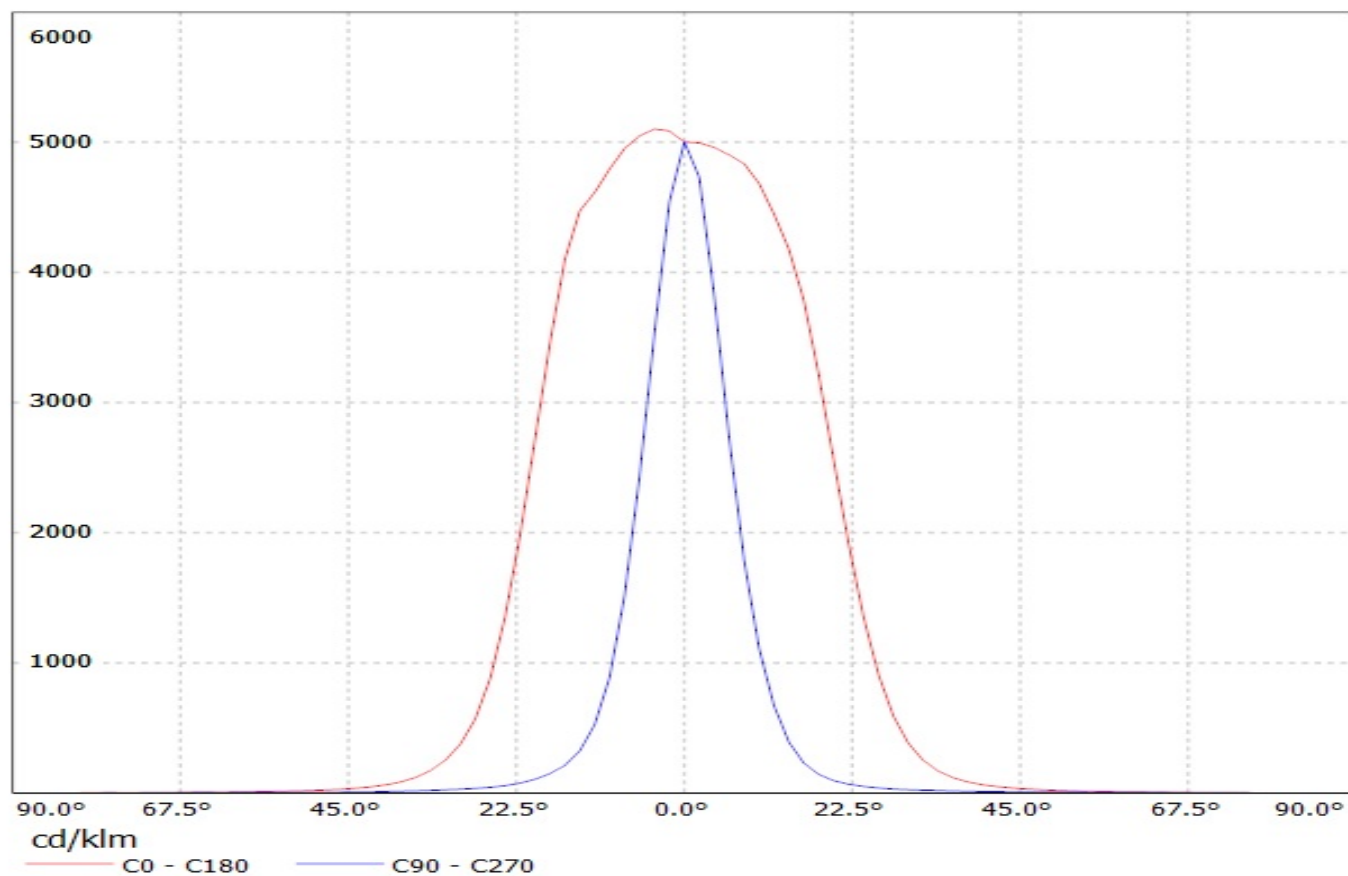


Luminaire: Ledil Oy CA12012_LAURA-O-PIN-EC (Osram Square EC 78lm @ 250mA) Efficiency=87%
Lamps: 1 x Osram Square EC 78lm @ 250mA

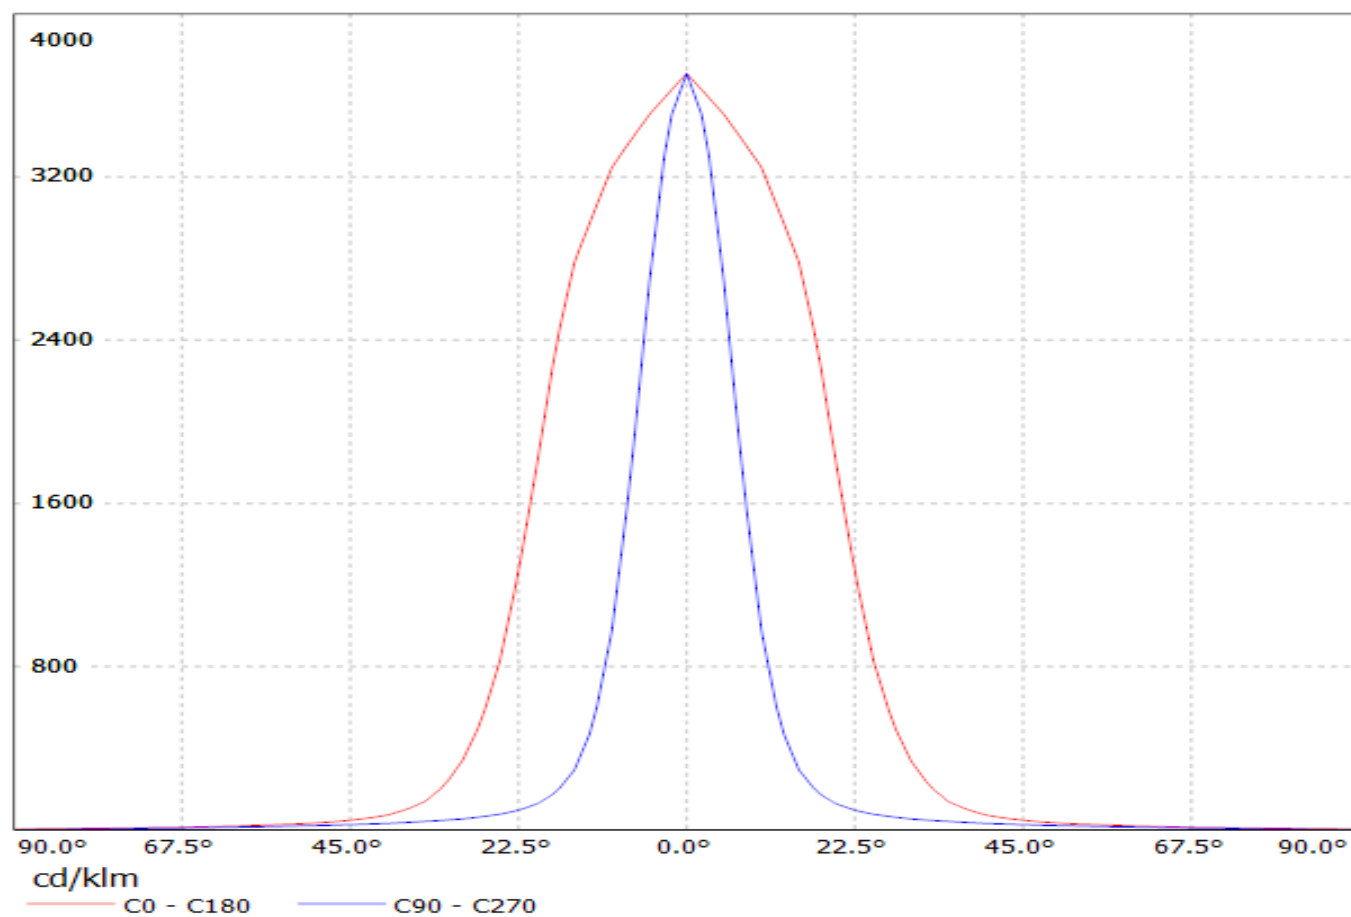


Ledil Oy CA11365-Laura-O-XP-tape CA11365-Laura-O-XP-tape / LDC (Polar)

Luminaire: Ledil Oy CA11365-Laura-O-XP-tape CA11365-Laura-O-XP-tape
Lamps: 1 x Cree XP-E white

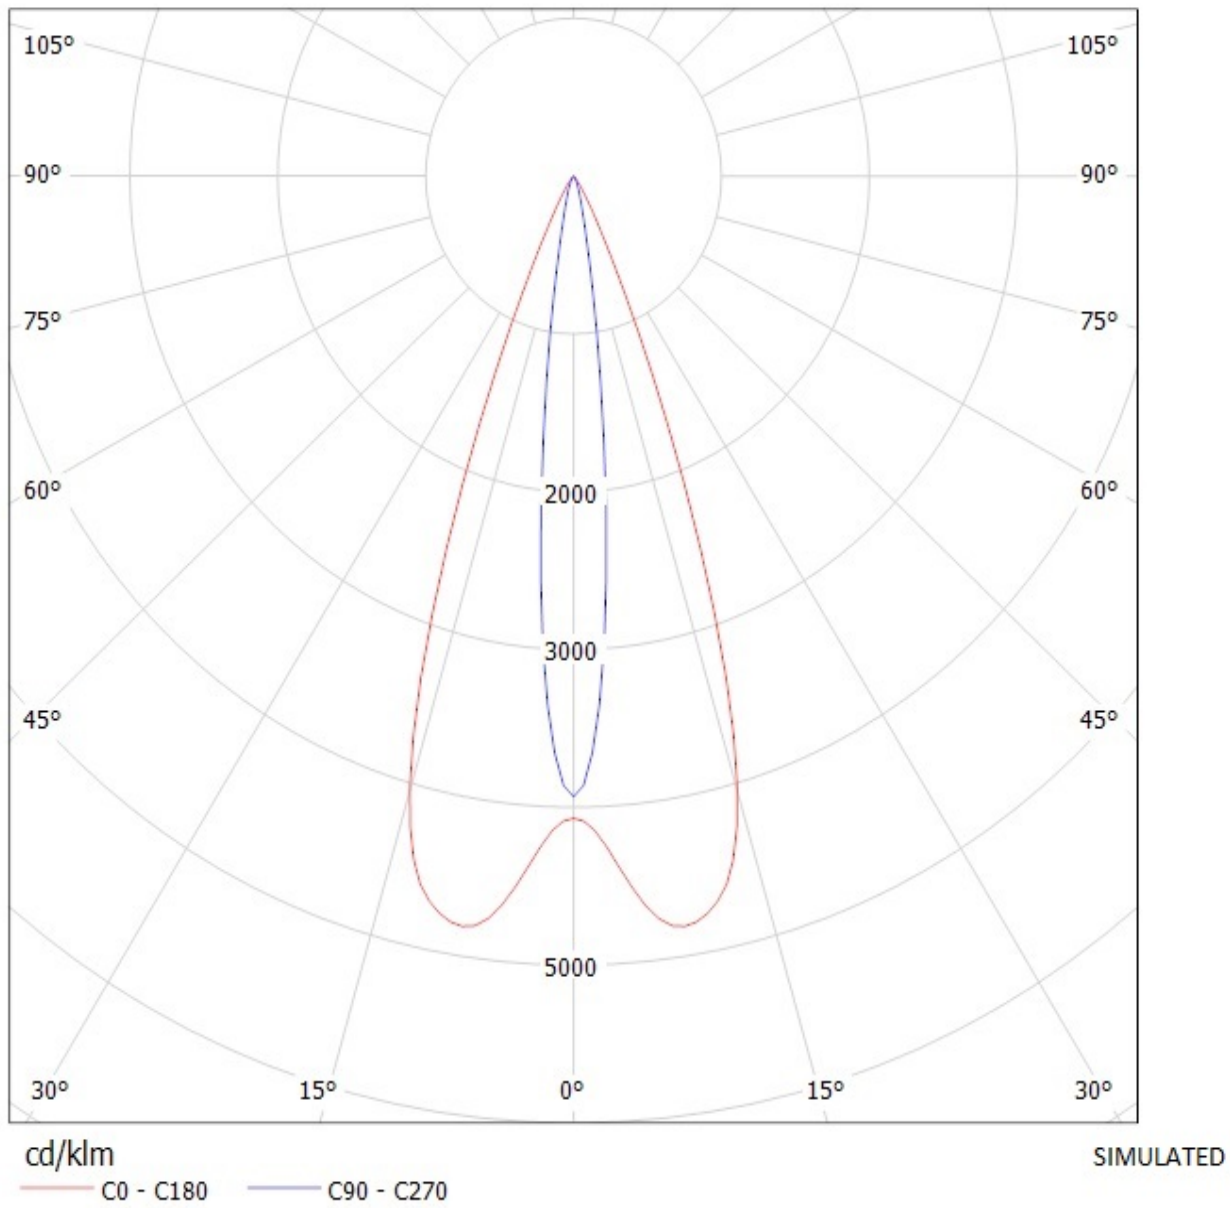


Luminaire: Ledil Oy CA12012_Laura-O-Pin-XP-G-tape


Lamps: 1 x Cree XP-G 63,5lm 250mA Warm

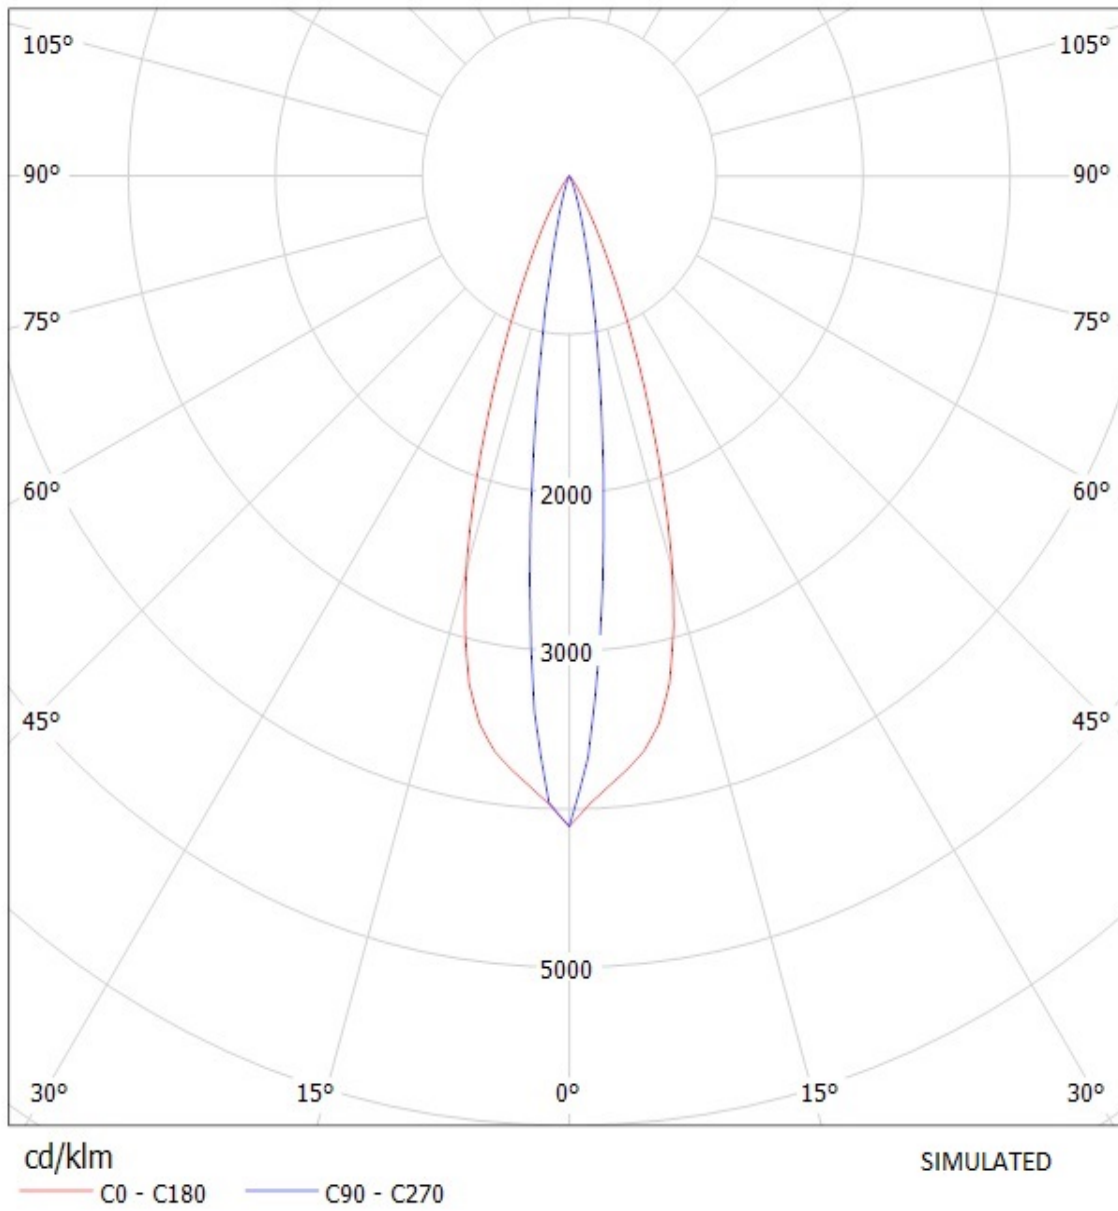


Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(XP-E2)
Lamps: 1 x Cree XP-E2 (92lm @ 250mA) CCT=5500K P=0.8W I=250mA

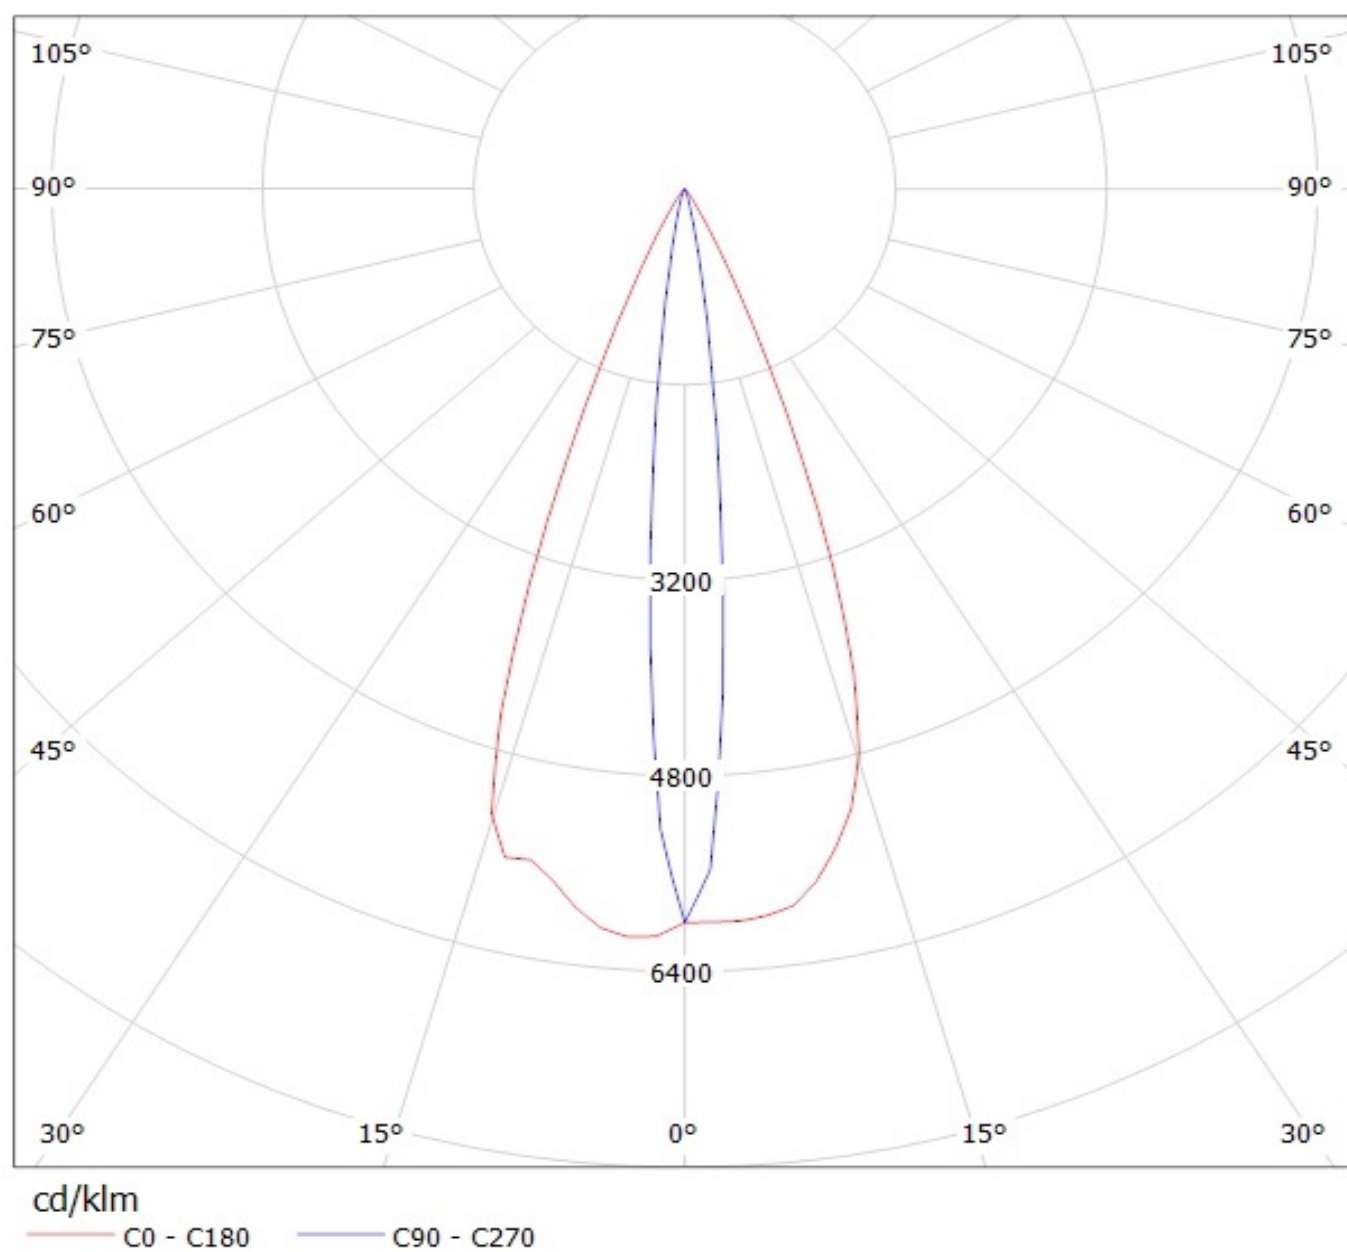


Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(Luxeon_Rebel_ES) Efficiency=90%
Lamps: 1 x Philips Lumileds Luxeon Rebel ES (91.3lm @ 250mA) CCT=4100K P=0.8W I=250mA

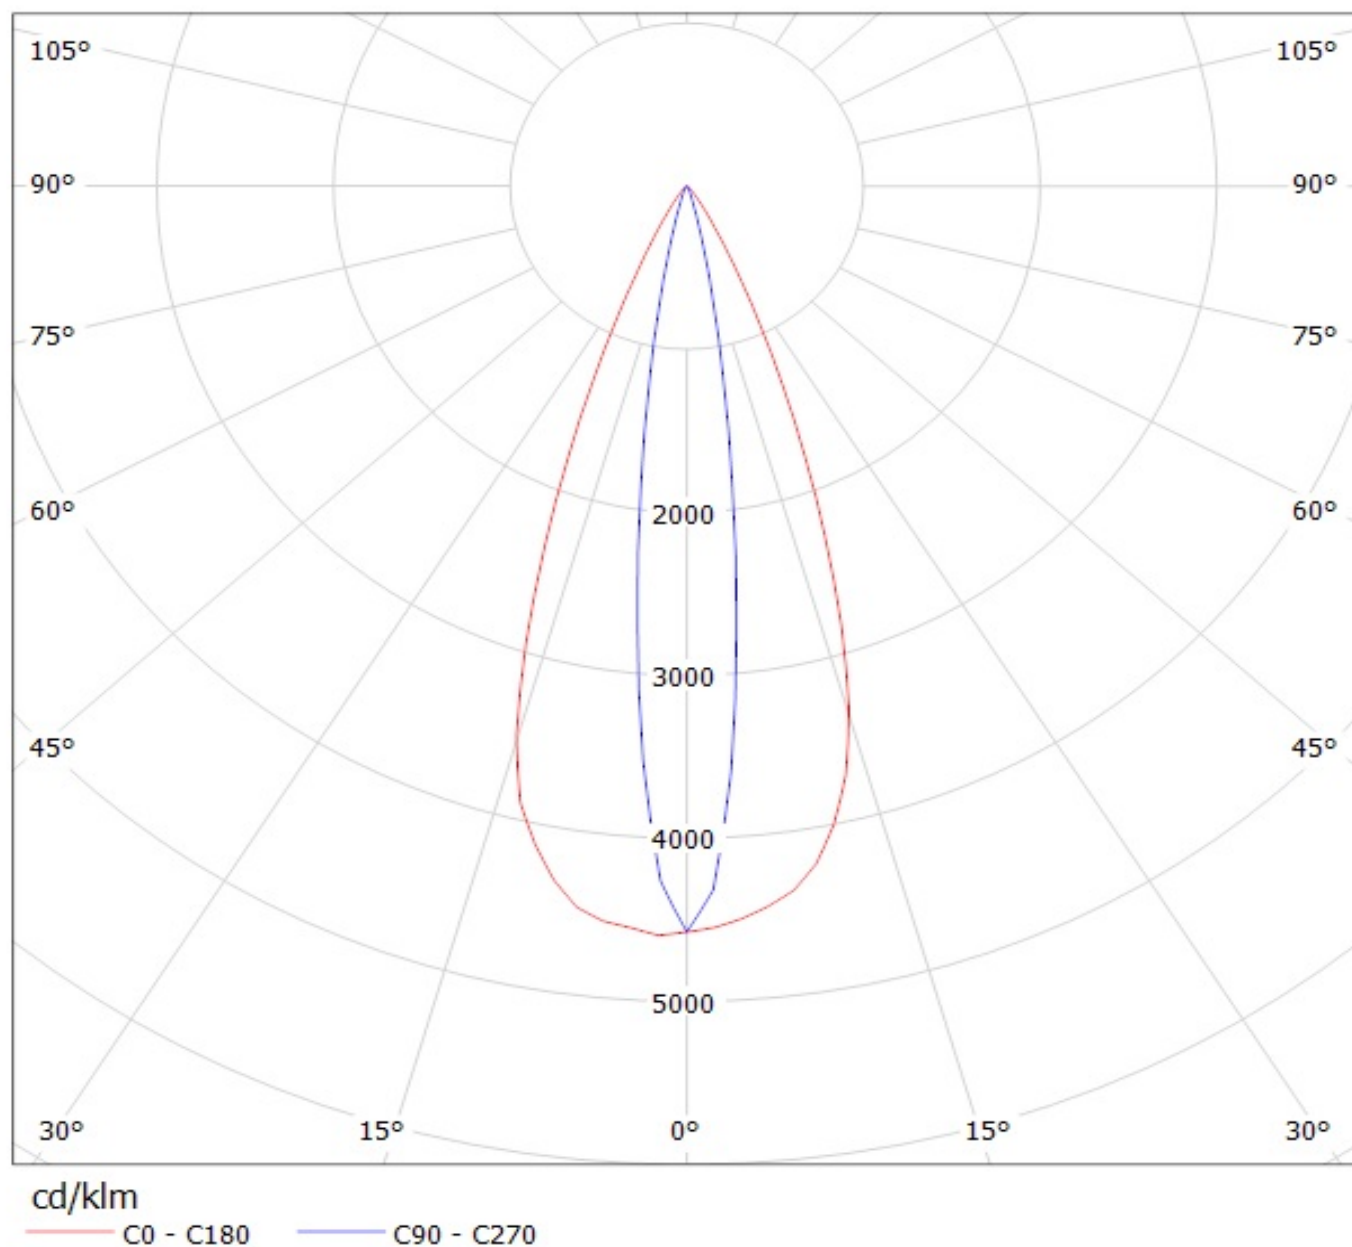

Luminaire: LEDil Oy CA12012_LAURA-O-PIN_(NCSxx19B) Efficiency=90%
Lamps: 1 x Nichia NCSxx19B (NCSL119BE) 88.5lm @ 250mA CCT=3400K P=0.8W I=250mA

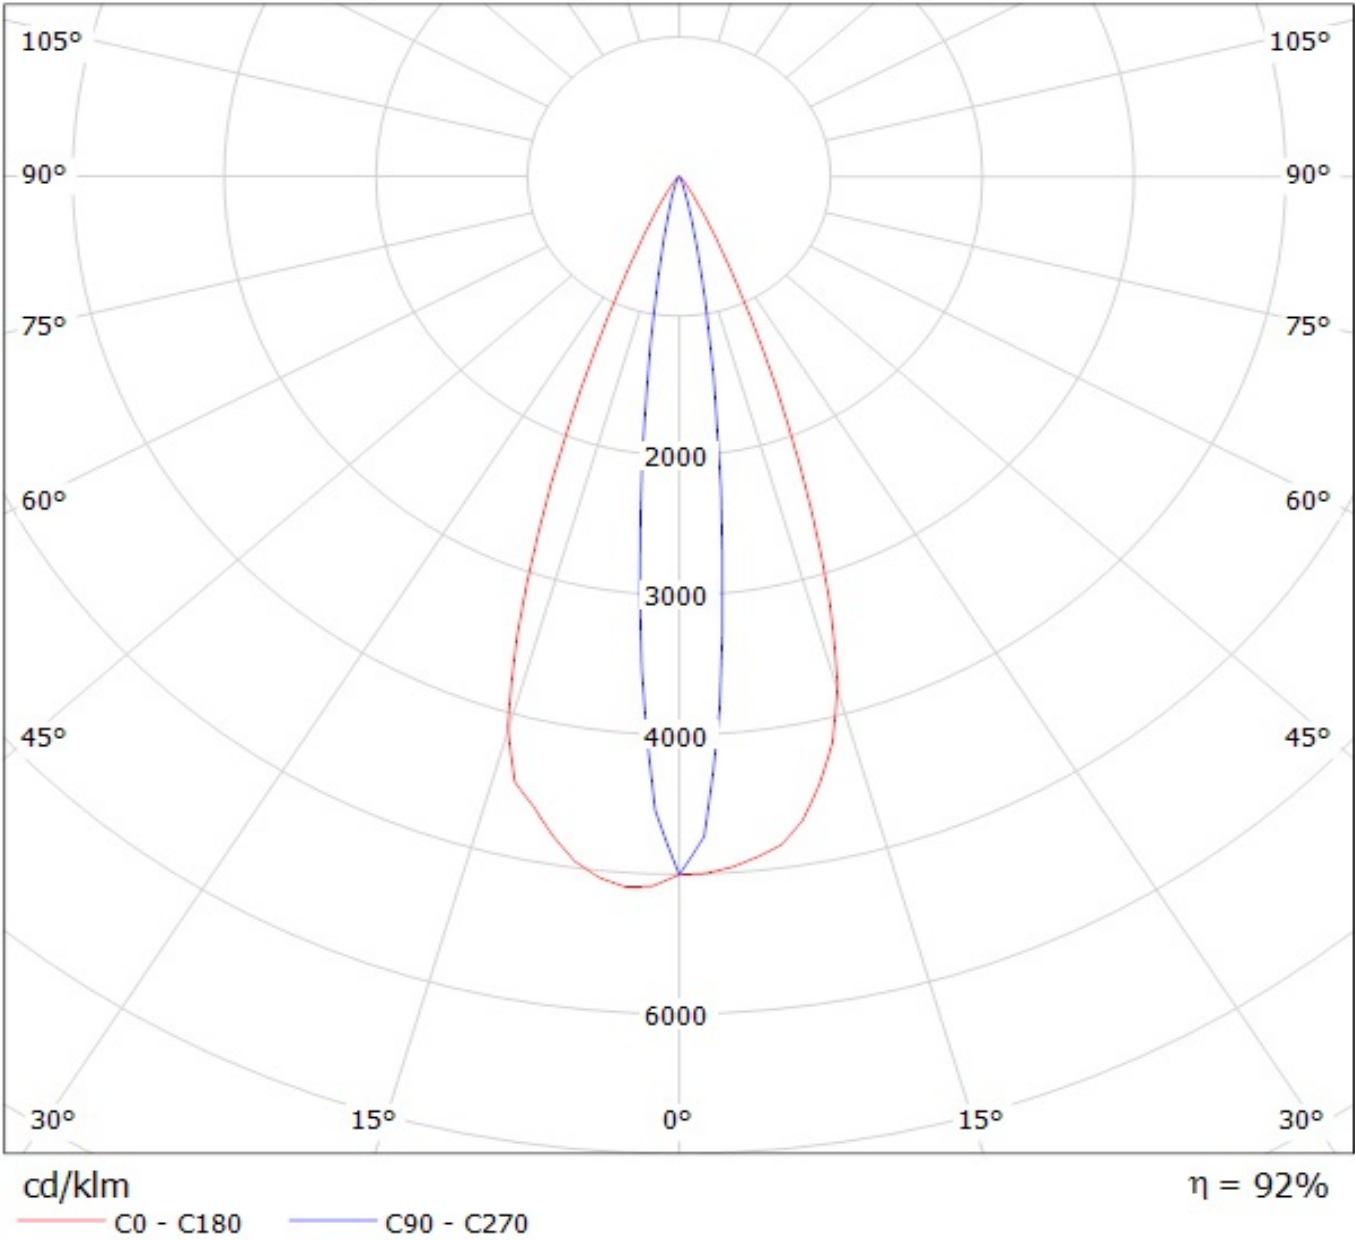

Luminaire: Ledil Oy CA12012_LAURA-O-PIN-EC (Osram Square EC 78lm @ 250mA) Efficiency=87%
Lamps: 1 x Osram Square EC 78lm @ 250mA

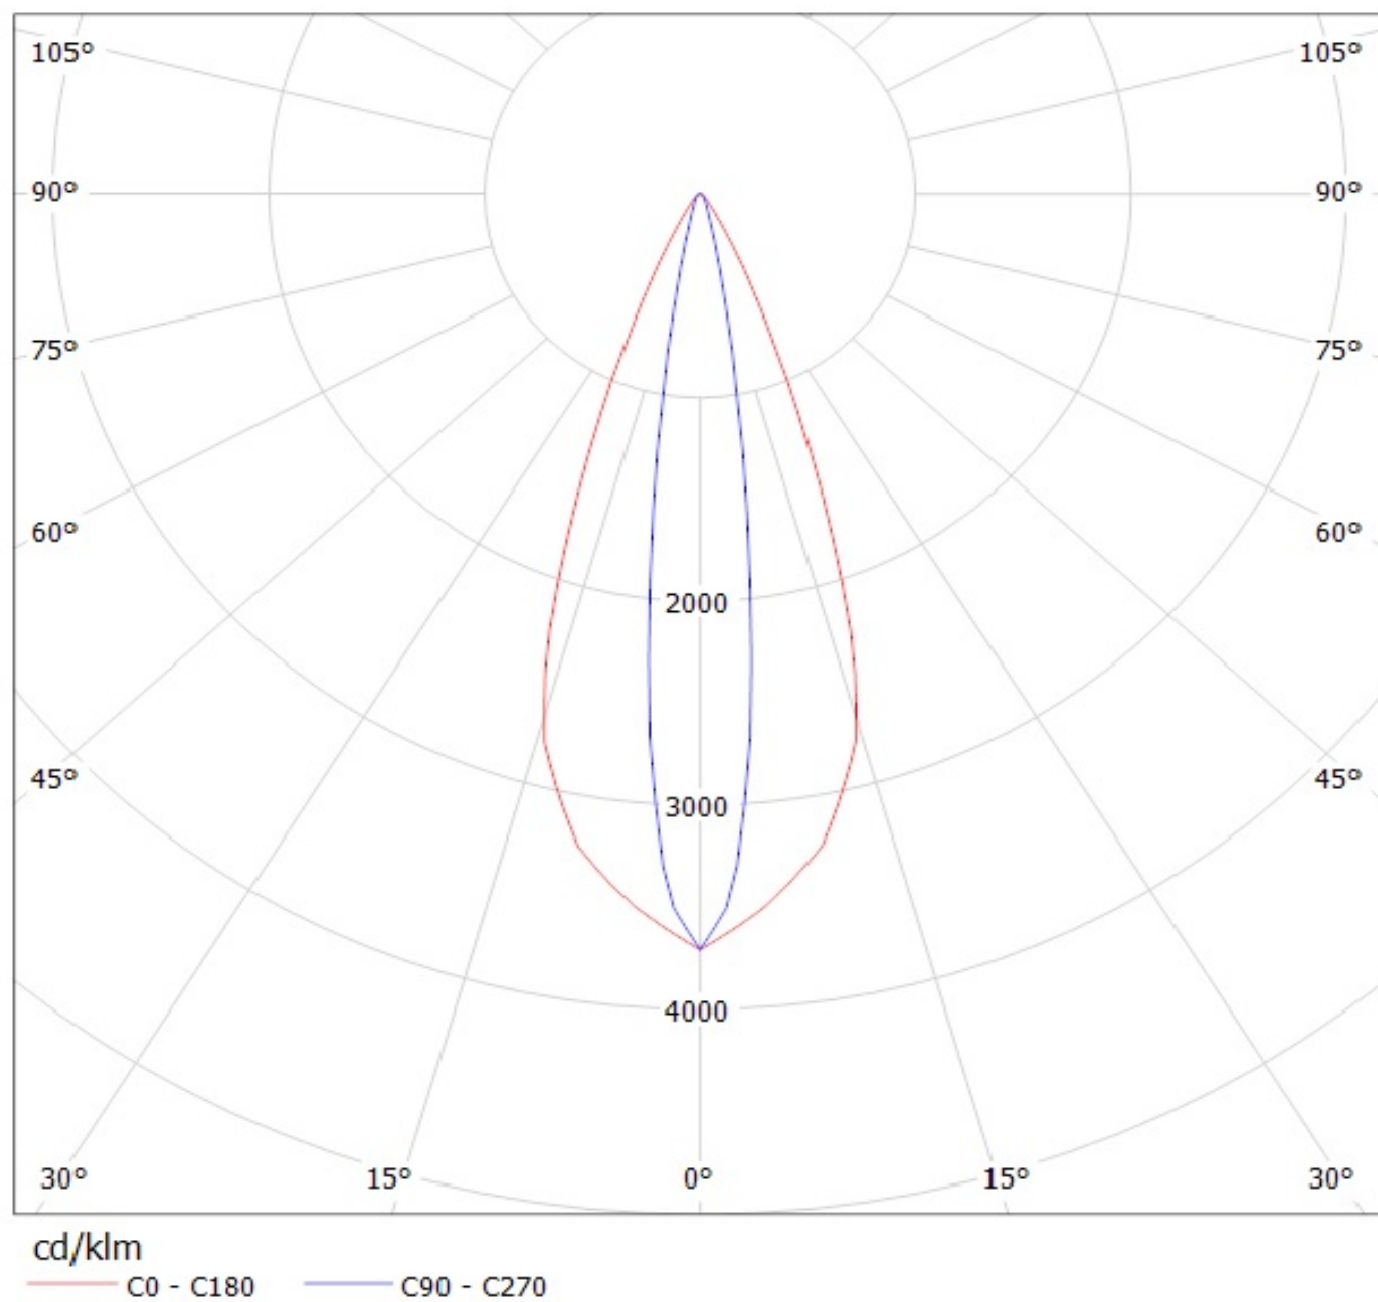

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com