




EC-23096-000

SHT 1.1

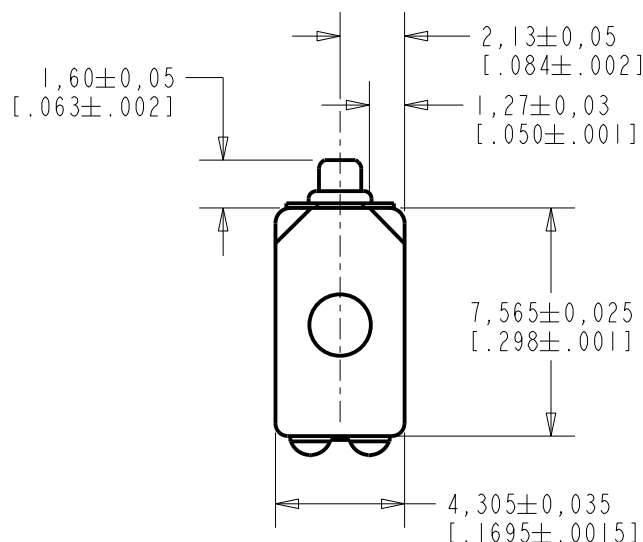

NOTES:

- 1 A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.
- 2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER.

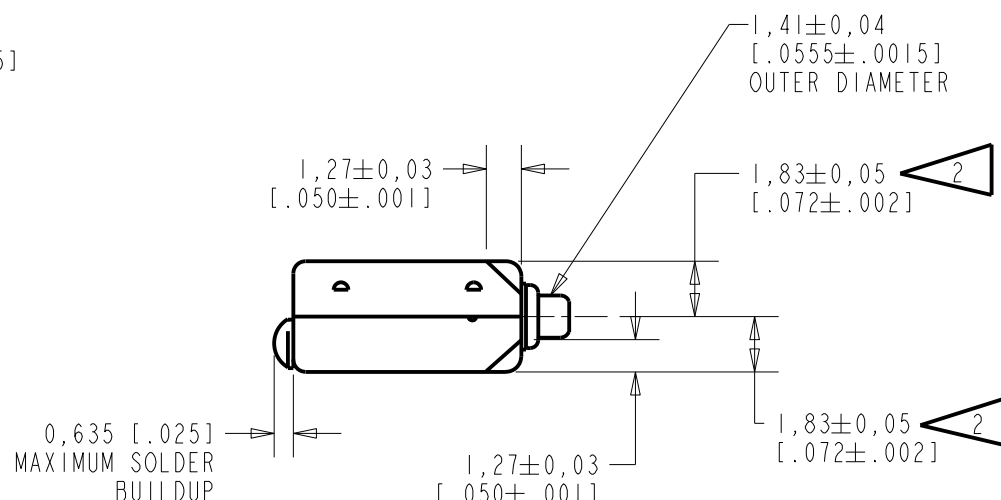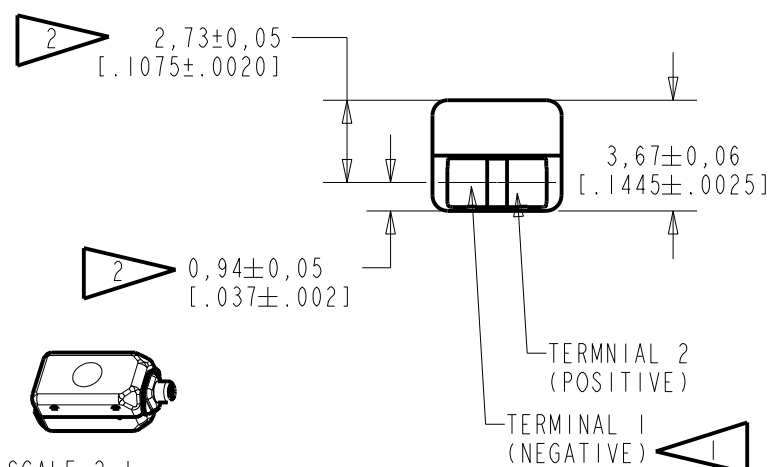

SCALE 2:1  
NOMINAL WEIGHT  
.42 GRAMS


DIMENSIONS IN MILLIMETERS [INCHES]

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

| Revision | C.O. #    | Implementation Date | RELEASE LEVEL | REVISION |
|----------|-----------|---------------------|---------------|----------|
| C        | CI0115009 | 7-11-13             | Active        | C        |
| B        | CI0106330 | 9-3-07              |               |          |
| A        | CI0103434 | 11-15-05            |               |          |

|                      |  |         |          |
|----------------------|--|---------|----------|
| SCALE: 4:1           |  | DR. BY  | DATE     |
| DO NOT SCALE DRAWING |  | CRG     | 11-15-05 |
| TITLE: RECEIVER      |  | CK. BY  | DATE     |
| OUTLINE DRAWING      |  | GJP     | 11-22-05 |
| EC-23096-000         |  | APP. BY | DATE     |
| SHT 1.1              |  | GJP     | 11-22-05 |

NO DAMPING

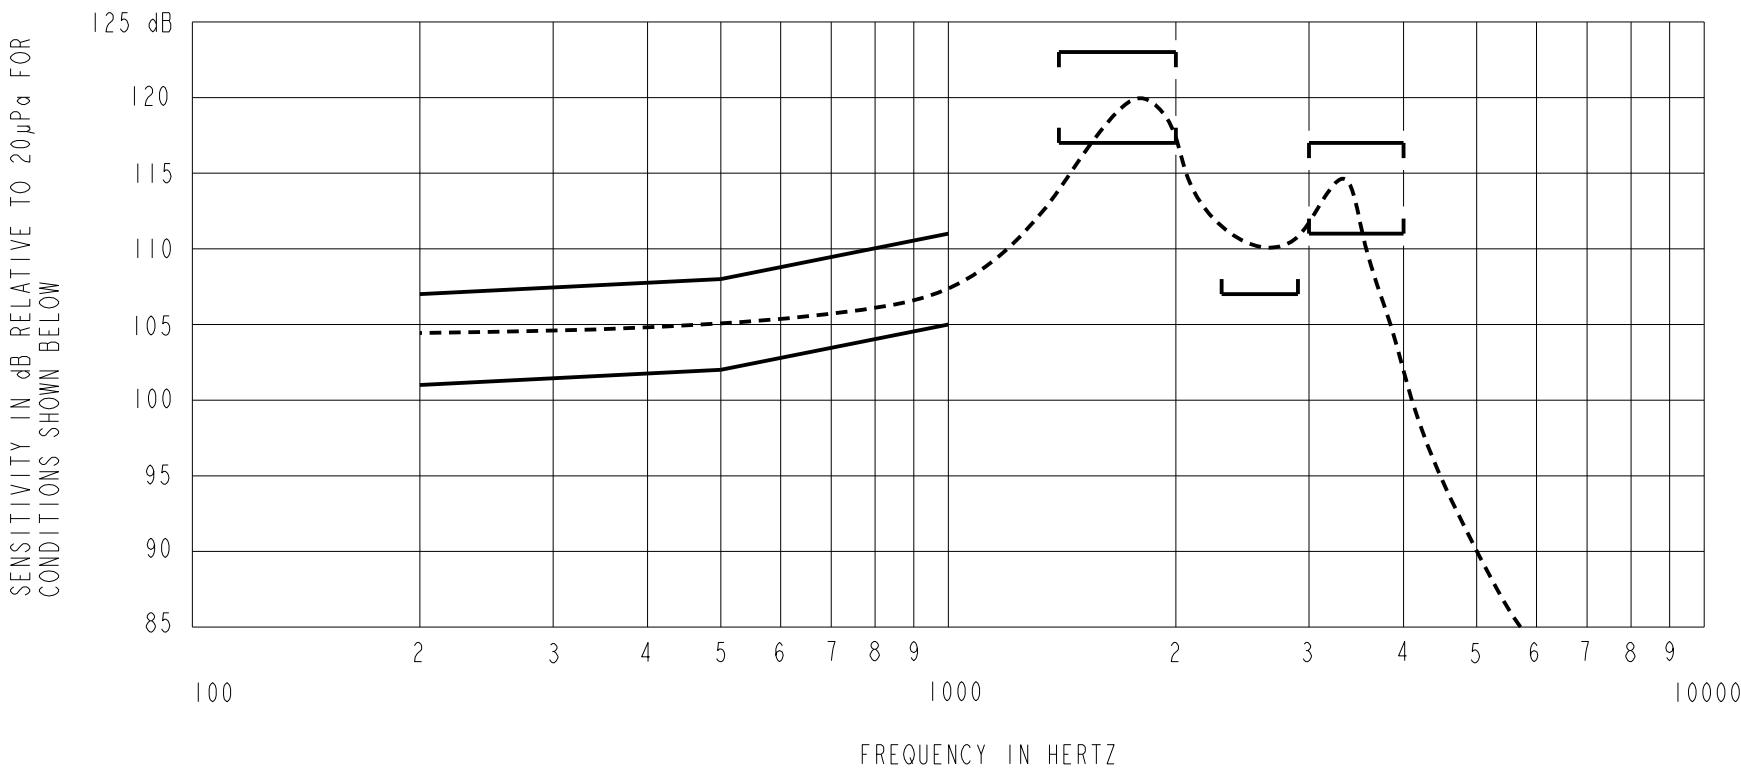

NOTES:

1. MEASUREMENTS MADE USING 10mm (.394") OF 1mm (.039") ID TUBE CONNECTED TO A SIMULATED ANSI S3.7 TYPE HA-3 COUPLER . (IEC 60318-5).
2. SENSITIVITY
- | FREQUENCY | MIN.  | MAX.  |
|-----------|-------|-------|
| 200       | 101.0 | 107.0 |
| 500       | 102.0 | 108.0 |
| 1000      | 105.0 | 111.0 |
| 1400-2000 | 117.0 | 123.0 |
| 2300-2900 | 107.0 | ---   |
| 3000-4000 | 111.0 | 117.0 |
3. RESPONSE, IMPEDANCE, AND DISTORTION MEASUREMENTS MADE USING THE ELECTRICAL TEST CONDITIONS SHOWN BELOW.
4. ELECTRICAL SOURCE IMPEDANCE MUST BE GREATER THAN 20 TIMES 1KHz IMPEDANCE FOR TEST CONDITIONS SHOWN BELOW.
5. INDIVIDUAL SPECIFICATIONS:

| PORT LOCATION | IMPEDANCE OHMS ±15% |       | DCR @20°C OHMS ±10% | DISTORTION |         | ELECTRICAL TEST CONDITIONS |       |
|---------------|---------------------|-------|---------------------|------------|---------|----------------------------|-------|
|               | 1KHz                | 500Hz |                     | MAX. %     | FREQ Hz | AC mA RMS                  | DC mA |
| 12S           | 840                 | 425   | 196                 | 10         | 800     | 0.77                       | 1.09  |

| Revision                  | C.O. #    | Implementation Date | RELEASE LEVEL                                                                                                                                                                                                |  | REVISION     |
|---------------------------|-----------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------|
| C                         | C10115009 | 7-11-13             | Active                                                                                                                                                                                                       |  | C            |
| B                         | C10106330 | 9-3-07              |                                                                                                                                                                                                              |  |              |
| A                         | C10103434 | 11-15-05            |                                                                                                                                                                                                              |  |              |
| TITLE:                    |           |                     | WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION |  | DR. BY DATE  |
|                           |           |                     | RECEIVER                                                                                                                                                                                                     |  | CRG 11-15-05 |
| PERFORMANCE SPECIFICATION |           |                     | EC-23096-000                                                                                                                                                                                                 |  | CK. BY DATE  |
|                           |           |                     | SHT 2.1                                                                                                                                                                                                      |  | GJP 11-22-05 |
|                           |           |                     |                                                                                                                                                                                                              |  | APP. BY DATE |
|                           |           |                     |                                                                                                                                                                                                              |  | GJP 11-22-05 |

KNOWLES ELECTRONICS  
ITASCA, ILLINOIS U.S.A.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)