


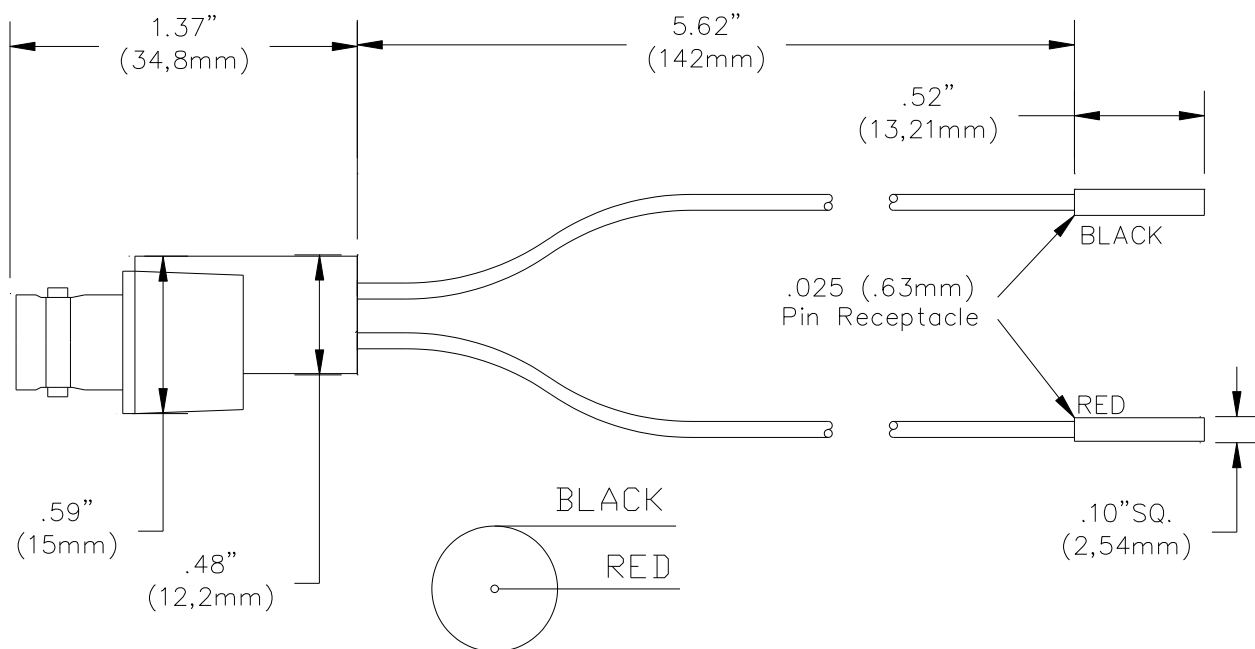

SCHEMATIC

FEATURES:

- ✓ Converts BNC (male) cables / connectors to .025" (.63mm) receptacles for attachment to square or round pins on test boards, etc.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Wire: 22 AWG, PVC Insulated

Pin Receptacle: Body: Gold Plated Phosphor Bronze

Insulation: ABS, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 500 VRMS Max.

Operating Temperature: +131°F (+55°C) Max.

ORDERING INFORMATION: Model 5069*

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com