

Series 11675

Quick-Connect Power Distribution Blocks

SPECIFICATIONS

Rating: 40A, 250V

Poles: 2 to 6 poles with (3) .250" quick-connect terminals per pole

Wire Range: #8-14 AWG CU



Torque Rating: 18 in.-lb.

Operating Temperature: 150°C

Design: Screw connections for field wiring. Quick connects reduce cost of internal wiring.

Breakdown Voltage:

Agency Information: UL/CSA; CE Certified

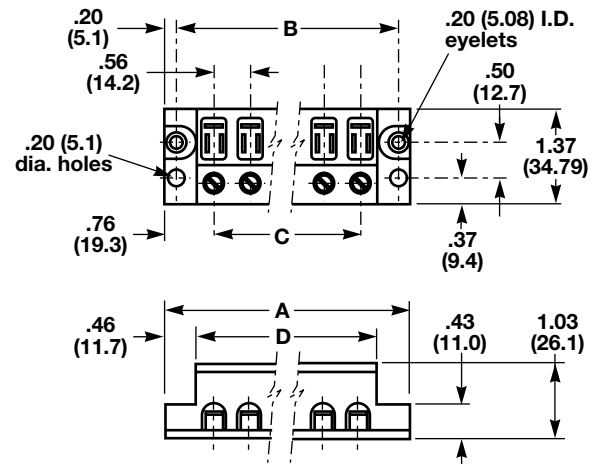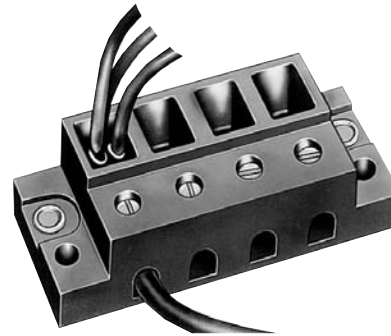

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Series 11725

Quick-Connect Power Distribution Blocks

SPECIFICATIONS

Rating: 70A, 600V; UL/CSA

Poles: 2, 3 or 4 poles with (4) .250" quick-connect terminals per pole


Wire Range: #2-14 AWG CU / #2-8 AWG AL

Torque Rating: 45 in.-lb.

Operating Temperature: 150°C

Design: Screw connections for field wiring. Quick connects reduce cost of internal wiring.

Agency Information: UL/CSA E62622; CE Certified

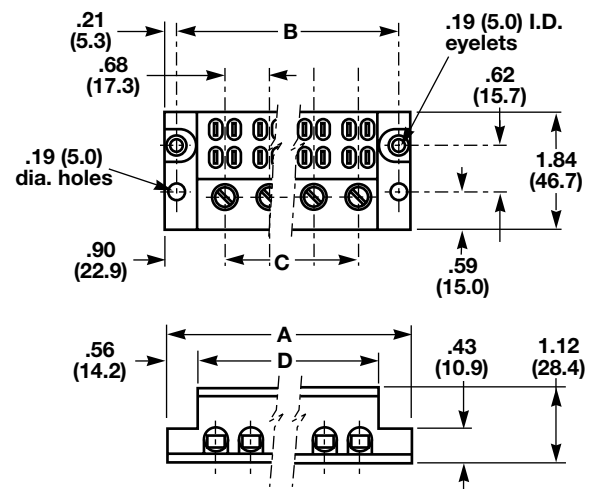

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Series EN


Power Blocks
1.78" Centers

SPECIFICATIONS

Rating: 285A, 600V; UL/CSA
Wire Range: Line Connection: #300MCM-#4 CU/AL
Load Connection: (6) #6-14AWG CU
(6) #8-14 AWG AL
Material: Molded material; Black, UL rated
94V-2 thermoplastic
Operating Temperature: 125°C
Torque Rating: 200 in-lb. line terminal, 20 in-lb. load terminal
Agency Information: UL/CSA; CE Certified
Covers: Not available



Series	A	B
EN61	1.38	1.78
EN62	3.15	3.62
EN63	4.93	5.37

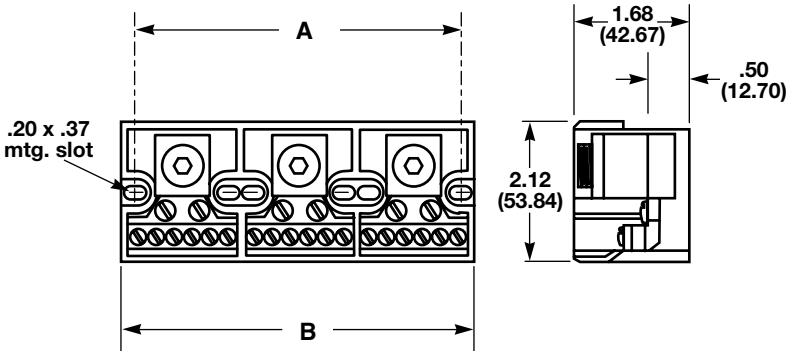

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com