


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect

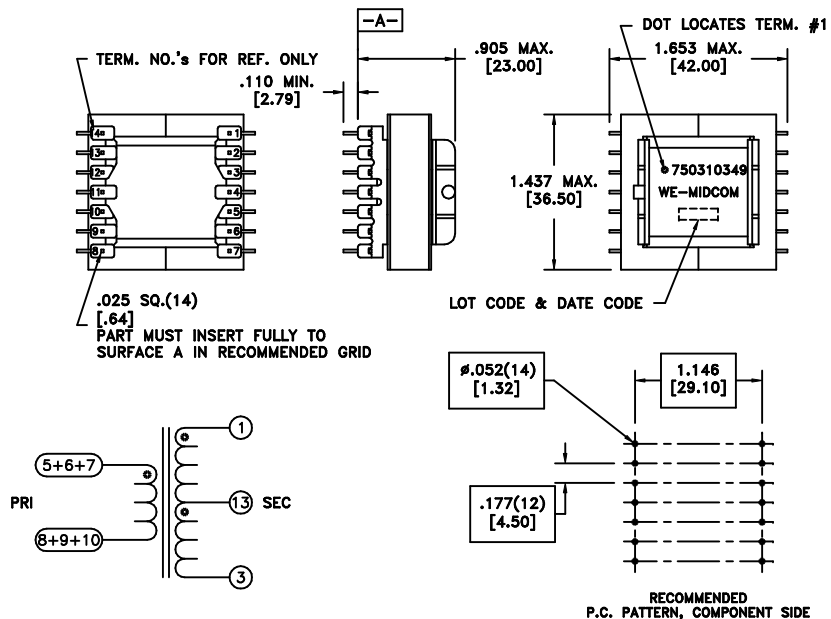

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	7-8 tie(5+6+7, 8+9+10), @20°C	0.010 ohms max.
D.C. RESISTANCE	1-3 @20°C	0.500 ohms max., 0.120 typ.
INDUCTANCE	7-8 tie(5+6+7, 8+9+10), 50kHz, 10mVAC, Ls	5.0uH ±10%
SATURATION CURRENT @85°C	20% rolloff from initial	25ADC
CONTINUOUS CURRENT	40°C temp rise from ambient	18A
LEAKAGE INDUCTANCE	7-8 tie(1+3, 5+6+7, 8+9+10), 100kHz, 1.0VAC, Ls	100nH max.
DIELECTRIC	PRI-SEC 1250VAC, 1 second	1000VAC, 1 minute
URNS RATIO	(13-3):(1-13)	1:1, ±1%
URNS RATIO	(1-3):(5-10)	10:1, ±1%
URNS RATIO	(1-3):(6-9)	10:1, ±1%
URNS RATIO	(1-3):(7-8)	10:1, ±1%

REV.	DATE	Packaging Specifications
		Method: Tray 68
		PKG-0838
		www.we-online.com/midcom
6B	8/11	
6A	2/09	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750310349



PART NO.
750310349
SPECIFICATION SHEET 1 OF 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com