


NOTES:

1. MATERIALS OF CONSTRUCTION:  
CONNECTOR BODY = ZINC DIE CAST, NICKEL PLATED (.000100 THICK MIN)  
REAR COVER = ZINC DIE CAST, NICKEL PLATED  
CENTER CONTACTS = PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATED (.000100 THICK MIN)  
IN CONTACT AREA, CONTACT TAILS ARE TIN OVER NICKEL (.000100 THICK MIN)  
GROUNDING TERMINAL = COPPER, TIN PLATED (.000080 THICK)  
MOUNTING HOOKS = BRASS, TIN PLATED (.000080 THICK MIN)  
LOCK WASHER = PHOSPHOR BRONZE , NICKEL PLATED (.000080 THICK MIN)  
SPANNER NUT = BRASS, NICKEL PLATED (.000080 THICK MIN)  
INSULATORS = POLYPROPYLENE UL94 HB  
FASTENERS = STEEL  
RETENTION INSULATOR = PBT+15% GLASS FIBER  
SPACER = PBT+15% GLASS FIBER

2. ELECTRICAL:  
A. IMPEDANCE: 75 OHM  
B. FREQUENCY RANGE: DC - 500 MHz

3. PACKAGING:  
A. BULK PACKAGED IN TRAY  
B. QUANTITY = 20 PIECES  
C. INCLUDES SPANNER NUT AND LOCK WASHER




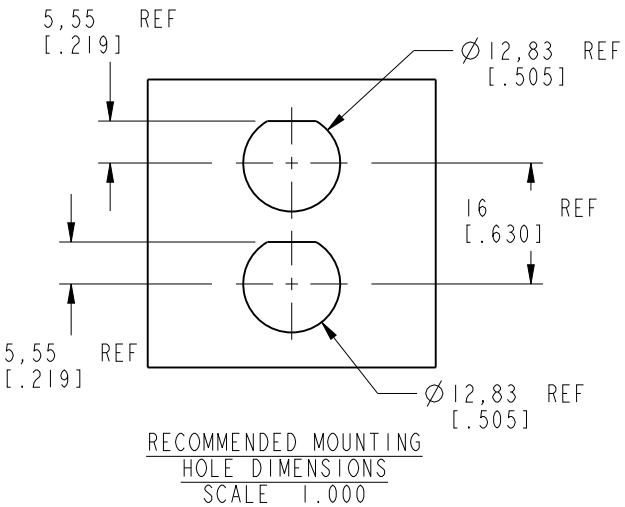


CUSTOMER OUTLINE DRAWING  
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	4/19/01	43739	CPM
B	SEE SHEET 1	5/22/01	43762	CPM
C	MAIN VIEW 6.35 REF WAS 6.06 REF	11/14/01	43887	CPM
D	REPLACED HEX NUT WITH SPANNER NUT	11/5/03	44660	JML
E	ADDED 50 OHM	12/16/04	45177	CPM
F	75 OHM WAS INCORECTLY SPECIFIED AS 50 OHM	5/4/06	46061	MAH
G	CHANGED SMOOTH NUTS TO KNURLD NUTS (KIT 31-13336)	6/29/06	46136	MY
H	SEE SHEET 1	1/27/14	49867	JTS

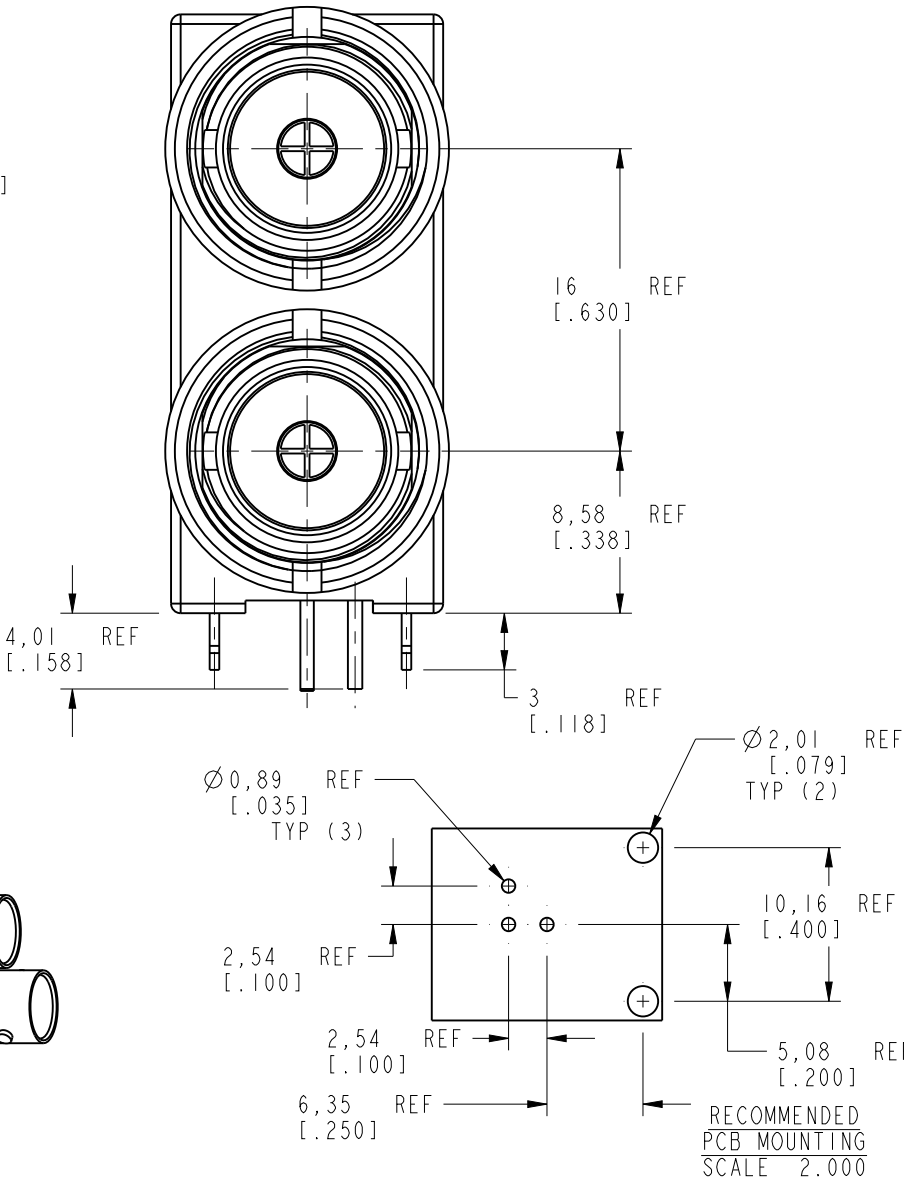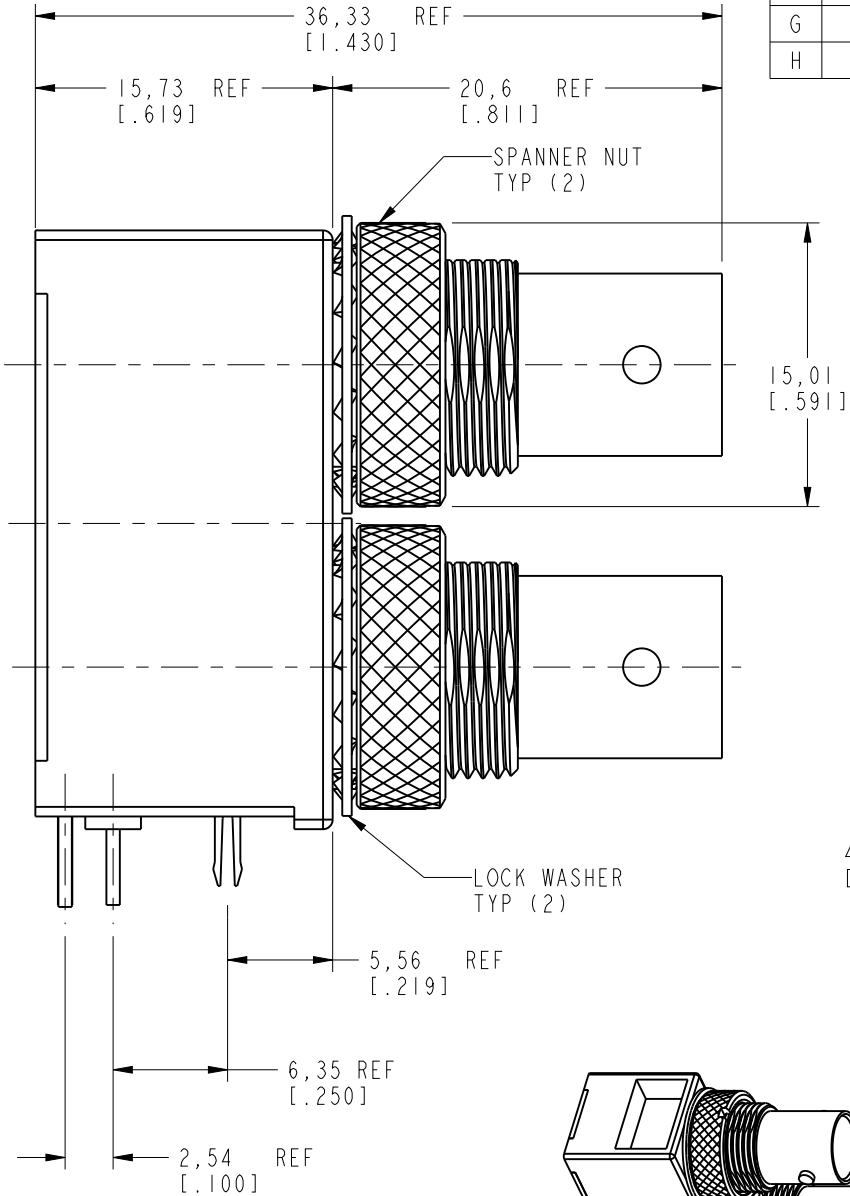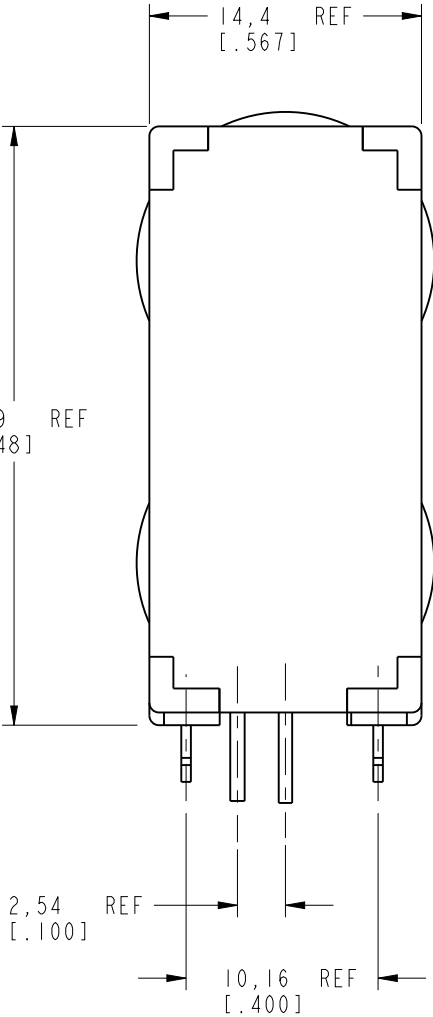

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL -	DRAWN C. McGRATH	DATE 05-Apr-01
REFERENCE EAR # 248 AND	ENGINEER O. BARTHELMES	DATE 05-Apr-01
CONFIGURATION LEVEL: In Work	APPROVED O. BARTHELMES	DATE 4/11/01
FINISH	CAD FILE	

TITLE DUAL PORT BNC PCB MOUNT RECEPTACLE HOOK 75 OHMS	SCALE: 2.5:1.0	SHEET 2 OF 2
DWG SIZE B	REV H	

Amphenol RF www.amphenolrf.com
DRAWING NO.B705001-NPB3G-75
ITEM NO. B705001-NPB3G-75
PART NO.31-6051

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)